

CHINEN 驰能[®]

—— 美食餐饮设备专家 ——
Food and Catering Equipmeng Experts



商厨设备解决方案

COMMERCIAL KITCHEN
EQUIPMENT SOLUTIONS



驰 能 · 祝 您 马 到 功 成

CHINENG · WISHING YOU IMMEDIATE SUCCESS

CHINEN 驰能®

—— 美食餐饮设备专家 ——
Food and Catering Equipment Experts

广东玖尚电子科技有限公司
Guangdong Jiushang Electronic Technology Co., LTD.

20^{years} 年

多年行业的积累
Industry accumulation

30^{groups} 组

30多组商厨产品研发团队
教授级工程师15人 中高级技术人员多名
Commercial kitchen product R&D team
15 professor level engineers and multiple senior technical personnel

10000+
售后服务网点
After sales service outlets

720000+
品牌商家选择
Brand merchant selection

产品覆盖了全品类的商厨设备
我们的宗旨是打造商厨设备高端品牌

The product covers the entire category of commercial kitchen equipment
Our aim is to create a high-end brand of commercial kitchen equipment



■ 驰能简介 / ABOUT CHINENG

广东玖尚电子科技有限公司创立于2014年，旗下核心品牌“驰能CHINENG”专注于商用厨具领域，致力于为全球餐饮行业提供智能化、高效化的设备及一站式解决方案。公司从商用电磁炉起步，逐步拓展产品线，现已覆盖加热、清洗处理、食品机械、制冷、自动智能化等全品类产品，并延伸至厨房设计、工程及综合服务领域。驰能始终坚持“研、产、销”直连客户的精简模式，通过直营体系直接服务客户，倾听用户需求，开创了“新商厨模式”的创新之路。



Guangdong Jiushang Electronic Technology Co., Ltd. was founded in 2014, the core brand "CHINENG" focuses on the field of commercial kitchenware, committed to providing intelligent and efficient equipment and one-stop solutions for the global catering industry. The company started with commercial induction cookers and gradually expanded its product line, now covering a full range of products such as heating, cleaning and processing, food processing machinery, refrigeration, automatic intelligence, and extending to kitchen design, engineering, and comprehensive services.



品牌故事 / BRAND STORY

“驰能”二字，源于“驰骋万里，能所不能”的信念。2012年，创始人以坚定的品牌愿景重金购入商标，LOGO中的骏马图腾与“驰”字相呼应，象征着驰能人以速度致胜、以韧性克难的精神。

The word 'CHINENG' originates from the belief that 'galloping thousands of miles, capable but not capable'. In 2012, the founder purchased the trademark with a firm brand vision and invested heavily in it. The totem of the galloping horse in the logo corresponds to the word "CHI", symbolizing the spirit of racing people who win with speed and overcome difficulties with resilience.






■ 驰能商厨主要涉及的厨房设备有： COMMERCIAL KITCHEN PRODUCTS

电磁系列：电磁大小炒、电磁熬汤炉、电磁铁板烧、电磁煲仔炉等；
洗消系列：揭盖洗碗机、长龙洗碗机、超声波洗碗机、蒸汽消毒柜等；
蒸烤系列：海鲜蒸柜、蒸饭柜、高原蒸柜、万能蒸烤箱、烤鸭炉等；
自动化系列：自动炒菜机、自动升降煮面炉、自动升降炸炉、自动打饭机等；
制冷系列：晾鸭柜、牛肉熟成柜、冷藏冷冻柜、雪花冰机、速冻柜等；
面点加工系列：包子机、饺子机、面条机、和面机、压面机、醒发箱等；
食品机械系列：切菜机、绞肉切肉机、毛刷去皮机、瓜类削皮机等；
净化系列：油烟净化排放一体机、免烟罩内循环净化油烟机等；
配套服务：承接单位食堂、餐饮后厨、中央厨房等厨房工程建设、改造。

Electromagnetic series, Decontamination series, Steaming and baking series, Automation series, Refrigeration series, Pastry processing series, Food machinery series, Purification series

Supporting services: undertake the construction and renovation of kitchen projects such as unit canteens, catering kitchens, and central kitchens.

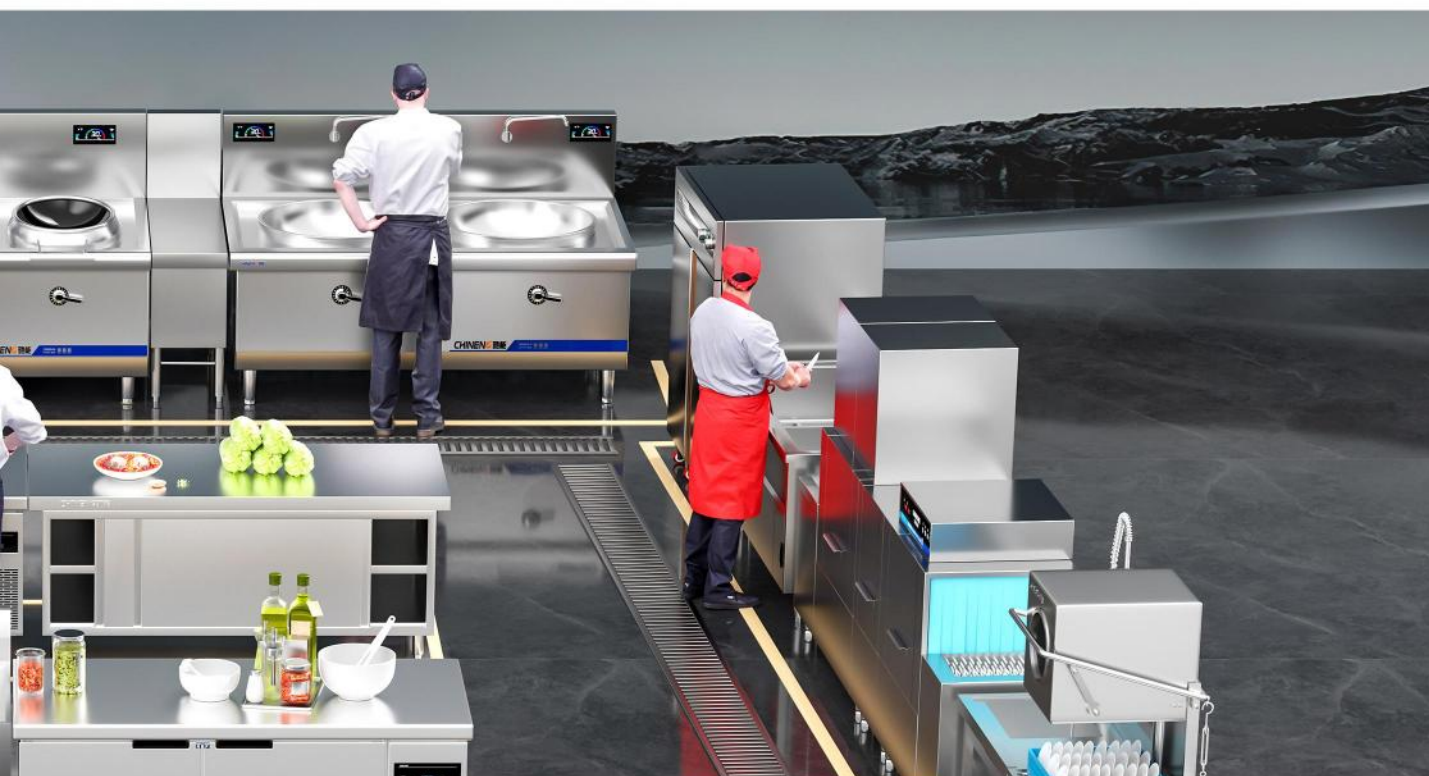

■ 他们都选择和驰能合作：
COOPERATIVE BRAND

 给您一个五星级的家				
				
				
				
				

产品目录

PRODUCT CATALOG

电磁系列
ELECTROMAGNETIC SERIES

洗消系列
WASHING AND DISINFECTION SERIES

蒸烤系列
STEAMING AND BAKING SERIES

自动化系列
AUTOMATION SERIES

制冷系列
REFRIGERATION SERIES

食品机械系列
FOOD MACHINERY SERIES

抽排系列
OIL SMOKE EXHAUST SERIES

商用厨房工程
COMMERCIAL KITCHEN ENGINEERING

CHINENG ELECTROMAGNETIC SERIES

驰能 | 电磁系列

大锅灶·小炒炉·熬汤炉·铁板烧·炸炉·煲仔炉·台式炉

BIG POT STOVE, SMALL STIR FRY STOVE, SOUP BOILING STOVE,
IRON PLATE ROAST, FRYING STOVE, BENCH STOVE



单头电磁大锅灶

Single-head electromagnetic large pot stove

- 进口安全耐用机芯
Imported safe and durable movement
- 加粗加密全铜线圈
Thickened and encrypted all-copper coil



标准款 Standard style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	锅径 Pot diameter(mm)
CN-DC-8164-D600	800*900*(800+400)	15KW/380V	φ600
CN-DC-8164-D700	900*1000*(800+400)	15KW/380V	φ700
CN-DC-8164-D800	1000*1100*(800+400)	20KW/380V	φ800
CN-DC-8164-D900	1100*1200*(800+400)	25KW/380V	φ900
CN-DC-8164-D1000	1200*1300*(800+400)	30KW/380V	φ1000
CN-DC-8164-D1200	1400*1500*(800+400)	30KW/380V	φ1200



荣耀款 Honor style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	锅径 Pot diameter(mm)
CN-DC-8164-D600-B	800*900*(800+400)	15KW/380V	φ600
CN-DC-8164-D700-B	900*1000*(800+400)	15KW/380V	φ700
CN-DC-8164-D800-B	1000*1100*(800+400)	20KW/380V	φ800
CN-DC-8164-D900-B	1100*1200*(800+400)	25KW/380V	φ900
CN-DC-8164-D1000-B	1200*1300*(800+400)	30KW/380V	φ1000
CN-DC-8164-D1200-B	1400*1500*(800+400)	30KW/380V	φ1200



豪华款 Luxurious style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	锅径 Pot diameter(mm)
CNH-RC-D600	800*900*(800+400)	12KW/380V	φ600
CNH-RC-D700	900*1000*(800+400)	15KW/380V	φ700
CNH-RC-D800	1000*1100*(800+400)	20KW/380V	φ800
CNH-RC-D900	1100*1200*(800+400)	25KW/380V	φ900
CNH-RC-D1000	1200*1300*(800+400)	30KW/380V	φ1000
CNH-RC-D1200	1400*1500*(800+400)	30KW/380V	φ1200



企业款 (304机身) Corporate style (304 body)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	锅径 Pot diameter(mm)
CN-8001-B304-D600	800*900*(800+400)	12KW/380V	φ600
CN-8001-B304-D700	900*1000*(800+400)	15KW/380V	φ700
CN-8001-B304-D800	1000*1100*(800+400)	20KW/380V	φ800
CN-8001-B304-D900	1100*1200*(800+400)	25KW/380V	φ900
CN-8001-B304-D1000	1200*1300*(800+400)	30KW/380V	φ1000
CN-8001-B304-D1200	1400*1500*(800+400)	30KW/380V	φ1200

单头电磁小炒炉

Single-head electromagnetic stir-frying stove

- 八档火力调节
Eight levels of firepower adjustment
- 防爆裂微晶面板
Anti-burst microcrystalline panel



创业款 6KW Startup Style 6KW

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	微晶面板 Panel
CN-JYXC-8125-300-6	850*800*(800+400)	6KW/220V	φ300
CN-JYXC-8125-400-6	900*800*(800+400)	6KW/220V	φ400



创业款 Startup Style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	微晶面板 Panel
CN-JYXC-8125-300-8	850*800*(800+400)	8KW/380V	φ300
CN-JYXC-8125-300-10	850*800*(800+400)	10KW/380V	φ300
CN-JYXC-8125-300-12	850*800*(800+400)	12KW/380V	φ300
CN-JYXC-8125-400-8	900*800*(800+400)	8KW/380V	φ400
CN-JYXC-8125-400-10	900*800*(800+400)	10KW/380V	φ400
CN-JYXC-8125-400-12	900*800*(800+400)	12KW/380V	φ400
CN-JYXC-8125-400-15	900*800*(800+400)	15KW/380V	φ400



连锁款 Chain style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	微晶面板 Panel
CN-XCL-8164-300-8	900*800*(800+400)	8KW/380V	φ300
CN-XCL-8164-300-10	900*800*(800+400)	10KW/380V	φ300
CN-XCL-8164-300-12	900*800*(800+400)	12KW/380V	φ300
CN-XCL-8164-400-12	1000*900*(800+400)	12KW/380V	φ400
CN-XCL-8164-400-15	1000*900*(800+400)	15KW/380V	φ400



企业款 Corporate style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	微晶面板 Panel
CN-XCL-8001-ZZ-400-8	1000*1100*(800+400)	8KW/380V	φ400
CN-XCL-8001-ZZ-400-12	1000*1100*(800+400)	12KW/380V	φ400
CN-XCL-8001-ZZ-400-15	1000*1100*(800+400)	15KW/380V	φ400

双头电磁大锅灶

Double-head electromagnetic large pot stove

- 进口安全耐用机芯
Imported safe and durable movement
- 加粗加密全铜线圈
Thickened and encrypted all-copper coil



荣耀款 Honor style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	锅径 Pot diameter(mm)
CN-DC-8164-D600-DD	1600*900*(800+400)	15KW*2/380V	φ600
CN-DC-8164-D700-DD	1700*1000*(800+400)	15KW*2/380V	φ700
CN-DC-8164-D800-DD	2000*1100*(800+400)	20KW*2/380V	φ800
CN-DC-8164-D900-DD	2200*1200*(800+400)	25KW*2/380V	φ900
CN-DC-8164-D1000-DD	2400*1300*(800+400)	30KW*2/380V	φ1000



豪华款 Luxurious style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	锅径 Pot diameter(mm)
CNH-RC-D602	1500*900*(800+400)	12KW*2/380V	φ600
CNH-RC-D702	1700*1000*(800+400)	15KW*2/380V	φ700
CNH-RC-D802	1900*1100*(800+400)	20KW*2/380V	φ800
CNH-RC-D902	2100*1200*(800+400)	25KW*2/380V	φ900
CNH-RC-D1002	2300*1300*(800+400)	30KW*2/380V	φ1000



至尊款 Supreme style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	锅径 Pot diameter(mm)
CN-RC-D602	1500*900*(800+400)	12KW*2/380V	φ600
CN-RC-D702	1700*1000*(800+400)	15KW*2/380V	φ700
CN-RC-D802	1900*1100*(800+400)	20KW*2/380V	φ800
CN-RC-D902	2100*1200*(800+400)	25KW*2/380V	φ900
CN-RC-D1002	2300*1300*(800+400)	30KW*2/380V	φ1000

至尊款 (304机身) Supreme style (304 body)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	锅径 Pot diameter(mm)
CN-RC-D602-304	1500*900*(800+400)	12KW*2/380V	φ600
CN-RC-D702-304	1700*1000*(800+400)	15KW*2/380V	φ700
CN-RC-D802-304	1900*1100*(800+400)	20KW*2/380V	φ800
CN-RC-D902-304	2100*1200*(800+400)	25KW*2/380V	φ900
CN-RC-D1002-304	2300*1300*(800+400)	30KW*2/380V	φ1000

双头电磁小炒炉

Double-head electromagnetic stir-frying stove

- 八档火力调节
Eight levels of firepower adjustment
- 防爆裂微晶面板
Anti-burst microcrystalline panel



创业款 Startup Style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	微晶面板 Panel
CN-JYXC-8125-300-8*2	1500*800*(800+400)	8KW*2/380V	φ300*2
CN-JYXC-8125-300-10*2	1500*800*(800+400)	10KW*2/380V	φ300*2
CN-JYXC-8125-300-12*2	1500*800*(800+400)	12KW*2/380V	φ300*2
CN-JYXC-8125-400-12*2	1500*800*(800+400)	12KW*2/380V	φ400*2
CN-JYXC-8125-400-15*2	1500*800*(800+400)	15KW*2/380V	φ400*2



连锁款 Chain style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	微晶面板 Panel
CN-XCL-8164-300-8*2	1500*800*(800+400)	8KW*2/380V	φ300*2
CN-XCL-8164-300-10*2	1500*800*(800+400)	10KW*2/380V	φ300*2
CN-XCL-8164-300-12*2	1500*800*(800+400)	12KW*2/380V	φ300*2
CN-XCL-8164-400-12*2	1500*900*(800+400)	12KW*2/380V	φ400*2
CN-XCL-8164-400-15*2	1500*900*(800+400)	15KW*2/380V	φ400*2



企业款 Corporate style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	微晶面板 Panel
CN-XCL-8001-ZZ-400-8*2	1800*1100*(800+400)	8KW*2/380V	φ400*2
CN-XCL-8001-ZZ-400-12*2	1800*1000*(800+400)	12KW*2/380V	φ400*2
CN-XCL-8001-ZZ-400-15*2	1800*1100*(800+400)	15KW*2/380V	φ400*2



企业款 Corporate style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	微晶面板 Panel
CN-XCL-8001-ZZ-400-8*2-SW	2000*1100*(800+400)	8KW*2/380V	φ400*2
CN-XCL-8001-ZZ-400-12*2-SW	2000*1100*(800+400)	12KW*2/380V	φ400*2
CN-XCL-8001-ZZ-400-15*2-SW	2000*1100*(800+400)	15KW*2/380V	φ400*2

大小炒双头电磁组合炉

Large and small stir-frying electromagnetic combination stove

- 进口安全耐用机芯
Imported safe and durable movement
- 加粗加密全铜线圈
Thick encrypted full copper coil

荣耀款 Honor style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	锅径 Pot diameter(mm)
CN-DXC-8164-D600	1600*900*(800+400)	15KW+12KW/380V	Φ400+Φ600
CN-DXC-8164-D700	1700*1000*(800+400)	15KW+15KW/380V	Φ400+Φ700
CN-DXC-8164-D800	1800*1100*(800+400)	15KW+20KW/380V	Φ400+Φ800
CN-DXC-8164-D900	2000*1200*(800+400)	15KW+25KW/380V	Φ400+Φ900
CN-DXC-8164-D1000	2100*1300*(800+400)	15KW+30KW/380V	Φ400+Φ1000

豪华款 Luxurious style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	锅径 Pot diameter(mm)
CN-RC-HXCDC-1	1800*900*(800+400)	15KW+12KW/380V	Φ400+Φ600
CN-RC-HXCDC-2	1900*1000*(800+400)	15KW+15KW/380V	Φ400+Φ700
CN-RC-HXCDC-3	2000*1100*(800+400)	15KW+20KW/380V	Φ400+Φ800
CN-RC-HXCDC-4	2100*1200*(800+400)	15KW+25KW/380V	Φ400+Φ900
CN-RC-HXCDC-5	2200*1300*(800+400)	15KW+30KW/380V	Φ400+Φ1000

至尊款 Supreme style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	锅径 Pot diameter(mm)
CRC-XCDC-1	1800*900*(800+400)	15KW+12KW/380V	Φ400+Φ600
CRC-XCDC-2	1900*1000*(800+400)	15KW+15KW/380V	Φ400+Φ700
CRC-XCDC-3	2000*1100*(800+400)	15KW+20KW/380V	Φ400+Φ800
CRC-XCDC-4	2100*1200*(800+400)	15KW+25KW/380V	Φ400+Φ900
CRC-XCDC-5	2200*1300*(800+400)	15KW+30KW/380V	Φ400+Φ1000

至尊款 (304机身) Supreme style (304 body)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	锅径 Pot diameter(mm)
CRC-XCDC-1-304	1800*900*(800+400)	15KW+12KW/380V	Φ400+Φ600
CRC-XCDC-2-304	1900*1000*(800+400)	15KW+15KW/380V	Φ400+Φ700
CRC-XCDC-3-304	2000*1100*(800+400)	15KW+20KW/380V	Φ400+Φ800
CRC-XCDC-4-304	2100*1200*(800+400)	15KW+25KW/380V	Φ400+Φ900
CRC-XCDC-5-304	2200*1300*(800+400)	15KW+30KW/380V	Φ400+Φ1000

电磁低汤炉

Electromagnetic low-soup stove

- 八档火力调节
Eight levels of firepower adjustment
- 防爆裂微晶面板
Anti-burst microcrystalline panel



/ 创业款 6KW 单眼
/ Startup style 6KW single eye



/ 创业款 6KW 双眼
/ Startup style 6KW double eye

Startup style 6KW single eye

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	微晶面板 Panel
CN-DTL-8125-430-6	600*730*(450+750)	6KW/220V	Φ430

Startup style 6KW double eye

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	微晶面板 Panel
CN-DTL-8125-430-6*2	1300*730*(450+750)	6KW*2/220V	Φ430*2



/ 创业款 单眼
/ Startup style single eye



/ 创业款 双眼
/ Startup style double eye

Startup style single eye

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	微晶面板 Panel
CN-DTL-8164-430-8	650*750*(500+750)	8KW/380V	Φ430
CN-DTL-8164-430-12	650*750*(500+750)	12KW/380V	Φ430
CN-DTL-8164-430-15	650*750*(500+750)	15KW/380V	Φ430

Startup style double eye

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	微晶面板 Panel
CN-DTL-8164-430-8*2	1300*750*(500+700)	8KW*2/380V	Φ430*2
CN-DTL-8164-430-12*2	1300*750*(500+700)	12KW*2/380V	Φ430*2
CN-DTL-8164-430-15*2	1300*750*(500+700)	15KW*2/380V	Φ430*2



豪华款 单眼
/ Luxurious style single eye



豪华款 双眼
/ Luxurious style double eye

Luxurious style single eye

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	微晶面板 Panel
CRC-BT430-8Y	650*750*(500+700)	8KW/380V	Φ430
CRC-BT430-12Y	650*750*(500+700)	12KW/380V	Φ430
CRC-BT430-15Y	650*750*(500+700)	15KW/380V	Φ430

Luxurious style double eye

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	微晶面板 Panel
CRC-SBT430-8Y	1300*750*(500+700)	8KW*2/220V	Φ430*2
CRC-SBT430-12Y	1300*750*(500+700)	12KW*2/380V	Φ430*2
CRC-SBT430-15Y	1300*750*(500+700)	15KW*2/380V	Φ430*2



企业款 单眼
/ Corporate style single eye



企业款 双眼
/ Corporate style double eye

企业款 单眼 (304机身) Corporate style single eye (304 body)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	微晶面板 Panel
CN-8001-B304-BT430-8Y	650*750*(500+700)	8KW/380V	Φ430
CN-8001-B304-BT430-12Y	650*750*(500+700)	12KW/380V	Φ430
CN-8001-B304-BT430-15Y	650*750*(500+700)	15KW/380V	Φ430

企业款 双眼 (304机身) Corporate style double eye (304 body)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	微晶面板 Panel
CN-8001-B304-SBT430-8Y	1300*750*(500+700)	8KW*2/380V	Φ430*2
CN-8001-B304-SBT430-12Y	1300*750*(500+700)	12KW*2/380V	Φ430*2
CN-8001-B304-SBT430-15Y	1300*750*(500+700)	15KW*2/380V	Φ430*2

牛羊肉电磁汤锅

Beef and mutton electromagnetic soup pot

- 进口安全耐用机芯
Imported safe and durable movement
- 八档磁控开关
Eight-position magnetic control switch



复合底 304锅 Composite base 304 pot

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	锅径 Pot diameter(mm)
CRC-D600-1	800*900*(800+400)	12KW/380V	φ600
CRC-D700-1	900*1000*(800+400)	15KW/380V	φ700
CRC-D800-1	1000*1100*(800+400)	20KW/380V	φ800
CRC-D900-1	1100*1200*(800+400)	25KW/380V	φ900
CRC-D1000-1	1200*1300*(800+400)	30KW/380V	φ1000



复合底 304锅（无背板） Composite base 304 pot (No back plate)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	锅径 Pot diameter(mm)
CN-8164-D600-304	800*900*800	12KW/380V	φ600
CN-8164-D700-304	900*1000*800	15KW/380V	φ700
CN-8164-D800-304	1000*1100*800	20KW/380V	φ800
CN-8164-D900-304	1100*1200*800	25KW/380V	φ900
CN-8164-D1000-304	1200*1300*800	30KW/380V	φ1000



443锅 433 Pot

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	锅径 Pot diameter(mm)
CN-DC-8164-D600-443	800*900*(800+400)	12KW/380V	φ600
CN-DC-8164-D700-443	900*1000*(800+400)	15KW/380V	φ700
CN-DC-8164-D800-443	1000*1100*(800+400)	20KW/380V	φ800
CN-DC-8164-D900-443	1100*1200*(800+400)	25KW/380V	φ900
CN-DC-8164-D1000-443	1200*1300*(800+400)	30KW/380V	φ1000



443锅（喇叭口加高） 443 Pot (Flared)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	锅径 Pot diameter(mm)
CN-DC-8164-D600-443-2	800*900*(800+400)	12KW/380V	φ600
CN-DC-8164-D700-443-2	900*1000*(800+400)	15KW/380V	φ700
CN-DC-8164-D800-443-2	1000*1100*(800+400)	20KW/380V	φ800
CN-DC-8164-D900-443-2	1100*1200*(800+400)	25KW/380V	φ900
CN-DC-8164-D1000-443-2	1200*1300*(800+400)	30KW/380V	φ1000

一体式电磁汤锅

Integrated electromagnetic soup pot

- 双层加高汤锅
Double-layer elevated soup pot
- 8档磁控火力调节
8-speed magnetic control firepower adjustment



409锅 409 Pot

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	锅径 Pot diameter(mm)
CN-8164-YT600-409	800*900*800	12KW/380V	φ600
CN-8164-YT700-409	900*1000*800	15KW/380V	φ700
CN-8164-YT800-409	1000*1100*800	20KW/380V	φ800
CN-8164-YT900-409	1100*1200*800	25KW/380V	φ900
CN-8164-YT1000-409	1200*1300*800	30KW/380V	φ1000

复合底 304锅 Composite base 304 Pot

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	锅径 Pot diameter(mm)
CN-8164-YT600-FHD	800*900*800	12KW/380V	φ600
CN-8164-YT700-FHD	900*1000*800	15KW/380V	φ700
CN-8164-YT800-FHD	1000*1100*800	20KW/380V	φ800
CN-8164-YT900-FHD	1100*1200*800	25KW/380V	φ900
CN-8164-YT1000-FHD	1200*1300*800	30KW/380V	φ1000

可倾式电磁熬汤炉

Tilting electromagnetic soup cooker

- 394L超大容量
394L super large capacity
- 8档磁控火力调节
8-speed magnetic control firepower adjustment



430锅 430 Pot

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	锅径 Pot diameter(mm)
CRC-QBT700	1250*1000*1050	15KW/380V	φ700
CRC-QBT800	1350*1000*1050	20KW/380V	φ800
CRC-QBT900	1450*1000*1050	25KW/380V	φ900
CRC-QBT1000	1550*1000*1050	30KW/380V	φ1000
CRC-QBT1200	1750*1300*1050	30KW/380V	φ1200

430锅 (304机身) 430 Pot (304 body)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	锅径 Pot diameter(mm)
CRC-QBT700-FB304	1250*1000*1050	15KW/380V	φ700
CRC-QBT800-FB304	1350*1000*1050	20KW/380V	φ800
CRC-QBT900-FB304	1450*1000*1050	25KW/380V	φ900
CRC-QBT1000-FB304	1550*1000*1050	30KW/380V	φ1000
CRC-QBT1200-FB304	1750*1300*1050	30KW/380V	φ1200

立式铁板烧

Vertical teppanyaki

- 8KW大功率
8KW high power
- 形状/尺寸定制
Shape / size customization



连锁电热款 Chain electric heating model

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	形状 Shape
CN-TBS-LS-DR-800	800*800*800	8KW/380V	长方形 Rectangle
CN-TBS-LS-DR-1000	1000*800*800	8KW/380V	长方形 Rectangle
CN-TBS-LS-DR-1200	1200*800*800	8KW/380V	长方形 Rectangle
CN-TBS-LS-DR-1500	1500*800*800	8KW/380V	长方形 Rectangle
CN-TBS-LS-DR-1800	1800*800*800	8KW/380V	长方形 Rectangle
CN-TBS-LS-DR-2000	2000*800*800	8KW/380V	长方形 Rectangle




连锁电磁款 Chain electromagnetic model

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	形状 Shape
CN-TBS-LS-DC-800	800*800*800	8KW/380V	长方形 Rectangle
CN-TBS-LS-DC-1000	1000*800*800	8KW/380V	长方形 Rectangle
CN-TBS-LS-DC-1200	1200*800*800	8KW/380V	长方形 Rectangle
CN-TBS-LS-DC-1500	1500*800*800	8KW/380V	长方形 Rectangle
CN-TBS-LS-DC-1800	1800*800*800	8KW/380V	长方形 Rectangle
CN-TBS-LS-DC-2000	2000*800*800	8KW/380V	长方形 Rectangle



豪华电热款 Luxury electric heating model

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	形状 Shape
CN-CL-HDR5	800*800*800	8KW/380V	长方形 Rectangle
CN-CL-HDR6	1000*800*800	8KW/380V	长方形 Rectangle
CN-HDR1	1200*800*800	8KW/380V	长方形 Rectangle
CN-HDR2	1500*800*800	8KW/380V	长方形 Rectangle
CN-HDR3	1800*800*800	8KW/380V	长方形 Rectangle
CN-HDR4	2000*800*800	8KW/380V	长方形 Rectangle

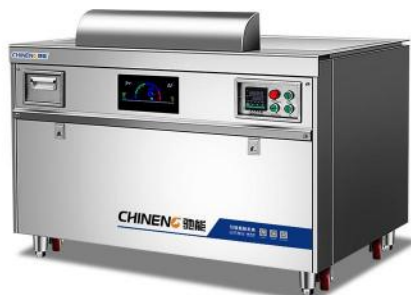

豪华电磁款 Luxury electromagnetic model

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	形状 Shape
CN-CL-HDC5	800*800*800	8KW/380V	长方形 Rectangle
CN-CL-HDC6	1000*800*800	8KW/380V	长方形 Rectangle
CN-HDC1	1200*800*800	8KW/380V	长方形 Rectangle
CN-HDC2	1500*800*800	8KW/380V	长方形 Rectangle
CN-HDC3	1800*800*800	8KW/380V	长方形 Rectangle
CN-HDC4	2000*800*800	8KW/380V	长方形 Rectangle

商用电磁煲仔炉

Commercial electromagnetic rice cooker

- 进口安全耐用机芯
Imported safe and durable movement
- 加粗加密全铜线圈
Thickened and encrypted all-copper coil



创业款 台式 Startup style desktop

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	款式 Style	微晶面板 Panel
CN-BZL-8125-2.5*2-T3	340*780*220	2500W*2/220V	二头竖排 Two heads are arranged vertically	Φ288mm
CN-BZL-8125-3*2-T3	340*780*220	3000W*2/220V	二头竖排 Two heads are arranged vertically	Φ288mm
CN-BZL-8125-2.5*2-T1	680*440*220	2500W*2/220V	二头横排 The two ends are lined up horizontally	Φ288mm
CN-BZL-8125-3*2-T1	680*440*220	3000W*2/220V	二头横排 The two ends are lined up horizontally	Φ288mm
CN-BZL-8125-2.5*3-T1	1020*440*220	2500W*3/380V	三头横排 Three heads lined up horizontally	Φ288mm
CN-BZL-8125-3*3-T1	1020*440*220	3000W*3/380V	三头横排 Three heads lined up horizontally	Φ288mm
CN-BZL-8125-2.5*4-T1	1360*440*220	2500W*4/380V	四头横排 Four heads are lined up horizontally	Φ288mm
CN-BZL-8125-3*4-T1	1360*440*220	3000W*4/380V	四头横排 Four heads are lined up horizontally	Φ288mm
CN-BZL-8125-2.5*4-T3	680*780*220	2500W*4/380V	四头双排 Four heads in double rows	Φ288mm
CN-BZL-8125-3*4-T3	680*780*220	3000W*4/380V	四头双排 Four heads in double rows	Φ288mm
CN-BZL-8125-2.5*6-T1	1020*780*220	2500W*6/380V	六头双排 Six heads in double rows	Φ288mm
CN-BZL-8125-3*6-T1	1020*780*220	3000W*6/380V	六头双排 Six heads in double rows	Φ288mm
CN-BZL-8125-2.5*8-T1	1360*780*220	2500W*8/380V	八头双排 Eight heads in double rows	Φ288mm
CN-BZL-8125-3*8-T1	1360*780*220	3000W*8/380V	八头双排 Eight heads in double rows	Φ288mm

连锁款 台式 Chain style desktop

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	款式 Style	微晶面板 Panel
CN-BZL-8125-3*2-T4	340*780*220	3000W*2/220V	二头竖排 Two heads are arranged vertically	Φ288mm
CN-BZL-8125-3.5*2-T4	340*780*220	3500W*2/220V	二头竖排 Two heads are arranged vertically	Φ288mm
CN-BZL-8125-3*2-T2	680*440*220	3000W*2/220V	二头横排 The two ends are lined up horizontally	Φ288mm
CN-BZL-8125-3.5*2-T2	680*440*220	3500W*2/220V	二头横排 The two ends are lined up horizontally	Φ288mm
CN-BZL-8125-3*3-T2	1020*440*220	3000W*3/380V	三头横排 Three heads lined up horizontally	Φ288mm
CN-BZL-8125-3.5*3-T2	1020*440*220	3500W*3/380V	三头横排 Three heads lined up horizontally	Φ288mm
CN-BZL-8125-3*4-T4	1360*440*220	3000W*4/380V	四头横排 Four heads are lined up horizontally	Φ288mm
CN-BZL-8125-3.5*4-T4	1360*440*220	3500W*4/380V	四头横排 Four heads are lined up horizontally	Φ288mm
CN-BZL-8125-3*4-T2	680*780*220	3000W*4/380V	四头双排 Four heads in double rows	Φ288mm
CN-BZL-8125-3.5*4-T2	680*780*220	3500W*4/380V	四头双排 Four heads in double rows	Φ288mm
CN-BZL-8125-3*6-T2	1020*780*220	3000W*6/380V	六头双排 Six heads in double rows	Φ288mm
CN-BZL-8125-3.5*6-T2	1020*780*220	3500W*6/380V	六头双排 Six heads in double rows	Φ288mm
CN-BZL-8125-3*8-T2	1360*780*220	3000W*8/380V	八头双排 Eight heads in double rows	Φ288mm
CN-BZL-8125-3.5*8-T2	1360*780*220	3500W*8/380V	八头双排 Eight heads in double rows	Φ288mm



创业款 立式 Startup style vertical

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	款式 Style	微晶面板 Panel
CN-BZL-8125-2.5*2-L3	340*780*800	2500W*2/220V	二头竖排 Two heads are arranged vertically	Φ288mm
CN-BZL-8125-3*2-L3	340*780*800	3000W*2/220V	二头竖排 Two heads are arranged vertically	Φ288mm
CN-BZL-8125-2.5*2-L1	680*440*800	2500W*2/220V	二头横排 The two ends are lined up horizontally	Φ288mm
CN-BZL-8125-3*2-L1	680*440*800	3000W*2/220V	二头横排 The two ends are lined up horizontally	Φ288mm
CN-BZL-8125-2.5*3-L1	1020*440*800	2500W*3/380V	三头横排 Three heads lined up horizontally	Φ288mm
CN-BZL-8125-3*3-L1	1020*440*800	3000W*3/380V	三头横排 Three heads lined up horizontally	Φ288mm
CN-BZL-8125-2.5*4-L1	1360*440*800	2500W*4/380V	四头横排 Four heads are lined up horizontally	Φ288mm
CN-BZL-8125-3*4-L1	1360*440*800	3000W*4/380V	四头横排 Four heads are lined up horizontally	Φ288mm
CN-BZL-8125-2.5*4-L3	680*780*800	2500W*4/380V	四头双排 Four heads in double rows	Φ288mm
CN-BZL-8125-3*4-L3	680*780*800	3000W*4/380V	四头双排 Four heads in double rows	Φ288mm
CN-BZL-8125-2.5*6-L1	1020*780*800	2500W*6/380V	六头双排 Six heads in double rows	Φ288mm
CN-BZL-8125-3*6-L1	1020*780*800	3000W*6/380V	六头双排 Six heads in double rows	Φ288mm
CN-BZL-8125-2.5*8-L1	1360*780*800	2500W*8/380V	八头双排 Eight heads in double rows	Φ288mm
CN-BZL-8125-3*8-L1	1360*780*800	3000W*8/380V	八头双排 Eight heads in double rows	Φ288mm

连锁款 立式 Chain style vertical

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	款式 Style	微晶面板 Panel
CN-BZL-8125-3*2-L4	340*780*800	3000W*2/220V	二头竖排 Two heads are arranged vertically	Φ288mm
CN-BZL-8125-3.5*2-L4	340*780*800	3500W*2/220V	二头竖排 Two heads are arranged vertically	Φ288mm
CN-BZL-8125-3*2-L2	680*440*800	3000W*2/220V	二头横排 The two ends are lined up horizontally	Φ288mm
CN-BZL-8125-3.5*2-L2	680*440*800	3500W*2/220V	二头横排 The two ends are lined up horizontally	Φ288mm
CN-BZL-8125-3*3-L2	1020*440*800	3000W*3/380V	三头横排 Three heads lined up horizontally	Φ288mm
CN-BZL-8125-3.5*3-L2	1020*440*800	3500W*3/380V	三头横排 Three heads lined up horizontally	Φ288mm
CN-BZL-8125-3*4-L4	1360*440*800	3000W*4/380V	四头横排 Four heads are lined up horizontally	Φ288mm
CN-BZL-8125-3.5*4-L4	1360*440*800	3500W*4/380V	四头横排 Four heads are lined up horizontally	Φ288mm
CN-BZL-8125-3*4-L2	680*780*800	3000W*4/380V	四头双排 Four heads in double rows	Φ288mm
CN-BZL-8125-3.5*4-L2	680*780*800	3500W*4/380V	四头双排 Four heads in double rows	Φ288mm
CN-BZL-8125-3*6-L2	1020*780*800	3000W*6/380V	六头双排 Six heads in double rows	Φ288mm
CN-BZL-8125-3.5*6-L2	1020*780*800	3500W*6/380V	六头双排 Six heads in double rows	Φ288mm
CN-BZL-8125-3*8-L2	1360*780*800	3000W*8/380V	八头双排 Eight heads in double rows	Φ288mm
CN-BZL-8125-3.5*8-L2	1360*780*800	3500W*8/380V	八头双排 Eight heads in double rows	Φ288mm



创业款 柜式 Startup style cabinet type

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	款式 Style	微晶面板 Panel
CN-BZL-8125-2.5*2-G3	340*780*(800+120)	2500W*2/220V	二头竖排 Two heads are arranged vertically	Φ288mm
CN-BZL-8125-3*2-G3	340*780*(800+120)	3000W*2/220V	二头竖排 Two heads are arranged vertically	Φ288mm
CN-BZL-8125-2.5*2-G1	680*440*(800+120)	2500W*2/220V	二头横排 The two ends are lined up horizontally	Φ288mm
CN-BZL-8125-3*2-G1	680*440*(800+120)	3000W*2/220V	二头横排 The two ends are lined up horizontally	Φ288mm
CN-BZL-8125-2.5*3-G1	1020*440*(800+120)	2500W*3/380V	三头横排 Three heads lined up horizontally	Φ288mm
CN-BZL-8125-3*3-G1	1020*440*(800+120)	3000W*3/380V	三头横排 Three heads lined up horizontally	Φ288mm
CN-BZL-8125-2.5*4-G1	1360*440*(800+120)	2500W*4/380V	四头横排 Four heads are lined up horizontally	Φ288mm
CN-BZL-8125-3*4-G1	1360*440*(800+120)	3000W*4/380V	四头横排 Four heads are lined up horizontally	Φ288mm
CN-BZL-8125-2.5*4-G3	680*780*(800+120)	2500W*4/380V	四头双排 Four heads in double rows	Φ288mm
CN-BZL-8125-3*4-G3	680*780*(800+120)	3000W*4/380V	四头双排 Four heads in double rows	Φ288mm
CN-BZL-8125-2.5*6-G1	1020*780*(800+120)	2500W*6/380V	六头双排 Six heads in double rows	Φ288mm
CN-BZL-8125-3*6-G1	1020*780*(800+120)	3000W*6/380V	六头双排 Six heads in double rows	Φ288mm
CN-BZL-8125-2.5*8-G1	1360*780*(800+120)	2500W*8/380V	八头双排 Eight heads in double rows	Φ288mm
CN-BZL-8125-3*8-G1	1360*780*(800+120)	3000W*8/380V	八头双排 Eight heads in double rows	Φ288mm

连锁款 柜式 Chain style cabinet type

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	款式 Style	微晶面板 Panel
CN-BZL-8125-3*2-G4	340*780*(800+120)	3000W*2/220V	二头竖排 Two heads are arranged vertically	Φ288mm
CN-BZL-8125-3.5*2-G4	340*780*(800+120)	3500W*2/220V	二头竖排 Two heads are arranged vertically	Φ288mm
CN-BZL-8125-3*2-G2	680*440*(800+120)	3000W*2/220V	二头横排 The two ends are lined up horizontally	Φ288mm
CN-BZL-8125-3.5*2-G2	680*440*(800+120)	3500W*2/220V	二头横排 The two ends are lined up horizontally	Φ288mm
CN-BZL-8125-3*3-G2	1020*440*(800+120)	3000W*3/380V	三头横排 Three heads lined up horizontally	Φ288mm
CN-BZL-8125-3.5*3-G2	1020*440*(800+120)	3500W*3/380V	三头横排 Three heads lined up horizontally	Φ288mm
CN-BZL-8125-3*4-G4	1360*440*(800+120)	3000W*4/380V	四头横排 Four heads are lined up horizontally	Φ288mm
CN-BZL-8125-3.5*4-G4	1360*440*(800+120)	3500W*4/380V	四头横排 Four heads are lined up horizontally	Φ288mm
CN-BZL-8125-3*4-G2	680*780*(800+120)	3000W*4/380V	四头双排 Four heads in double rows	Φ288mm
CN-BZL-8125-3.5*4-G2	680*780*(800+120)	3500W*4/380V	四头双排 Four heads in double rows	Φ288mm
CN-BZL-8125-3*6-G2	1020*780*(800+120)	3000W*6/380V	六头双排 Six heads in double rows	Φ288mm
CN-BZL-8125-3.5*6-G2	1020*780*(800+120)	3500W*6/380V	六头双排 Six heads in double rows	Φ288mm
CN-BZL-8125-3*8-G2	1360*780*(800+120)	3000W*8/380V	八头双排 Eight heads in double rows	Φ288mm
CN-BZL-8125-3.5*8-G2	1360*780*(800+120)	3500W*8/380V	八头双排 Eight heads in double rows	Φ288mm

煲仔炉+熬汤组合炉

Baozi stove+Soup-making combination stove

- 一机多用
One machine with multiple uses
- 大功率快速加热
High-power rapid heating



双头组合
Two-head combination



四头组合
Four-head combination



六头组合
Six-headed combination

	双头组合 Double-head combination	四头组合 Four-head combination	六头组合 Six-headed combination
型号 Model	CN-8125-BZTL-2	CN-8125-BZTL-4	CN-8125-BZTL-6
尺寸 Size(mm)	450*800*(800+120)	800*800*(800+120)	1200*800*(800+120)
功率/电压 Power/Voltage	3500W*2/220V	3500W*4/380V	3500W*6/380V
微晶面板 Panel	300*300mm	300*300mm	300*300mm
汤桶直径 Soup barrel diameter	300mm	300mm	300mm
规格 Specification	煲仔炉*1 + 熬汤炉*1 1 rice cooker + 1 soup cooker	煲仔炉*2 + 熬汤炉*2 2 rice cooker + 2 soup cooker	煲仔炉*3 + 熬汤炉*3 3 rice cooker + 3 soup cooker



小炒炉+调料台 Stir-frying stove + Seasoning counter

型号 Model	CN-8125-STXC-TLT
尺寸 Size(mm)	450*800*(800+120)
功率/电压 Power/Voltage	3500W*3/380V
微晶面板 Panel	280*280mm
调料台 Seasoning counter	1/6份数盆 (10cm深) 1/6 of a pot (10cm deep)
规格 Specification	小炒炉*3 + 调料台*10 3 small stir-frying grills + 10 seasoning counters

3500W台式电磁炉

3500W desktop induction cooker

- 进口安全耐用机芯
Imported safe and durable movement
- 防爆裂微晶面板
Anti-burst microcrystalline panel



/ 豪华款
/ Luxurious style



/ 豪华款
/ Luxurious style



/ 旗舰款
/ Flagship style



/ 旗舰款
/ Flagship style

	豪华款 Luxurious style	豪华款 Luxurious style	旗舰款 Flagship style	旗舰款 Flagship style
型号 Model	CN-8117-35-CP	CN-8117-35-CA	CN-8117-35-DP	CN-8117-35-DA
尺寸 Size(mm)	350*425*140	350*425*145	355*430*145	355*430*145
功率/电压 Power/Voltage	3500W/220V	3500W/220V	3500W/220V	3500W/220V
微晶面板 Panel	300*300mm	φ280mm	300*300mm	φ280mm
面板类型 Panel type	平炉 Flat surface furnace	凹炉 Concave furnace	平炉 Flat surface furnace	凹炉 Concave furnace

5000W台式电磁炉

5000W desktop induction cooker

- 进口安全耐用机芯
Imported safe and durable movement
- 防爆裂微晶面板
Anti-burst microcrystalline panel



/ 磁控款
/ Magnetic control style



/ 磁控款
/ Magnetic control style



/ 旋钮款
/ Knob style



/ 旋钮款
/ Knob style

	磁控款 Magnetic control style	磁控款 Magnetic control style	旋钮款 Knob style	旋钮款 Knob style
型号 Model	CN-SL-50-CP1	CN-SL-50-CA1-02	CRC-5030P	CRC-523A
尺寸 Size(mm)	405*510*200	405*510*220	400*470*200	400*435*195
功率/电压 Power/Voltage	5000W/220V	5000W/220V	5000W/380V	5000W/380V
微晶面板 Panel	300*300mm	φ300mm	300*300mm	φ300mm
面板类型 Panel type	平炉 Flat surface furnace	凹炉 Concave furnace	平炉 Flat surface furnace	凹炉 Concave furnace

8000W商用电磁炉

8000W commercial induction cooker

- 进口安全耐用机芯
Imported safe and durable movement
- 防爆裂微晶面板
Anti-burst microcrystalline panel



/ 台式款
/ Desktop style



/ 台式款
/ Desktop style

台式款 Desktop style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	面板类型 Panel type	微晶面板 Panel
CN-8125-TPC400-8	530*555*290	8000W/380V	平炉 Flat surface furnace	400*400mm
CN-8125-TAC400-8	530*555*305	8000W/380V	凹炉 Concave furnace	φ400mm



/ 立式款
/ Vertical style



/ 立式款
/ Vertical style

立式款 Vertical style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	面板类型 Panel type	微晶面板 Panel
CN-8125-LPC400-8	530*555*800	8000W/380V	平炉 Flat surface furnace	400*400mm
CN-8125-LAC400-8	530*555*800	8000W/380V	凹炉 Concave furnace	φ400mm

煮面炉配套设备

Supporting equipment for noodle cooking stoves

- 搭配煮面炉使用
Use it in conjunction with a noodle cooker
- 全不锈钢，易清洁
All stainless steel, easy to clean



/ 4格保温台+7格调料台

/ 4-compartment insulation table + 7-compartment material table



/ 单头熬汤炉

/ Single-head soup cooker

4格保温台+7格调料台 4-compartment insulation table + 7-compartment material table

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	保温台 Insulation table	调料台 Seasoning counter
CN-8125-BWT-TLT-750	800*750*1179	2.5KW/220V	1/3份数盆 (15cm深) 1/3 serving bowl (15cm deep)	1/9份数盆 (15cm深) 1/9 of a pot (15cm deep)
CN-8125-BWT-TLT-875	800*875*1179	2.5KW/220V	1/3份数盆 (15cm深) 1/3 serving bowl (15cm deep)	1/9份数盆 (15cm深) 1/9 of a pot (15cm deep)

单头熬汤炉 Single-head soup cooker

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	汤桶 Soup bucket	汤桶直径 Soup Bucket Diameter
CN-8125-DTTL-35-750	500*750*800	5KW/220V	1	350mm
CN-8125-DTTL-40-750	500*750*800	5KW/220V	1	400mm



/ 双头横排熬汤炉

/ Double-head horizontal row soup-making stove



/ 双头竖排熬汤炉

/ Double-head vertical row soup cooker

双头横排熬汤炉 Double-head horizontal row soup-making stove

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	汤桶 Soup bucket	汤桶直径 Soup Bucket Diameter
CN-8125-HPTL-35-750	850*750*800	5KW*2/220V	2	350mm
CN-8125-HPTL-35-875	850*875*800	5KW*2/220V	2	350mm

双头竖排熬汤炉 Double-head vertical row soup-making stove


型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	汤桶 Soup bucket	汤桶直径 Soup Bucket Diameter
CN-8125-SPTL-30-750	500*750*800	3.5KW*2/220V	2	300mm
CN-8125-SPTL-35-850	500*850*800	5KW*2/220V	2	350mm

CHINENG WASHING AND DISINFECTION SERIES

驰能 | 洗消系列

揭盖式洗碗机 · 长龙洗碗机 · 超声波洗碗机 · 商用消毒柜

COMMERCIAL DISHWASHERS, ULTRASONIC DISHWASHERS,
COMMERCIAL DISINFECTION CABINETS

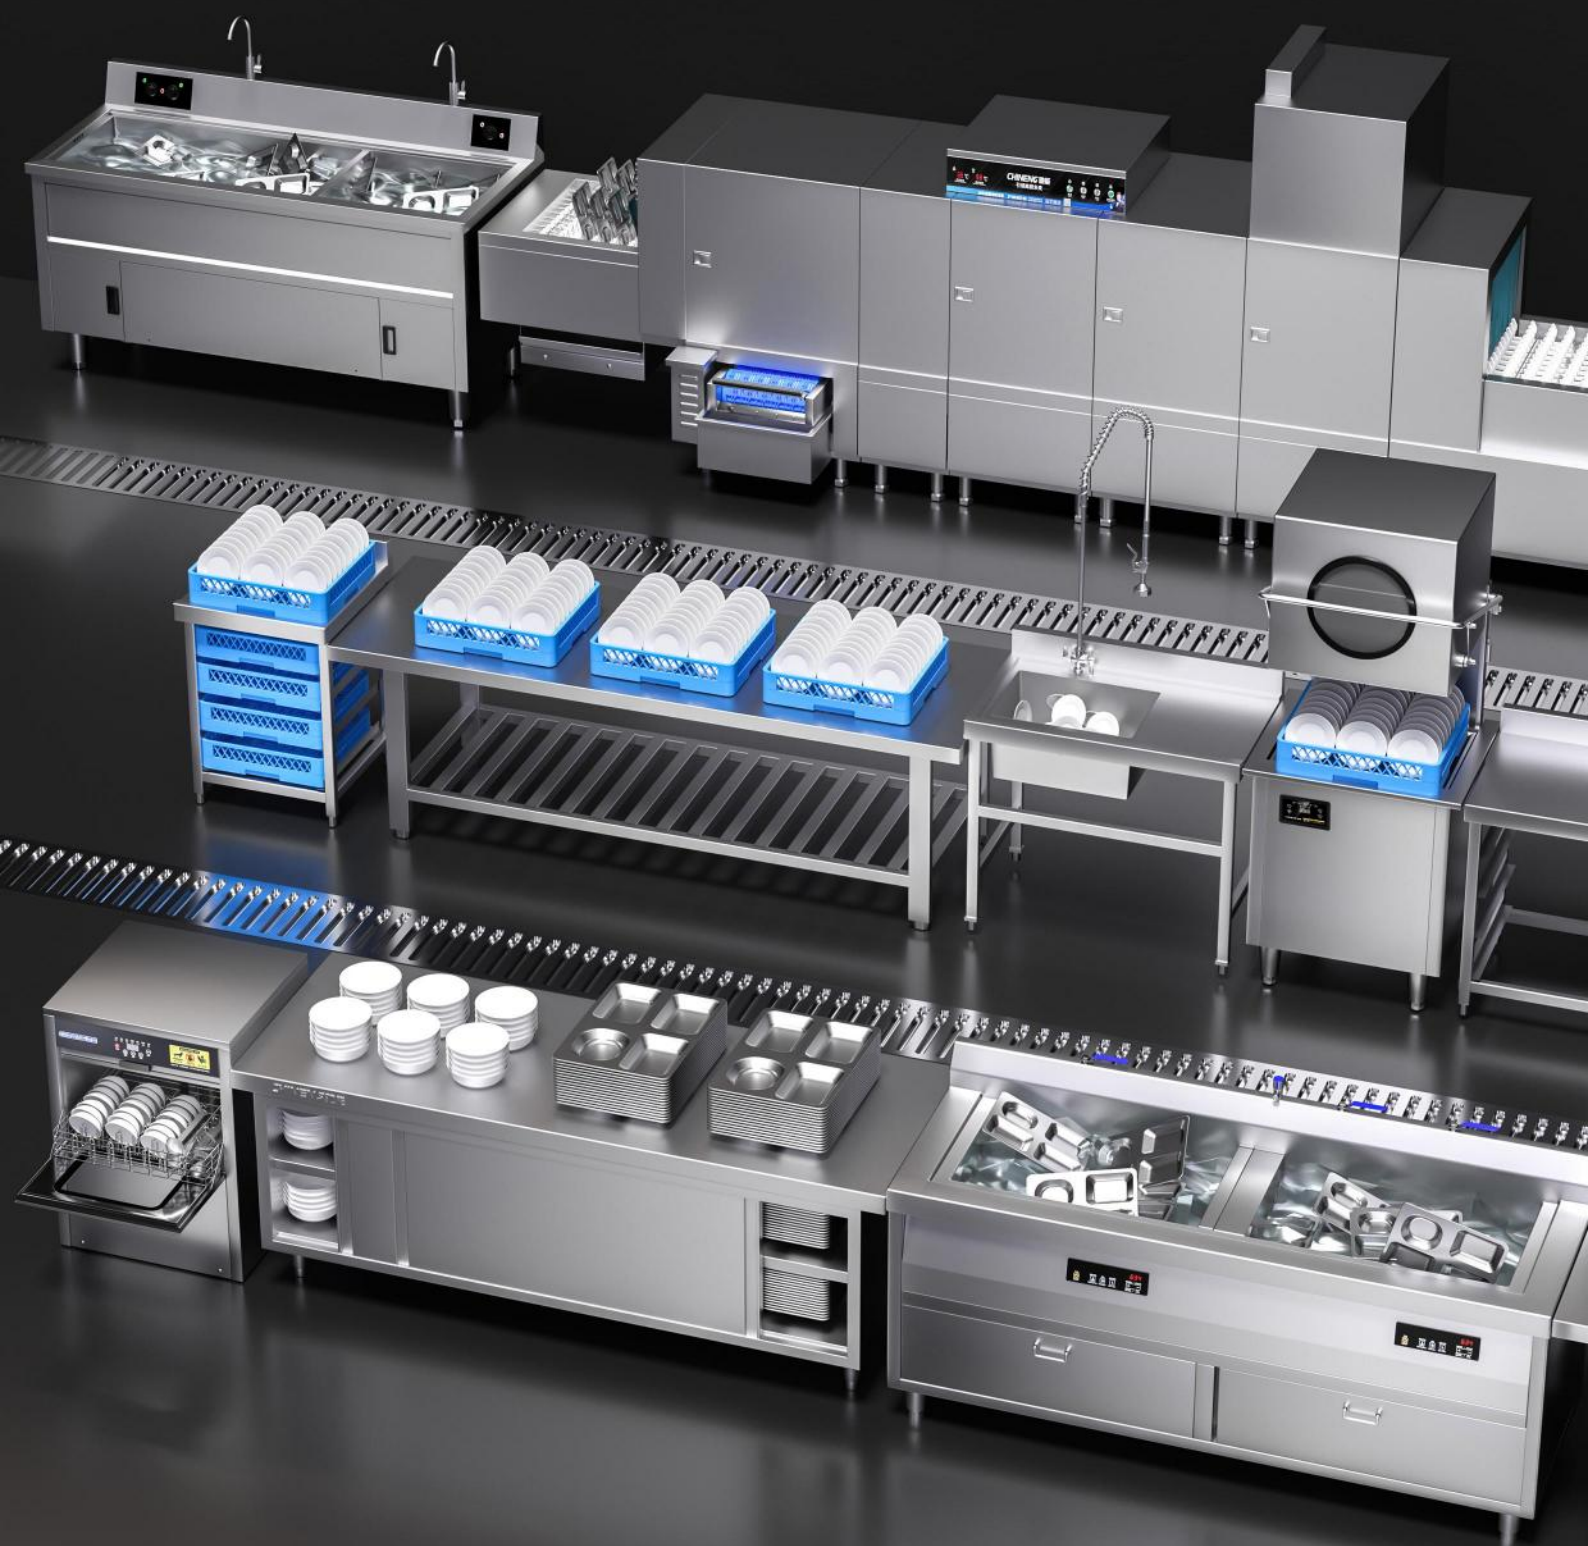

揭盖式洗碗机

Hood type dishwasher

- 清洗+消毒+催干
Cleaning + disinfection + drying
- 热能回收节能省水
Heat energy recovery saves energy and water



创业款双泵 Start-up style double pump

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage
CN-8001-CY-JGS	710*760*1390	5/7/9KW	220V/380V

创业款双泵 升级款 Start-up style double pump Upgrade style

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage
CN-8001-CYS-JGS	710*760*1390	5/7/9KW	220V/380V



连锁热能回收款 Chain heat energy recovery style

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage
CN-8158-JGS-RN	700*800*1480	6.7/9.7KW	220V/380V

连锁热能回收款 升级款 Chain heat energy recovery style Upgrade style

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage
CN-8158-JGS-SRN	700*800*1480	6.7/9.7KW	220V/380V



／ 旗舰双泵款
/ Flagship double pump style



／ 粉面店专用加大款
/ Noodle shop special increase style



／ 双泵清洗双筐款
/ Double pump cleaning double-basket style

旗舰双泵款 Flagship double pump style

粉面店专用加大款 Noodle shop special increase style

双泵清洗双筐款 Double pump cleaning double-basket style

型号 Model	CN-8038-JGS-CX1	CN-8038-FM-JD	CN-8038-DB
尺寸 Size(mm)	680*780*1350	780*880*1420	1280*830*1385
功率 Power	7/9/12KW	12/15KW	18KW
电压 Voltage	380V	380V	380V



／ 叠拉式款
／ Stackable style



／ 嵌入式款
／ Embedded style

	叠拉式款 Stackable style	嵌入式款 Embedded style
型号 Model	CN-8038-DL	CN-8038-SKJ
尺寸 Size(mm)	660*655*1350	600*628*820
功率 Power	7/9/12KW	1.5/2KW
电压 Voltage	220V/380V	220V

长龙式洗碗机 Conveyor dishwasher

- 清洗+消毒+烘干+除渣
Cleaning + disinfection + drying + residue removal
- 热能回收节能省水
Heat energy recovery saves energy and water



／ 旗舰款 平放式
／ Flagship style Flat placement type



／ 旗舰款 斜插式
／ Flagship style Inclined insertion type

旗舰款 平放式 Flagship style Flat placement type

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	机体模块 Body module
CN-PFS-160D-S	1600*850*1420	27.8KW/380V	主洗*1+漂洗*1 Main wash *1+ rinse *1
CN-8022-PFS-Z1P2-L31	3100*850*1550	43.9KW/380V	主洗*1+漂洗*2 Main wash *1+ rinse *2
CN-8022-PFS-Z1P1H1-L34	3400*850*1900	56.4KW/380V	主洗*1+漂洗*1+烘干*1 Main wash *1+ rinse *1+ drying *1
CN-8022-PFS-Z1P2H1-L41	4100*850*1900	56.7KW/380V	主洗*1+漂洗*2+烘干*1 Main wash *1+ rinse *2+ drying *1
CN-8022-PFS-Z1P2H2-L45	4500*850*1900	61.4KW/380V	主洗*1+漂洗*2+烘干*2 Main wash *1+ rinse *2+ drying *2
CN-8022-PFS-Z2P1H2-L58	5800*850*1900	68.7KW/380V	主洗*2+漂洗*1+烘干*2 Main wash *2+ rinse *1+ drying *2
CN-8022-PFS-Z2P2H2-L61	6100*850*1900	69.1KW/380V	主洗*2+漂洗*2+烘干*2 Main wash *2+ rinse *2+ drying *2

旗舰款 斜插式 Flagship style Inclined insertion type

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	机体模块 Body module
CN-8022-XCS-Z1P1-L23	2300*850*1520	27.8KW/380V	主洗*1+漂洗*1 Main wash *1+ rinse *1
CN-8022-XCS-Z1P2-L31	3100*850*1550	43.9KW/380V	主洗*1+漂洗*2 Main wash *1+ rinse *2
CN-8022-XCS-Z1P1H1-L35	3500*850*1900	56.4KW/380V	主洗*1+漂洗*1+烘干*1 Main wash *1+ rinse *1+ drying *1
CN-8022-XCS-Z1P2H2-L45	4500*850*1900	61.4KW/380V	主洗*1+漂洗*2+烘干*2 Main wash *1+ rinse *2+ drying *2
CN-8022-XCS-Z2P1H2-L58	5800*850*1900	68.7KW/380V	主洗*2+漂洗*1+烘干*2 Main wash *2+ rinse *1+ drying *2
CN-8022-XCS-Z2P2H2-L61	6100*850*1900	69.1KW/380V	主洗*2+漂洗*2+烘干*2 Main wash *2+ rinse *2+ drying *2



／ 旗舰款 平放式 免烟罩

／ Flagship style Flat placement type Steam recovery



／ 旗舰款 斜插式 免烟罩

／ Flagship style Inclined insertion type Steam recovery

旗舰款 平放式 免烟罩 Flagship style Flat placement type Steam recovery

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	机体模块 Body module
CN-8022-PFS-Z1P1-M28	2800*850*1550	43.9KW/380V	主洗*1+漂洗*1 Main wash *1+ rinse *1
CN-8022-PFS-Z1P2H1-M41	4100*850*1900	56.4KW/380V	主洗*1+漂洗*2+烘干*1 Main wash *1+ rinse *2+ drying *1
CN-8022-PFS-Z1P2H2-M45	4500*850*1900	61.4KW/380V	主洗*1+漂洗*2+烘干*2 Main wash *1+ rinse *2+ drying *2
CN-8022-PFS-Z2P2H2-M55	5500*850*1900	69.1KW/380V	主洗*2+漂洗*2+烘干*2 Main wash *2+ rinse *2+ drying *2

旗舰款 斜插式 免烟罩 Flagship style Inclined insertion type Steam recovery

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	机体模块 Body module
CN-8022-XCS-Z1P1-M28	2800*850*1550	43.9KW/380V	主洗*1+漂洗*1 Main wash *1+ rinse *1
CN-8022-XCS-Z1P1H1-M38	3800*850*1900	56.4KW/380V	主洗*1+漂洗*1+烘干*1 Main wash *1+ rinse *1+ drying *1
CN-8022-XCS-Z1P2H2-M45	4500*850*1900	61.4KW/380V	主洗*1+漂洗*2+烘干*2 Main wash *1+ rinse *2+ drying *2
CN-8022-XCS-Z2P2H2-M55	5500*850*1900	69.1KW/380V	主洗*2+漂洗*2+烘干*2 Main wash *2+ rinse *2+ drying *2



／ 至尊款 平放式

／ Supreme style Flat placement type

至尊款 平放式 Supreme style Flat placement type

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	机体模块 Body module
CN-8021-PFS-Z1P1-MA16D	1600*800*1450	26.1KW/380V	主洗*1+漂洗*1 Main wash *1+ rinse *1
CN-8021-PFS-Z2P1-MA275	2750*880*1450	43.1KW/380V	主洗*2+漂洗*1 Main wash *2+ rinse *1
CN-8021-PFS-Z2P2-MA31	3100*880*1450	42.35KW/380V	主洗*2+漂洗*2 Main wash *2+ rinse *2
CN-8021-PFS-Z1P1H1-MA34	3400*880*1950	56.7KW/380V	主洗*1+漂洗*1+烘干*1 Main wash *1+ rinse *1+ drying *1
CN-8021-PFS-Z1P2H1-MA375	3750*880*1950	56.85KW/380V	主洗*1+漂洗*2+烘干*1 Main wash *1+ rinse *2+ drying *1
CN-8021-PFS-Z2P2H1-MA44	4400*880*1950	60KW/380V	主洗*2+漂洗*2+烘干*1 Main wash *2+ rinse *2+ drying *1
CN-8021-PFS-Z2P2H2-MA58	5800*880*1950	80KW/380V	主洗*2+漂洗*2+烘干*2 Main wash *2+ rinse *2+ drying *2



至尊款 斜插式
Supreme style Inclined insertion type

至尊款 斜插式 Supreme style Inclined insertion type

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	机体模块 Body module
CN-8021-XCS-Z1P1-GY235B	2350*900*1600	26.8KW/380V	主洗*1+漂洗*1 Main wash *1+ rinse *1
CN-8021-XCS-Z2P2-GY425B	4250*900*1600	56.35KW/380V	主洗*2+漂洗*2 Main wash *2+ rinse *2
CN-8021-XCS-Z1P1H1-GY355B	3550*900*2050	59.55KW/380V	主洗*1+漂洗*1+烘干*1 Main wash *1+ rinse *1+ drying *1
CN-8021-XCS-Z1P2H1-GY435B	4350*900*2050	59.7KW/380V	主洗*1+漂洗*2+烘干*1 Main wash *1+ rinse *2+ drying *1
CN-8021-XCS-Z1P2H2-GY495B	4950*900*2050	70.45KW/380V	主洗*1+漂洗*2+烘干*2 Main wash *1+ rinse *2+ drying *2
CN-8021-XCS-Z2P1H1-GY48B	4800*900*2050	70.95KW/380V	主洗*2+漂洗*1+烘干*1 Main wash *2+ rinse *1+ drying *1
CN-8021-XCS-Z2P2H1-CZ55	5500*900*2050	66.3KW/380V	主洗*2+漂洗*2+烘干*1 (带除渣) Main wash *2+ Rinse *2+ drying *1 (with slag)
CN-8021-XCS-Z2P2H2-GY565B	5650*900*2050	81.85KW/380V	主洗*2+漂洗*2+烘干*2 Main wash *2+ Rinse *2+ drying *2



工程款 平放式
Engineering style Flat placement type



工程款 斜插式
Engineering style Inclined insertion type

工程款 平放式 Engineering style Flat placement type

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	机体模块 Body module
CN-8001-PFS-Z1P1-16R	1600*900*1450	48KW/380V	主洗*1+漂洗*1 Main wash *1+ rinse *1
CN-8001-PFS-Z2P1-26R	2600*900*1450	48KW/380V	主洗*2+漂洗*1 Main wash *2+ rinse *1
CN-8001-PFS-Z1P1H1-29R	2900*900*1870	63KW/380V	主洗*1+漂洗*1+烘干*1 Main wash *1+ rinse *1+ drying *1
CN-8001-PFS-Z1P2H1-39R	3900*900*1870	63KW/380V	主洗*1+漂洗*2+烘干*1 Main wash *1+ rinse *2+ drying *1
CN-8001-PFS-Z1P2H2-47R	4700*900*1870	78KW/380V	主洗*1+漂洗*2+烘干*2 Main wash *1+ rinse *2+ drying *2

工程款 斜插式 Engineering style Inclined insertion type

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	机体模块 Body module
CN-8001-XCS-Z1P1-26R	2600*900*1630	48KW/380V	主洗*1+漂洗*1 Main wash *1+ rinse *1
CN-8001-XCS-Z1P1H1-41R	4100*900*2060	63KW/380V	主洗*1+漂洗*1+烘干*1 Main wash *1+ rinse *1+ drying *1
CN-8001-XCS-Z2P2-46R	4600*900*1630	63KW/380V	主洗*2+漂洗*2 Main wash *2+ rinse *2
CN-8001-XCS-Z1P2H1-49R	4900*900*2060	63KW/380V	主洗*1+漂洗*2+烘干*1 Main wash *1+ rinse *2+ drying *1
CN-8001-XCS-Z1P2H2-57R	5700*900*2060	78KW/380V	主洗*1+漂洗*2+烘干*2 Main wash *1+ rinse *2+ drying *2
CN-8001-XCS-Z2P2H1-57R	5700*900*2060	75KW/380V	主洗*2+漂洗*2+烘干*1 Main wash *2+ rinse *2+ drying *1
CN-8001-XCS-Z2P2H2-65R	6500*900*2060	90KW/380V	主洗*2+漂洗*2+烘干*2 Main wash *2+ rinse *2+ drying *2

超声波洗碗机

Ultrasonic dishwasher

- 40KHZ高频振子
40KHZ high-frequency oscillator
- 304不锈钢发热管
304 stainless steel heating tube



连锁款
Chain style

连锁款 Chain style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	洗涤量 Washing volume	振子 Oscillator
CN-8005-CSB-600A	600*550*800	4.5KW/220V	320碟/时 320 discs/hour	10
CN-8005-CSB-800A	800*750*800	4.5KW/220V	420碟/时 420 discs/hour	20
CN-8005-CSB-1000A	1000*750*800	6KW/220V	520碟/时 520 discs/hour	25
CN-8005-CSB-1200A	1200*750*800	6KW/220V	620碟/时 620 discs/hour	35
CN-8005-CSB-1500A	1500*750*800	6KW/220V	820碟/时 820 discs/hour	40



至尊款
Supreme style

至尊款 (单池) Supreme style (Single pool)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	洗涤量 Washing volume	振子 Oscillator
CN-HY-XWJ600-B01	600*550*800+140	4.5KW/220V	320碟/时 320 discs/hour	12
CN-HY-XWJ800-B02	800*750*800+140	4.5KW/220V	420碟/时 420 discs/hour	24
CN-HY-XWJ1000-B03	1000*750*800+140	6KW/220V	520碟/时 520 discs/hour	30
CN-HY-XWJ1200-B04	1200*750*800+140	6KW/220V	620碟/时 620 discs/hour	40
CN-HY-XWJ1500-B05	1500*750*800+140	6KW/220V	820碟/时 820 discs/hour	50
CN-HY-XWJ1800-B06	1800*750*800+140	9KW/220V	1020碟/时 1020 discs/hour	50
CN-HY-XWJ2000-B07	2000*750*800+140	9KW/220V	1120碟/时 1120 discs/hour	50

至尊款 (双池) Supreme style (Double pool)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	洗涤量 Washing volume	振子 Oscillator
CN-HY-XWJ1800-B08	1800*750*800+140	9KW/220V	620碟/时 620 discs/hour	30
CN-HY-XWJ2000-B09	2000*750*800+140	9KW/220V	720碟/时 720 discs/hour	35



／ 旗舰款
／ Flagship style

旗舰款 (单池) Flagship style (Single pool)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	洗涤量 Washing volume	振子 Oscillator
CN-HY-XWJ600-C01	600*550*800+140	4.5KW/220V	320碟/时 320 discs/hour	12
CN-HY-XWJ800-C02	800*750*800+140	4.5KW/220V	420碟/时 420 discs/hour	24
CN-HY-XWJ1000-C03	1000*750*800+140	6KW/220V	520碟/时 520 discs/hour	30
CN-HY-XWJ1200-C04	1200*750*800+140	6KW/220V	620碟/时 620 discs/hour	40
CN-HY-XWJ1500-C05	1500*750*800+140	6KW/220V	820碟/时 820 discs/hour	50
CN-HY-XWJ1800-C06	1800*750*800+140	9KW/220V	1020碟/时 1020 discs/hour	50
CN-HY-XWJ2000-C07	2000*750*800+140	9KW/220V	1120碟/时 1120 discs/hour	50

旗舰款 (双池) Flagship style (Double pool)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	洗涤量 Washing volume	振子 Oscillator
CN-HY-XWJ1800-C08	1800*750*800+140	9KW/220V	620碟/时 620 discs/hour	30
CN-HY-XWJ2000-C09	2000*750*800+140	9KW/220V	720碟/时 720 discs/hour	35



／ 工程款
／ Engineering style

工程款 (单池) Engineering style (Single pool)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	洗涤量 Washing volume	振子 Oscillator
CN-CSB-K08B	800*700*950	3KW/220V	420碟/时 420 discs/hour	16
CN-CSB-K10B	1000*700*950	4.5KW/220V	520碟/时 520 discs/hour	24
CN-CSB-K12B	1200*700*950	5KW/220V	620碟/时 620 discs/hour	32
CN-CSB-K15B	1500*700*950	5.5KW/220V	820碟/时 820 discs/hour	40
CN-CSB-K18B	1800*700*950	5.8KW/220V	1020碟/时 1020 discs/hour	48
CN-CSB-K20B	2000*700*950	6KW/220V	1120碟/时 1120 discs/hour	52

工程款 (双池) Engineering style (Double pool)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	洗涤量 Washing volume	振子 Oscillator
CN-CSB-K18B-2	1800*700*950	7KW/220V	620碟/时 620 discs/hour	32
CN-CSB-K20-B	2000*700*950	7.5KW/220V	720碟/时 720 discs/hour	40

臭氧鼓泡洗菜机

Ozone bubble vegetable washing machine

- 强力鼓泡冲浪清洗
Powerful bubble surf cleaning
- 高效清洗，不伤菜叶
Efficient cleaning without damaging the vegetable leaves



臭氧鼓泡洗菜机

Ozone bubble vegetable washing machine

三合一洗菜机 (臭氧+鼓泡+加热) Three-in-one vegetable washer (ozone + bubbling + heating)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	喷嘴 Nozzle
CN-8005-XCJ-CY1000	1000*800*800+150	4KW/220V	10
CN-8005-XCJ-CY1200	1200*800*800+150	4KW/220V	12
CN-8005-XCJ-CY1500	1500*800*800+150	4KW/220V	16
CN-8005-XCJ-CY1800	1800*800*800+150	4KW/220V	18
CN-8005-XCJ-CY2000	2000*800*800+150	4KW/220V	20

四合一洗菜机 (臭氧+冲浪+鼓泡+加热) Four-in-one vegetable washer (Ozone + wave + bubble + heating)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	喷嘴 Nozzle
CN-8005-XCJ-CL1000	1000*800*800+150	4KW/220V	20
CN-8005-XCJ-CL1200	1200*800*800+150	4KW/220V	24
CN-8005-XCJ-CL1500	1500*800*800+150	4KW/220V	32
CN-8005-XCJ-CL1800	1800*800*800+150	4KW/220V	36
CN-8005-XCJ-CL2000	2000*800*800+150	4KW/220V	40



解冻降解洗肉机

Defrosting degradation meat washing machine

解冻降解洗肉机 Defrosting degradation meat washing machine

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	机体模块 Body module	清洗能力 Cleaning capacity
CN-YSJK-QX170-XR	1000*850*960	1.6KW/220V	单缸 Single cylinder	肉类精洗60-70斤/次 Meat fine wash 60-70 kg/time



/ 消毒洗菜机

/ Disinfection and vegetable washing machine

消毒洗菜机 Disinfection and vegetable washing machine

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	机体模块 Body module	清洗能力 Cleaning capacity
CN-YSJK-QX170	1000*850*960	1.3KW/220V	单缸 Single cylinder	蔬菜>100kg/h 水果>225kg/h Vegetables >100kg/h, fruits >225kg/h
CN-YSJK-QX1500	1500*850*960	1.8KW/220V	单缸 Single cylinder	蔬菜>170kg/h 水果>250kg/h Vegetables >170kg/h, fruits >250kg/h
CN-YSJK-QXS1500	1500*750*960	1.3KW/220V	双缸 Double cylinder	蔬菜>170kg/h 水果>250kg/h Vegetables >170kg/h, fruits >250kg/h
CN-YSJK-QX350	1800*850*960	2.45KW/220V	单缸 Single cylinder	蔬菜>300kg/h 水果>450kg/h Vegetables >300kg/h, fruits >450kg/h
CN-YSJK-QXS350	1800*750*960	1.5KW/220V	双缸 Double cylinder	蔬菜>230kg/h 水果>320kg/h Vegetables >230kg/h, fruits >320kg/h
CN-YSJK-QX2020D	2020*860*960	2.9KW/380V	单缸 Single cylinder	蔬菜>415kg/h 水果>500kg/h Vegetables >415kg/h, fruits >500kg/h
CN-YSJK-QXS2020	2020*860*960	2.3KW/220V	双缸 Double cylinder	蔬菜>335kg/h 水果>415kg/h Vegetables >335kg/h, fruits >415kg/h
CN-YSJK-QX2440	2440*860*960	3.5KW/380V	单缸 Single cylinder	蔬菜>500kg/h 水果>600kg/h Vegetables >500kg/h, fruits >600kg/h
CN-YSJK-QXS2440	2440*860*960	3.2KW/220V	双缸 Double cylinder	蔬菜>400kg/h 水果>500kg/h Vegetables >400kg/h, fruits >500kg/h
CN-YSJK-QXL2440	2650*860*1270	3.8KW/380V	单缸连续式 Single cylinder continuous	蔬菜>800kg/h 水果>1000kg/h Vegetables >800kg/h, fruits >1000kg/h

水触媒食品净化机

Water catalyst food purifier

- 深度净化，除菌率99.9%
Deep purification, with a 99.9% sterilization rate
- 无任何化学添加
No chemical additives at all



/ 水触媒食品净化机

/ Water catalyst food purifier

水触媒食品净化机 Water catalyst food purifier

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	机体模块 Body module	清洗能力 Cleaning capacity
CN-YSJK-JQ1200	1200*860*960	2.8KW/380V	单缸 Single cylinder	约12kg/次/12分钟 About 12kg/ time /12 minutes
CN-YSJK-JQS1800-A	1800*860*960	3.2KW/380V	双缸 (单净化) Double cylinder (single purification)	约30kg/次/12分钟 About 30kg/ time /12 minutes
CN-YSJK-JQS1800-B	1800*860*960	5.2KW/380V	双缸 (双净化) Double cylinder (double purification)	约30kg/次/12分钟 About 30kg/ time /12 minutes
CN-YSJK-JQL2440-A	2440*1060*1250	5.5KW/380V	单缸连续式 Single cylinder continuous	约100kg/次/15分钟 About 100kg/ time /15 minutes

智能蒸汽消毒柜

Intelligent steam disinfection cabinet

- 125°C高温消毒
High-temperature disinfection at 125°C
- 热风循环烘干
Hot air circulation drying



/ 单门 (880Z)
/ Single door (880Z)



/ 双门 (1780Z)
/ Double door (1780Z)

智能蒸汽消毒柜 Intelligent steam disinfection cabinet

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	消毒温度 Disinfection temperature	容积 Volume
CN-CN-RTP880-880Z	650*650*1990	5KW/220V	30°C~125°C	400L
CN-CN-RTP1780-1780Z	1310*650*1990	7KW/220V	30°C~125°C	800L

热风循环多室消毒柜

Hot air circulation multi-chamber disinfection cabinet

- 紫外线消毒，热风循环
Ultraviolet disinfection, hot air circulation
- 单格16L大容量
Single cell 16L large capacity



热风循环多室消毒柜 Hot air circulation multi-chamber disinfection cabinet

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	消毒温度 Disinfection temperature	容积 Volume
CN-CN-XDZ360-24M	990*540*1850	2200W/220V	20°C~85°C	16L*24格 16L*24 grids
CN-CN-XDZ480-32M	1320*540*1850	3300W/380V	20°C~85°C	16L*32格 16L*32 grids
CN-CN-XDZ600-40M	1650*540*1850	4400W/380V	20°C~85°C	16L*40格 16L*40 grids
CN-CN-XDZ720-48M	1970*540*1850	5500W/380V	20°C~85°C	16L*48格 16L*48 grids
CN-CN-XDZ810-54M	1970*540*2030	5500W/380V	20°C~85°C	16L*54格 16L*54 grids
CN-CN-XDZ900-60M	1970*540*2210	5500W/380V	20°C~85°C	16L*60格 16L*60 grids
CN-CN-XDZ1050-70M	2300*540*2210	6600W/380V	20°C~85°C	16L*70格 16L*70 grids

热风循环消毒柜

Hot air circulation disinfection cabinet

- 125°C高温消毒
High-temperature disinfection at 125°C
- 热风循环烘干
Hot air circulation drying



单门 (510B)
Single door (510B)



双门 (910B)
Double door (910B)

热风循环高温消毒柜 Hot air circulation high-temperature disinfection cabinet

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容积 Volume
CN-CN-RTP510-510B	575*550*1880	900W/220V	310L
CN-CN-RTP910-910B	1160*550*1880	1870W/220V	620L



单门 (880A1)
Single door (880A1)



双门 (1780A1)
Double door (1780A1)



双门 带推车 (1780B1)
Double-door with trolley (1780B1)

智能热风循环消毒柜 Intelligent hot air circulation disinfection cabinet

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容积 Volume
CN-CN-RTP880-880A1	650*650*1990	1800W/220V	400L
CN-CN-RTP1780-1780A1	1310*650*1990	3670W/220V	800L
CN-CN-RTP1780-1780B1	1310*650*1990	3670W/220V	800L



单门 (230A)
Single door (230A)



上下门 (420A)
Upper and lower doors (420A)



双门 (950A)
Double door (950A)

机械旋钮中温消毒柜 Mechanical knob medium-temperature disinfection cabinet

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容积 Volume
CN-8050-XDZ230-230A	585*480*1325	610W/220V	205L
CN-8050-XDZ305-420A	585*480*1775	910W/220V	305L
CN-8050-XDZ610-950A	1120*480*1775	1350W/220V	610L

刀具消毒柜

Knife disinfection cabinet

- 臭氧+紫外线+热风
Ozone + ultraviolet rays + hot air
- 分区消毒，避免交叉
Disinfect by zones to avoid cross-contamination



/ 刀具消毒柜
/ Knife disinfection cabinet

/ 刀具砧板组合消毒柜
/ Cutter plate combination disinfection cabinet

	刀具消毒柜 Knife disinfection cabinet	刀具砧板组合消毒柜 Cutting board combined disinfection cabinet
型号 Model	CN-CN-XDZ180-20D-C	CN-CN-10D-5Z
尺寸 Size(mm)	670*530*880	670*580*1525
功率/电压 Power/Voltage	465W/220V	950W/220V
容积 Volume	180L (刀*20) (20 knives)	340L (刀*10+砧板*5) (10 knives + 5 cutting boards)

厨余垃圾处理器

Kitchen waste disposer

- 油、水、渣同步分离
Oil, water and residue are separated simultaneously
- 精细研磨，碎骨成渣
Fine grinding, bones crushed into slag



/ 直排式 (A4)
/ Straight line (A4)



/ 直排式 (1755)
/ Straight line (1755)

直排式 Straight line

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	处理量 Processing capacity
CN-QS-A4	450*450*946	3KW/380V	50-100kg/h 泔水 50-100kg/h of kitchen waste water
CN-QSAY-1755	1080*565*905	5.5KW/380V	200-300kg/h 泔水 200-300kg/h of kitchen waste water



/ 脱渣减量油水分离 (HS08)
/ Deslag reduction oil and water separation (HS08)



/ 脱渣减量油水分离 (HS05)
/ Deslag reduction oil and water separation (HS05)



/ 脱渣减量油水分离 (HS03)
/ Deslag reduction oil and water separation (HS03)

脱渣减量油水分离 Deslag reduction oil and water separation

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	处理量 Processing capacity
CN-QS-HS08	950*820*980	8.2KW/380V	50-120kg/h 泔水 50-120kg/h of kitchen waste water
CN-QS-HS05	1200*755*1030	7.5KW/380V	50-100kg/h 泔水 50-100kg/h of kitchen waste water
CN-QS-HS03	1600*880*1030	9KW/380V	200-300kg/h 泔水 200-300kg/h of kitchen waste water

CHINENG STEAMING AND BAKING SERIES

驰能 | 蒸烤系列

蒸饭柜·海鲜蒸柜·蒸烤箱·烤鸭炉·电饼铛

RICE STEAMING CABINET, SEAFOOD STEAMING CABINET,
STEAMING OVEN, ROAST DUCK OVEN, ELECTRIC BAKING PAN



万能蒸烤箱

Universal steam oven

- 蒸/烤/炸/炖/焖
Steaming, roasting, frying, stewing and braising
- 一键自动清洗
One-click automatic cleaning



/ 创业款 (旋钮) 小5盘
/ Startup style (knob) small 5 plates



/ 创业款 (旋钮) 6盘
/ Startup style (knob) 6 plates



/ 创业款 (旋钮) 10盘
/ Startup style (knob) 10 plates

创业款 (旋钮) Startup style (knob)

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	温度范围 Temperature	盘数 Number of plates
CN-8047-ZKX-E05	830*562*690	6KW+6KW	380V	60-320°C	小5盘 Small 5 plates
CN-8047-ZKX-E06	830*785*780	9KW+6KW	380V	60-320°C	6盘 6 plates
CN-8047-ZKX-E10	830*785*1100	18KW+9KW	380V	60-320°C	10盘 10 plates



/ 微波烤箱 6盘 (WK6)
/ Microwave oven 6 plates (WK6)



/ 创业款 (触屏) 6盘
/ Startup style (touch screen) 6 plates



/ 创业款 (触屏) 10盘
/ Startup style (touch screen) 10 plates

创业款 (触屏) Startup style (Touch screen)

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	温度范围 Temperature	盘数 Number of plates
CN-8047-WK6	650*680*(800+60)	7.2KW	220V/380V	35~280°C	6盘 6 plates
CN-8047-ZKX-E06SE	830*785*780	9KW+6KW	380V	35~280°C	6盘 6 plates
CN-8047-ZKX-E10SE	830*785*1100	18KW+9KW	380V	35~280°C	10盘 10 plates



/ 连锁款 4盘
/ Chain style 4 plates



/ 连锁款 6盘
/ Chain style 6 plates



/ 连锁款 10盘
/ Chain style 10 plates



/ 连锁款 20盘
/ Chain style 20 plates

连锁款 Chain style

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	温度范围 Temperature	盘数 Number of plates
CN-8162-ZKX-C04	730*740*690	烘烤 Baking 6KW+蒸汽 Steam 6KW	380V	25-300°C	4盘 4 plates
CN-8162-ZKX-C06	880*850*870	烘烤 Baking 9KW+蒸汽 Steam 9KW	380V	25-300°C	6盘 6 plates
CN-8162-ZKX-C10	880*850*1150	烘烤 Baking 18KW+蒸汽 Steam 18KW	380V	25-300°C	10盘 10 plates
CN-8162-ZKX-C20	900*960*1880	烘烤 Baking 36KW+蒸汽 Steam 18KW	380V	25-300°C	20盘 20 plates



/ 连锁款 单组合
/ Chain style Single combination



/ 连锁款 双组合
/ Chain style Double combination



/ 连锁款 三组合
/ Chain style Triple combination



/ 连锁款 四组合
/ Chain style Quadruple combination

连锁款 组合 Chain style Combinations

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	温度范围 Temperature	盘数 Number of plates
CN-8162-ZKX-C03	730*740*530	烘烤 Baking 3KW+蒸汽 Steam 3KW	380V	25-260°C	3盘 单组合 3 plates Single combination
CN-8162-ZKX-C03-2	750*770*1020	烘烤 Baking 3KW*2+蒸汽 Steam 3KW*2	380V	25-260°C	3盘 双组合 3 plates Double combination
CN-8162-ZKX-C03-3	750*770*1430	烘烤 Baking 3KW*3+蒸汽 Steam 3KW*3	380V	25-260°C	3盘 三组合 3 plates Triple combination
CN-8162-ZKX-C03-4	750*770*1800	烘烤 Baking 3KW*4+蒸汽 Steam 3KW*4	380V	25-260°C	3盘 四组合 3 plates Quadruple combination



企业款 4盘
Corporate style 4 plates



企业款 6盘
Corporate style 6 plates



企业款 10盘
Corporate style 10 plates



企业款 20盘
Corporate style 20 plates

企业款 Corporate style

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	温度范围 Temperature	盘数 Number of plates
CN-JX-NC0423T	744*657*704	6.1KW	380V	30~300°C	4盘 4 plates
CN-JX-NC0611T	963*876*943	12.3KW	380V	30~300°C	6盘 6 plates
CN-JX-NC1011T	963*876*1152	18.3KW	380V	30~300°C	10盘 10 plates
CN-JX-NC2011T	973*878*1871	37KW	380V	30~300°C	20盘 20 plates



连锁餐饮款 4盘
Chain restaurant style 4 plates



连锁餐饮款 6盘
Chain restaurant style 6 plates



工程智能款 4盘
Engineering intelligent style 4 plates



工程智能款 6盘
Engineering intelligent style 6 plates

连锁餐饮款 Chain restaurant style

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	温度范围 Temperature	盘数 Number of plates
CN-JC-KX4-220/6-4P12R	876*727*720	6KW	220V	50~250°C	4盘 4 plates
CN-JC-KX4-380/6-4P12R	876*727*720	6KW	380V	50~250°C	4盘 4 plates
CN-JC-KX6-220/9-6P12R	826*755*970	9KW	220V	50~250°C	6盘 6 plates
CN-JC-KX6-380-9-6P12R	826*755*970	9KW	380V	50~250°C	6盘 6 plates

工程智能款 Engineering intelligent style

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	温度范围 Temperature	盘数 Number of plates
CN-JC-KX4S-220/6-4P18R	876*727*720	6KW	220V	50~280°C	4盘 4 plates
CN-JC-KX4S-380/6-4P18R	876*727*720	6KW	380V	50~280°C	4盘 4 plates
CN-JC-KX6S-220/9-6P18R	826*755*970	9KW	220V	50~280°C	6盘 6 plates
CN-JC-KX6S-380-9-6P18R	826*755*970	9KW	220V	50~280°C	6盘 6 plates

烘焙电烤箱

Baking electric oven

- 上下独立温控
Independent temperature control at the top and bottom
- 大容量 真商用
Large-capacity commercial use



/ 旋钮款-1层1盘
/ Knob style - 1 layer 1 plate



/ 旋钮款-2层2盘
/ Knob style - 2 layers 2 plates



/ 旋钮款-3层3盘
/ Knob style - 3 layers 3 plates

旋钮款 Knob style

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	盘数 Number of plates	温度范围 Temperature range
CN-8065-DKX-WFC-101D-XN	940*710*425	4.4KW	220V	1层1盘 1 layer 1 plate	室温 Room temperature -350°C
CN-8065-DKX-WFC-202D-XN	940*710*830	8.8KW	220V/380V	2层2盘 2 layers 2 plates	室温 Room temperature -350°C
CN-8065-DKX-WFC-303D-XN	940*710*1140	13.2KW	380V	3层3盘 3 layers 3 plates	室温 Room temperature -350°C



/ 智能款-1层1盘
/ Smart style - 1 layer 1 plate



/ 智能款-2层2盘
/ Smart style - 2 layers 2 plates



/ 智能款-3层3盘
/ Smart style - 3 layers 3 plates

智能款 Smart style

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	盘数 Number of plates	温度范围 Temperature range
CN-8065-DKX-WFC-101DI-DN	940*710*425	4.4KW	220V	1层1盘 1 layer 1 plate	室温 Room temperature -400°C
CN-8065-DKX-WFC-202DI-DN	940*710*830	8.8KW	220V/380V	2层2盘 2 layers 2 plates	室温 Room temperature -400°C
CN-8065-DKX-WFC-303DI-DN	940*710*1140	13.2KW	380V	3层3盘 3 layers 3 plates	室温 Room temperature -400°C



/ 仪表款-1层2盘
/ Instrument style - 1 layer 2 plates



/ 仪表款-2层4盘
/ Instrument style - 2 layers 4 plates



/ 仪表款-3层6盘
/ Instrument style - 3 layers 6 plates



/ 仪表款-3层9盘
/ Instrument style - 3 layers 9 plates

仪表款 Instrument style

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	盘数 Number of plates	温度范围 Temperature range
CN-8065-DKX-WFC-102D-YB	1240*875*610	6.6KW	220V/380V	1层2盘 1 layer 1 plates	室温 Room temperature-350°C
CN-8065-DKX-WFC-204D-YB	1240*875*1260	13.2KW	380V	2层4盘 2 layers 1 plates	室温 Room temperature-350°C
CN-8065-DKX-WFC-306D-YB	1240*875*1660	19.8KW	380V	3层6盘 3 layers 6 plates	室温 Room temperature-350°C
CN-8065-DKX-WFC-309D-YB	1660*875*1660	24KW	380V	3层9盘 3 layers 9 plates	室温 Room temperature-350°C



/ 电脑款-1层
/ Computer style - 1 layer



/ 电脑款-2层
/ Computer style - 2 layers



/ 电脑款-3层
/ Computer style - 3 layers

电脑款 Computer style

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	盘数 Number of plates	温度范围 Temperature range
CN-8065-DKX-WFC-102DJ-DN	1240*875*610	6.6KW	220V/380V	1层2盘 1 layer 2 plates	室温 Room temperature-400°C
CN-8065-DKX-WFC-204DJ-DN	1240*875*1260	13.2KW	380V	2层4盘 2 layers 1 plates	室温 Room temperature-400°C
CN-8065-DKX-WFC-306DJ-DN	1240*875*1660	19.8KW	380V	3层6盘 3 layers 6 plates	室温 Room temperature-400°C
CN-DKX-8065-WFC-103DJ-DN	1660*875*610	8KW	380V	1层3盘 1 layer 3 plates	室温 Room temperature-400°C
CN-DKX-8065-WFC-206DJ-DN	1660*875*1260	16KW	380V	2层6盘 2 layers 6 plates	室温 Room temperature-400°C
CN-DKX-8065-WFC-309DJ-DN	1660*875*1660	24KW	380V	3层9盘 3 layers 9 plates	室温 Room temperature-400°C



/ 仪表款1层2盘电烤箱
+5层10盘发酵箱
/ Instrument style 1-layer 2-panel electric oven
+ 5-layer 10-tray fermentation box



/ 仪表款2层4盘电烤箱
+5层10盘发酵箱
/ Instrument style 2-layer 4-tray electric oven
+ 5-layer 10-tray fermentation box



/ 电脑款1层2盘电烤箱
+5层10盘发酵箱
/ Computer style 1-layer 2-panel electric oven
+ 5-layer 10-tray fermentation box



/ 电脑款2层4盘电烤箱
+5层10盘发酵箱
/ Computer style 2-layer 4-panel electric oven
+ 5-layer 10-tray fermentation box

组合款 (电烤箱+发酵箱) Combination style (Electric oven + Fermentation oven)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	盘数 Number of plates	温度范围 Temperature range
CN-DKX-8065-WFC-102DF	1220*855*1470	9.4KW/380V	1层2盘 (仪表款) 1 layer 2 plates (instrument style)	室温-400°C (电烤箱) Room temperature -400°C (Electric oven)
CN-DKX-8065-WFC-204DF	1220*855*1875	16KW/380V	2层4盘 (仪表款) 2 layers 4 plates (instrument style)	室温-400°C (电烤箱) Room temperature -400°C (Electric oven)
CN-DKX-8065-WFC-102DFJ	1220*855*1470	9.4KW/380V	1层2盘 (电脑款) 1 layer 2 plates (computer style)	室温-400°C (电烤箱) Room temperature -400°C (Electric oven)
CN-DKX-8065-WFC-204DFJ	1220*855*1875	16KW/380V	2层4盘 (电脑款) 2 layers 2 plates (computer style)	室温-400°C (电烤箱) Room temperature -400°C (Electric oven)



／ 热风循环喷雾电烘炉-5层
/ Hot air circulation spray electric oven - 5 layers



／ 热风循环喷雾电烘炉-8层
/ Hot air circulation spray electric oven - 8 layers



／ 热风循环喷雾电烘炉-10层
/ Hot air circulation spray electric oven - 10 layers

热风循环喷雾电烘炉 Hot air circulation spray electric oven

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	层数 Number of layers	温度范围 Temperature range
CN-PWRFL-8065-WFC-5D	900*1120*750	7.5KW/380V	5层 5 layers	室温 Room temperature-400°C
CN-PWRFL-8065-WFC-8D	900*1120*1285	15KW/380V	8层 8 layers	室温 Room temperature-400°C
CN-PWRFL-8065-WFC-10D	900*1120*1510	15KW/380V	10层 10 layers	室温 Room temperature-400°C

智能烘焙披萨炉 Intelligent pizza baking oven

- 热风环流循环
Hot air circulation
- 智能恒温系统
Intelligent constant temperature system



／ 智能烘焙披萨炉
/ Intelligent pizza baking oven

智能烘焙披萨炉 Intelligent pizza baking oven

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	温度范围 Temperature range
CN-YDE-LK-310Z-10	1047*760*480	6.5KW/380V	室温 Room temperature-300°C
CN-YDE-LK-406Z-14	1220*850*480	6.5KW/380V	室温 Room temperature-300°C

透窗智能蒸柜

Window-through intelligent steamer

- 独立分层控制
Independent hierarchical control
- 独立蒸汽发生器
Independent steam generator



/ ZD系列 两门
/ ZD series two-door



/ ZD系列 三门
/ ZD series three-door

ZD系列 ZD Series

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	门数 Number of doors	盘数 Number of plates	适用人数 Applicable number of people
CN-8010-ZD2	910*830*1290	12KW/380V	两门 Two doors	6盘 6 plates	150~220人 150 to 220 people
CN-8010-ZD3	910*830*1770	18KW/380V	三门 Three doors	9盘 9 plates	200~300人 200 to 300 people



/ WA系列 两门
/ WA series two doors



/ WA系列 三门
/ WA series three-door

WA系列 WA Series

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	门数 Number of doors	盘数 Number of plates	适用人数 Applicable number of people
CN-8009-WA-2-8/220	1000*630*1280	8KW/220V	两门 Two doors	6盘 6 plates	150~220人 150 to 220 people
CN-8009-WA-2-9/380	1000*630*1280	9KW/380V	两门 Two doors	6盘 6 plates	150~220人 150 to 220 people
CN-8009-WA-3	1000*630*1780	13.5KW/380V	三门 Three doors	9盘 9 plates	200~300人 200 to 300 people



/ YTS系列 两门
/ YTS series two doors



/ YTS系列 三门
/ YTS series three-door

YTS系列 YTS Series

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	门数 Number of doors	盘数 Number of plates	适用人数 Applicable number of people
CN-8002-DMG-YTS-2M	988*640*1590	12KW/380V	两门 Two doors	8盘 8 plates	150~220人 150 to 220 people
CN-8002-DMG-YTS-3M	988*640*1760	15KW/380V	三门 Three doors	9盘 9 plates	200~300人 200 to 300 people

多门蒸柜

Multi-door steamer

- 多门分层不窜味
Multiple layers without flavor crossover
- 多门独立控制
Multiple doors are independently controlled



/ 电热款 两门
/ Electric heating style two doors



/ 电热款 三门
/ Electric heating style three doors

电热款 Electric heating style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	门数 Number of doors	盘数 Number of plates
CN-8002-ZG-2M	840*640*1665	12KW/380V	两门 Two doors	12盘 12 plates
CN-8002-ZG-3M	840*640*1795	15KW/380V	三门 Three doors	12盘 12 plates

电热款 (304材质) Electric heating style (304 material)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	门数 Number of doors	盘数 Number of plates
CN-8002-ZG304-2M	840*640*1665	12KW/380V	两门 Two doors	12盘 12 plates
CN-8002-ZG304-3M	840*640*1795	15KW/380V	三门 Three doors	12盘 12 plates



/ 燃气款 两门
/ Gas style two doors



/ 燃气款 三门
/ Gas style three doors

燃气款 Gas style

型号 Model	尺寸 Size(mm)	耗气量 Gas consumption	门数 Number of doors	盘数 Number of plates
CN-8002-ZG-RX-2M	840*660*1695	液化气1.5kg/h, 天然气1.8m³/h Liquefied gas: 1.5kg/h, natural gas: 1.8m³/h	两门 Two doors	10盘 10 plates
CN-8002-ZG-RX-3M	840*660*1825	液化气1.5kg/h, 天然气1.8m³/h Liquefied gas: 1.5kg/h, natural gas: 1.8m³/h	三门 Three doors	10盘 10 plates

三门海鲜蒸柜

Three-door seafood steamer

- 三门独控不窜味
Three separate controls without flavor crossover
- 独立蒸汽系统
Independent steam system



标准款 电热 Standard style electric Heating

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage
CN-8010-DHB-3X	900*820*1840	24KW/380V
CN-8010-DHB-3E	1000*820*1840	30KW/380V
CN-8010-DHB-3D	1200*820*1840	36KW/380V

标准款 燃气 Standard style Gas

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage
CN-8010-RHB-3X	900*820*1840	120W/220V
CN-8010-RHB-3E	1000*820*1840	120W/220V
CN-8010-RHB-3D	1200*820*1840	120W/220V



升级款 电热 Upgraded style electric Heating

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage
CN-8009-W-90	900*1000*1890	24KW/380V
CN-8009-W-120	1200*1000*1890	36KW/380V

升级款 燃气 Upgraded style Gas

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage
CN-8009-GT-90	900*1000*1890	150W/220V
CN-8009-GT-120	1200*1000*1890	150W/220V



经济款 电热 Economical style electric Heating

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage
CN-8002-HXD-J3X	1060*830*1830	24KW/380V
CN-8002-HXD-J3D	1260*830*1830	30KW/380V

经济款 燃气 Economical style Gas

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage
CN-8002-HXRX-J-3X	1060*830*1830	50W/220V
CN-8002-HXRX-J-3D	1260*830*1830	60W/220V



实用款 电热 Practical style electric Heating

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage
CN-8002-HXD-S3X	1060*830*1830	18KW/380V
CN-8002-HXD-S3D	1260*830*1830	24KW/380V

实用款 燃气 Practical style Gas

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage
CN-8002-HXRX-S-3X	1060*830*1830	50W/220V
CN-8002-HXRX-S-3D	1260*830*1830	60W/220V



豪华款 电热 Luxurious style electric Heating

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage
CN-8002-HXD-H3X	1060*830*1830	18KW/380V
CN-8002-HXD-H3D	1260*830*1830	24KW/380V

豪华款 燃气 Luxurious style Gas

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage
CN-8002-HXRX-H-3X	1060*830*1830	50W/220V
CN-8002-HXRX-H-3D	1260*830*1830	60W/220V



触屏款 电热 Touch-screen style electric Heating

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage
CN-8010-ZDH-3X	1060*900*1850	30KW/380V
CN-8010-ZDH-3E	1160*900*1850	30KW/380V
CN-8010-ZDH-3D	1360*900*1850	42KW/380V

高原蒸柜

High-altitude steamer

- 40kPa高压力
A high pressure of 40kPa
- 360°立体循环加热
360° three-dimensional circulation heating



/ 电热款 (6-8盘)
/ Electric heating style (6-8 plates)



/ 电热款 (10-12盘)
/ Electric heating style (10-12 plates)



/ 电热款 (20-48盘)
/ Electric heating style (20-48 plates)

电热款 Electric heating style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	盘数 Number of plates
CN-8002-GYJ-6	660*850*1085	8KW/220V	6盘 6 plates
CN-8002-GYJ-6-1	660*850*1085	9KW/380V	6盘 6 plates
CN-8002-GYJ-8	660*850*1245	8KW/220V	8盘 8 plates
CN-8002-GYJ-8-1	660*850*1245	9KW/380V	8盘 8 plates
CN-8002-GYJ-10	660*850*1405	12KW/380V	10盘 10 plates
CN-8002-GYJ-12	660*850*1565	12KW/380V	12盘 12 plates
CN-8002-GYJ-20	1370*850*1400	24KW/380V	20盘 20 plates
CN-8002-GYJ-24	1370*850*1565	24KW/380V	24盘 24 plates
CN-8002-GYJ-40	1770*1040*1460	36KW/380V	40盘 40 plates
CN-8002-GYJ-48	1770*1050*1565	48KW/380V	48盘 48 plates



/ 燃气款 (6-8盘)
/ Gas style (6-8 plates)



/ 燃气款 (10-12盘)
/ Gas style (10-12 plates)



/ 燃气款 (20-48盘)
/ Gas style (20-48 plates)

燃气款 Gas style

型号 Model	尺寸 Size(mm)	耗气量 Gas consumption	盘数 Number of plates
CN-8002-GYRX-6	660*850*1260	液化气: 1.3kg/h, 天然气: 1.7m³/h Liquefied gas: 1.3kg/h, natural gas: 1.7m³/h	6盘 6 plates
CN-8002-GYRX-8	660*850*1420	液化气: 1.3kg/h, 天然气: 1.7m³/h Liquefied gas: 1.3kg/h, natural gas: 1.7m³/h	8盘 8 plates
CN-8002-GYRX-10	660*850*1580	液化气: 1.5kg/h, 天然气: 2.0m³/h Liquefied gas: 1.5kg/h, natural gas: 2.0m³/h	10盘 10 plates
CN-8002-GYRX-12	660*850*1740	液化气: 1.5kg/h, 天然气: 2.0m³/h Liquefied gas: 1.5kg/h, natural gas: 2.0m³/h	12盘 12 plates
CN-8002-GYRX-20	1370*860*1650	液化气: 1.5kg/h, 天然气: 2.0m³/h Liquefied gas: 1.5kg/h, natural gas: 2.0m³/h	20盘 20 plates
CN-8002-GYRX-24	1370*850*1740	液化气: 3.0kg/h, 天然气: 3.9m³/h Liquefied gas: 3.0kg/h, natural gas: 3.9m³/h	24盘 24 plates
CN-8002-GYRX-40	1770*1060*1650	液化气: 3.0kg/h, 天然气: 3.9m³/h Liquefied gas: 3.0kg/h, natural gas: 3.9m³/h	40盘 40 plates
CN-8002-GYRX-48	1770*1060*1740	液化气: 3.0kg/h, 天然气: 3.9m³/h Liquefied gas: 3.0kg/h, natural gas: 3.9m³/h	48盘 48 plates



电热款 0.04兆帕 (6-12盘)
/ Electric heating style 0.04 MPA (6-12 plates)



电热款 0.04兆帕 (20-48盘)
/ Electric heating style 0.04 MPA (20-48 plates)

电热款0.04兆帕 Electric heating model 0.04 MPA

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	盘数 Number of plates
CN-8010-GY6/0.04	670*880*1015	6KW/380V	6盘 6 plates
CN-8010-GY8/0.04	670*880*1175	9KW/380V	8盘 8 plates
CN-8010-GY10/0.04	670*880*1335	12KW/380V	10盘 10 plates
CN-8010-GY12/0.04	670*880*1495	12KW/380V	12盘 12 plates
CN-8010-GY20/0.04	1380*880*1335	24KW/380V	20盘 20 plates
CN-8010-GY24/0.04	1380*880*1495	24KW/380V	24盘 24 plates
CN-8010-GY36/0.04	1780*1080*1255	36KW/380V	36盘 36 plates
CN-8010-GY48/0.04	1780*1080*1495	48KW/380V	48盘 48 plates



电热款 带电箱 (6-8盘)



电热款 带电箱 (10-12盘)



电热款 带电箱 (20-48盘)

/ Electric heating style live box (6-8 plates) / Electric heating style live box (10-12 plates) / Electric heating style live box (20-48 plates)

电热款带电箱 Electric heating style live box

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	盘数 Number of plates
CN-8010-GYD6	750*850*1015	6KW/380V	6盘 6 plates
CN-8010-GYD8	750*850*1175	9KW/380V	8盘 8 plates
CN-8010-GYD10	750*850*1335	12KW/380V	10盘 10 plates
CN-8010-GYD12	750*850*1495	12KW/380V	12盘 12 plates
CN-8010-GYD20	1540*850*1335	24KW/380V	20盘 20 plates
CN-8010-GYD24	1540*850*1495	24KW/380V	24盘 24 plates
CN-8010-GYD36	1940*1050*1255	36KW/380V	36盘 36 plates
CN-8010-GYD48	1940*1050*1495	48KW/380V	48盘 48 plates

推车式蒸柜

Trolley-mounted steamer

- 电热/燃气/外接蒸汽可选
Electric heating, gas, and external steam are available for selection
- 自动补水防干烧
Automatic water replenishment to prevent dry burning



电热款 单门
Electric heating style single door



电热款 双门
Electric heating style double door

电热款 Electric heating style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	门数 Number of doors	盘数 Number of plates
CN-8002-TCG-12D	910*850*1820	12KW/380V	单门 Single door	12盘 12 plates
CN-8002-TCG-24D	1110*1050*1820	24KW/380V	单门 Single door	24盘 24 plates
CN-8002-TCG-30D	1107*1031*1940	30KW/380V	单门 Single door	30盘 30 plates
CN-8002-TCG-48D	2135*1031*1820	24KW*2/380V	双门 Double door	48盘 48 plates



燃气款 单门
Gas style single door



燃气款 双门
Gas style double door

燃气款 Gas style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	耗气量 Gas consumption	门数 Number of doors	盘数 Number of plates
CN-8002-TCG-12R	910*850*1820	0.2KW/220V	液化气: 1.6kg/h, 天然气: 2.0m³/h Liquefied gas: 1.6kg/h, natural gas: 2.0m³/h	单门 Single door	12盘 12 plates
CN-8002-TCG-24R	1110*1050*1820	0.2KW/220V	液化气: 2.8kg/h, 天然气: 3.3m³/h Liquefied gas: 2.8kg/h, natural gas: 3.3m³/h	单门 Single door	24盘 24 plates
CN-8002-TCG-30R	1107*1031*1940	0.2KW/220V	液化气: 3.0kg/h, 天然气: 3.5m³/h Liquefied gas: 2.8kg/h, natural gas: 3.3m³/h	单门 Single door	30盘 30 plates
CN-8002-TCG-48R	2135*1031*1820	0.2KW*2/220V	液化气: 5.6kg/h, 天然气: 6.0m³/h Liquefied gas: 5.6kg/h, natural gas: 6.0m³/h	双门 Double door	48盘 48 plates



/ 大型推车式蒸房 34盘

/ Large wheeled steaming room with 34 plates



/ 大型推车式蒸房 68盘

/ Large wheeled steaming room with 68 plates

大型推车式蒸房 Large wheeled steaming room

型号 Model	尺寸 Size(mm)	电压 Voltage	需蒸汽量 Need to steam	内置推车 Built-in trolley
CN-8002-ZYC-TCG-16	1030*1060*1913	220V	100kg/h	1辆/34盘 1 vehicle /34 plates
CN-8002-ZYC-TCG-19	1870*1088*1913	220V	200kg/h	2辆/68盘 2 vehicle /68 plates



/ 隧道式蒸房

/ Tunnel-type steaming room



/ 单门36盘蒸房

/ Single-door 36-tray steaming room



/ 外接蒸汽型

/ External steam type

隧道式蒸房 Tunnel-type steaming room

型号 Model	尺寸 Size(mm)	电压 Voltage	需蒸汽量 Need to steam	内置推车 Built-in trolley
CN-8002-ZYC-SD-ZF-20	1040*2130*1913	220V	200kg/h	2辆/68盘 2 vehicle /68 plates

单门36盘蒸房 Single-door 36-tray steaming room

型号 Model	尺寸 Size(mm)	电压 Voltage	蒸饭量 Steamed rice quantity	内置推车 Built-in trolley
CN-8009-ZF-36	1120*1450*2200	/	180kg	1辆/36盘 1 vehicle /36 plates

外接蒸汽型 External steam type

型号 Model	尺寸 Size(mm)	外接蒸汽 External steam	蒸饭量 Steamed rice quantity	盘数 Number of plates
CN-8002-TCG-12Z	790*850*1820	20-30kg	50-60kg	12盘 12 plates

多盘蒸饭柜

Multi-plate steaming cabinet

- 快速出蒸汽
Produce steam quickly
- 自动防干烧
Automatic anti-dry burning



经济节能款 (电汽两用) 单门 Economical and energy-saving style single door

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	盘数 Number of plates
CN-8002-J-4	710*645*830	6KW/380V	4盘 4 plates
CN-8002-J-4-220	710*645*830	6KW/220V	4盘 4 plates
CN-8002-J-6	710*645*990	6KW/380V	6盘 6 plates
CN-8002-J-6-220	710*645*990	6KW/220V	6盘 6 plates
CN-8002-J-8	710*645*1150	9KW/380V	8盘 8 plates
CN-8002-J-8-220	710*645*1150	8KW/220V	8盘 8 plates
CN-8002-J-10	710*645*1310	12KW/380V	10盘 10 plates
CN-8002-J-12	710*645*1470	12KW/380V	12盘 12 plates



经济节能款 (电汽两用) 双门 Economical and energy-saving style double door

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	盘数 Number of plates
CN-8002-J-20	1415*645*1310	24KW/380V	20盘 20 plates
CN-8002-J-24	1415*645*1470	24KW/380V	24盘 24 plates
CN-8002-J-40	1415*1045*1310	36KW/380V	40盘 40 plates
CN-8002-J-48	1415*1045*1470	48KW/380V	48盘 48 plates



豪华实用款 (电汽两用) 单门 Luxurious and practical style single door

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	盘数 Number of plates
CN-8002-PH-4	710*645*950	6KW/380V	4盘 4 plates
CN-8002-PH-4-220	710*645*950	6KW/220V	4盘 4 plates
CN-8002-PH-6	710*645*1110	6KW/380V	6盘 6 plates
CN-8002-PH-6-220	710*645*1110	6KW/220V	6盘 6 plates
CN-8002-PH-8	710*645*1270	9KW/380V	8盘 8 plates
CN-8002-PH-8-220	710*645*1270	8KW/220V	8盘 8 plates
CN-8002-PH-10	710*645*1430	12KW/380V	10盘 10 plates
CN-8002-PH-12	710*645*1590	12KW/380V	12盘 12 plates



豪华实用款 (电汽两用) 双门 Luxurious and practical style double door

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	盘数 Number of plates
CN-8002-PH-24	1415*645*1590	24KW/380V	24盘 24 plates
CN-8002-PH-40	1415*1045*1430	36KW/380V	40盘 40 plates
CN-8002-PH-48	1415*1045*1590	48KW/380V	48盘 48 plates



自动变频款 (电汽两用) 单门 Automatic frequency conversion style single door

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	盘数 Number of plates
CN-8002-ZH-4	710*645*950	6KW/380V	4盘 4 plates
CN-8002-ZH-6	710*645*1110	6KW/380V	6盘 6 plates
CN-8002-ZH-6-220	710*645*1110	6KW/220V	6盘 6 plates
CN-8002-ZH-8	710*645*1270	9KW/380V	8盘 8 plates
CN-8002-ZH-8-220	710*645*1270	8KW/220V	8盘 8 plates
CN-8002-ZH-10	710*645*1430	12KW/380V	10盘 10 plates
CN-8002-ZH-12	710*645*1590	12KW/380V	12盘 12 plates



自动变频款 (电汽两用) 双门 Automatic frequency conversion style double door

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	盘数 Number of plates
CN-8002-ZH-24	1415*645*1590	24KW/380V	24盘 24 plates
CN-8002-ZH-40	1415*1045*1430	36KW/380V	40盘 40 plates



燃气款 (直排式) 单门 Gas style (straight line) single door

型号 Model	尺寸 Size(mm)	耗气量 Gas consumption	盘数 Number of plates
CN-8002-RX-6	710*665*1185	液化气: 1.3kg/h, 天然气: 1.7m³/h Liquefied gas: 1.3kg/h, natural gas: 1.7m³/h	6盘 6 plates
CN-8002-RX-8	710*665*1345	液化气: 1.3kg/h, 天然气: 1.7m³/h Liquefied gas: 1.3kg/h, natural gas: 1.7m³/h	8盘 8 plates
CN-8002-RX-10	710*665*1505	液化气: 1.5kg/h, 天然气: 2.0m³/h Liquefied gas: 1.5kg/h, natural gas: 2.0m³/h	10盘 10 plates
CN-8002-RX-12	710*665*1665	液化气: 1.5kg/h, 天然气: 2.0m³/h Liquefied gas: 1.5kg/h, natural gas: 2.0m³/h	12盘 12 plates



燃气款 (直排式) 双门 Gas style (straight line) double door

型号 Model	尺寸 Size(mm)	耗气量 Gas consumption	盘数 Number of plates
CN-8002-RX-20	1415*665*1505	液化气: 3.0kg/h, 天然气: 3.9m³/h Liquefied gas: 3.0kg/h, natural gas: 3.9m³/h	20盘 20 plates
CN-8002-RX-24	1415*665*1665	液化气: 3.0kg/h, 天然气: 3.9m³/h Liquefied gas: 3.0kg/h, natural gas: 3.9m³/h	24盘 24 plates
CN-8002-RX-40	1415*1065*1505	液化气: 3.5kg/h, 天然气: 4.5m³/h Liquefied gas: 3.5kg/h, natural gas: 4.5m³/h	40盘 40 plates
CN-8002-RX-48	1415*1065*1665	液化气: 3.5kg/h, 天然气: 4.5m³/h Liquefied gas: 3.5kg/h, natural gas: 4.5m³/h	48盘 48 plates



智能款 单门 Smart style single door

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	盘数 Number of plates
CN-8009-A-6	720*670*1050	9KW/380V	6盘 6 plates
CN-8009-A-8	720*670*1210	9KW/380V	8盘 8 plates
CN-8009-A-10	720*670*1370	12KW/380V	10盘 10 plates
CN-8009-A-12	720*670*1530	12KW/380V	12盘 12 plates



智能款 双门 Smart style double door

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	盘数 Number of plates
CN-8009-A-24	1470*670*1530	24KW/380V	24盘 24 plates



旋钮款 单门 Knob style single door

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	盘数 Number of plates
CN-8009-BL-6	720*670*1050	9KW/380V	6盘 6 plates
CN-8009-BL-8	720*670*1210	9KW/380V	8盘 8 plates
CN-8009-BL-10	720*670*1370	12KW/380V	10盘 10 plates
CN-8009-BL-12	720*670*1530	12KW/380V	12盘 12 plates



旋钮款 双门 Knob style double door

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	盘数 Number of plates
CN-8009-BL-24	1470*670*1530	24KW/380V	24盘 24 plates



智能变频款 (微排节能) 单门 Intelligent inverter style single door

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	盘数 Number of plates
CN-8010-ZB-6	710*650*1100	9KW/380V	6盘 6 plates
CN-8010-ZB-8	710*650*1260	9KW/380V	8盘 8 plates
CN-8010-ZB-10	710*650*1420	12KW/380V	10盘 10 plates
CN-8010-ZB-12	710*650*1580	12KW/380V	12盘 12 plates



智能变频款 (微排节能) 双门 Intelligent inverter style double door

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	盘数 Number of plates
CN-8010-ZB-24	1435*650*1580	24KW/380V	24盘 24 plates



创业款 单门 Start-up style single door

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	盘数 Number of plates
CN-8155-CY-6P/220	700*610*980	6KW/220V	6盘 6 plates
CN-8155-CY-6P/380	700*610*980	9KW/380V	6盘 6 plates
CN-8155-CY-8P/220	700*610*1150	6KW/220V	8盘 8 plates
CN-8155-CY-8P/380	700*610*1150	9KW/380V	8盘 8 plates
CN-8155-CY-10P/380	700*610*1320	12KW/380V	10盘 10 plates
CN-8155-CY-12P/380	700*610*1490	12KW/380V	12盘 12 plates



创业款 双门 Start-up style double door

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	盘数 Number of plates
CN-8155-CY-24P/380	1366*610*1490	24KW/380V	24盘 24 plates



旋钮定时款 单门 Rotary timer style single door

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	盘数 Number of plates
CN-8155-DS-6P/220	700*610*1115	6KW/220V	6盘 6 plates
CN-8155-DS-6P/380	700*610*1115	9KW/380V	6盘 6 plates
CN-8155-DS-8P/220	700*610*1285	6KW/220V	8盘 8 plates
CN-8155-DS-8P/380	700*610*1285	9KW/380V	8盘 8 plates
CN-8155-DS-10P/380	700*610*1445	12KW/380V	10盘 10 plates
CN-8155-DS-12P/380	700*610*1625	12KW/380V	12盘 12 plates



旋钮定时款 双门 Knob timing style double door

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	盘数 Number of plates
CN-8155-DS-24P/380	1366*610*1625	24KW/380V	24盘 24 plates

商用电饼铛

Commercial electric griddle

- 悬浮双面，均匀加热
Suspension on both sides, uniform heating
- 超温保护，自动断电
Over-temperature protection and automatic power-off



台式机械款
Desktop mechanical style



台式机械款
Desktop mechanical style



连锁款
Chain style

	台式机械款 Desktop mechanical style	台式机械款 Desktop mechanical style	连锁款 Chain style	连锁款 Chain style
型号 Model	CN-DBC-TS-LG-3	CN-DBC-TS-TG-3	CN-DBC-LS-5	CN-DBC-LS-6
尺寸 Size(mm)	480*635*260	480*635*260	650*850*700+150	650*850*700+150
功率 Power	3KW	3KW	5KW	6KW
电压 Voltage	220V	220V	220V/380V	220V/380V
发热盘材质 Hot plate material	38cm铝锅 38cm aluminum pot	38cm铁锅 38cm iron pot	53cm铝锅 53cm aluminum pot	53cm铝锅 53cm aluminum pot
温度范围 Temperature range	0-250°C	0-250°C	0-300°C	0-300°C



/ 工程机械款

/ Construction machinery style



/ 工程机械款

/ Construction machinery style



/ 工程机械柜式款

/ Construction machinery cabinet style



/ 工程机械柜式款

/ Construction machinery cabinet style

	工程机械款 Construction machinery style	工程机械款 Construction machinery style	工程机械柜式款 Construction machinery cabinet style	工程机械柜式款 Construction machinery cabinet style
型号 Model	CN-DBC-GC-LG-5	CN-DBC-GC-TG-5	CN-DBC-GCGS-LG-5	CN-DBC-GCGS-TG-5
尺寸 Size(mm)	700*850*750+170	700*850*750+170	700*850*750+170	700*850*750+170
功率 Power	5KW	5KW	5KW	5KW
电压 Voltage	220V/380V	220V/380V	220V/380V	220V/380V
发热盘材质 Hot plate material	53cm铝锅 53cm aluminum pot	53cm铁锅 53cm iron pot	53cm铝锅 53cm aluminum pot	53cm铁锅 53cm iron pot
温度范围 Temperature range	0-250°C	0-250°C	0-250°C	0-250°C



/ 至尊数显款

/ Supreme digital display style



/ 至尊数显款

/ Supreme digital display style



/ 至尊数显款柜式

/ Supreme Digital display cabinet style



/ 至尊数显款柜式

/ Supreme Digital display cabinet style

	至尊数显款 Supreme digital display style	至尊数显款 Supreme digital display style	至尊数显款柜式 Supreme Digital display cabinet style	至尊数显款柜式 Supreme Digital display cabinet style
型号 Model	CN-DBC-ZZ-LG-5	CN-DBC-ZZ-TG-5	CN-DBC-ZZGS-LG-5	CN-DBC-ZZGS-TG-5
尺寸 Size(mm)	700*850*750+170	700*850*750+170	700*850*750+170	700*850*750+170
功率 Power	5KW	5KW	5KW	5KW
电压 Voltage	220V/380V	220V/380V	220V/380V	220V/380V
发热盘材质 Hot plate material	53cm铝锅 53cm aluminum pot	53cm铁锅 53cm iron pot	53cm铝锅 53cm aluminum pot	53cm铁锅 53cm iron pot
温度范围 Temperature range	0-300°C	0-300°C	0-250°C	0-250°C

智能煎饺机

Intelligent dumpling frying machine

- 智能控温，自动加水
Intelligent temperature control and automatic water addition
- 一体成型煎锅
One-piece formed frying pan



/ 连锁款 单头
/ Chain style Single head



/ 连锁款 双头
/ Chain style Double head



/ 至尊款 单头
/ Supreme style Single head



/ 至尊款 双头
/ Supreme style Double head

连锁款 Chain style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	温度范围 Temperature range	规格 Specification
CN-DTJJJ-JL	300*590*210	3.5KW/220V	0-220°C	单头 Single head
CN-STJJJ-JL	605*590*210	7KW/220V	0-220°C	双头 Double head

至尊款 Supreme style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	温度范围 Temperature range	规格 Specification
CN-JX-PYJ-01	285*625*438	3KW/220V	0-250°C	单头 Single head
CN-JX-PYJ-02	570*596*341	6KW/220V	0-250°C	双头 Double head

智能烤鸭炉

Intelligent roast duck oven

- 微波+热风组合
Microwave + hot air combination
- 一键自动清洗
One-click automatic cleaning



/ 电热款 (KSK-6 / KSK-12)
/ Electric heating style (KSK-6 / KSK-12)



/ 电热款 (KSK-6X)



/ 电热款 (KSK-16)
/ Electric heating style (KSK-16)

电热款 Electric heating style

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	烤制方式 Baking method	温度范围 Temperature range
CN-ZDF-KSK-6	900*700*850	6KW	380V	层架+挂网式烤制 Layer rack + hanging mesh baking	40°C-280°C
CN-ZDF-KSK-6X	900*870*1000	6KW	220V/380V	旋转式烤制 Rotary baking	40°C-280°C
CN-ZDF-KSK-12	1250*840*1050	12KW	380V	挂网式烤制 Grilling with a hanging mesh	40°C-280°C
CN-ZDF-KSK-16	1250*840*1050	16KW	380V	旋转式烤制 Rotary baking	40°C-280°C



燃气款 Gas style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	烤制方式 Baking method	温度范围 Temperature range
CN-ZDF-GC-K15R	1100*900*1670	1KW/220V	旋转式烤制 Rotary baking	40°C-280°C

宴会保温餐车

Banquet insulated dining car

- 热风循环，保温保湿
Hot air circulation for heat preservation and moisture retention
- 11.5cm大层距
11.5cm large layer spacing



双门4层
Two-door 4 layers

单门5层
Single door 5 layers

单门11层
Single door 11 layers

双门22层
Two-door 22 layers

宴会保温餐车 Banquet insulated dining car

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	门数 Number of doors	温度范围 Temperature range
CN-8159-BWC-EWC-4S	1020*660*1150	1.3KW/220V	双门4层 Two-door 4 layers	30~85°C
CN-8159-BWC-DJ-5	730*940*1100	2.7KW/220V	单门5层 Single door 5 layers	30~85°C
CN-8159-BWC-DJ-11	730*940*1765	2.7KW/220V	单门11层 Single door 11 layers	30~85°C
CN-8159-BWC-DJ-22	1400*940*1765	5.4KW/220V	双门22层 Two-door 22 layers	30~85°C



单门11层 (玻璃门)
Single door 11 layers (glass door)



双门22层 (玻璃门)
Two door 22 layers (glass door)

宴会保温餐车 Banquet insulated dining car

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	门数 Number of doors	温度范围 Temperature range
CN-8159-BWC-DJ-11B	730*940*1765	2.7KW/220V	单门11层 (玻璃门) Single door 11 layers (glass door)	30~85°C
CN-8159-BWC-DJ-22B	1400*940*1765	5.4KW/220V	双门22层 (玻璃门) Two-door 22 layers (glass door)	30~85°C

日式烧鸟炉

Japanese-style bird grill

- 油烟净化97%
97% oil fume purification
- CEP环保认证
CEP environmental protection certification



豪华款 Luxurious style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	配置 Configuration
CN-SNL-8032-HH-1000	1000*800*1190	550W/220V	风机 Fan
CN-SNL-8032-HH-1200	1200*800*1190	550W/220V	风机 Fan
CN-SNL-8032-HH-1500	1500*800*1190	550W/220V	风机 Fan

至尊款 Supreme style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	配置 Configuration
CN-SNL-8032-ZH-1000	1000*800*1190	800W/220V	风机+净化器*1 Fan + purifier *1
CN-SNL-8032-ZH-1200	1200*800*1190	800W/220V	风机+净化器*1 Fan + purifier *1
CN-SNL-8032-ZH-1500	1500*800*1190	1.05KW/220V	风机+净化器*2 Fan + purifier *2



旗舰款 Flagship style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	配置 Configuration
CN-SNL-8032-QJ-1000	1000*800*1190	800W/220V	风机+净化器*1+碳烤炉 Fan + purifier *1+ carbon oven
CN-SNL-8032-QJ-1200	1200*800*1190	800W/220V	风机+净化器*1+碳烤炉 Fan + purifier *1+ carbon oven
CN-SNL-8032-QJ-1500	1500*800*1190	1.05KW/220V	风机+净化器*2+碳烤炉 Fan + purifier *2+ carbon oven

智能煮饭机

Intelligent rice cooker

- 36分钟“精煮”米饭
36 minutes of meticulous cooking of rice
- 30L大容量
30L large capacity



/ 1层 1 layer



/ 2层 2 layers



/ 3层 3 layers

智能煮饭机 Intelligent rice cooker

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	层数 Number of layers
CN-8113-ZFG	750*610*500	5KW/380V	1层 1 layer
CN-8113-ZFG-02	750*610*940	5KW*2/380V	2层 2 layers
CN-8113-ZFG-03	750*610*1380	5KW*3/380V	3层 3 layers

蒸汽发生器

Steam generator

- 7公斤压力, 171°C高温蒸汽
7 kilograms of pressure, 171°C high-temperature steam
- 自动补水防干烧
Automatic water replenishment to prevent dry burning



/ 壁挂式燃气款
/ Wall-mounted gas style



/ 立式燃气款
/ Vertical gas style

壁挂式燃气款 Wall-mounted gas style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	耗气量 Gas consumption	蒸发量 Evaporation volume
CN-8002-B-RZQ-50Y	520*420*900	120W/220V	液化气: 2.8kg/h Liquefied gas: 2.8kg/h	53kg/h
CN-8002-B-RZQ-50T	520*420*900	120W/220V	天然气: 3.3m³/h Natural gas: 3.3m³/h	53kg/h
CN-8002-B-RZQ-60Y	580*420*900	120W/220V	液化气: 3.5kg/h Liquefied gas: 3.5kg/h	63kg/h
CN-8002-B-RZQ-60T	580*420*900	120W/220V	天然气: 4.1m³/h Natural gas: 4.1m³/h	63kg/h
CN-8002-B-RZQ-70Y	640*420*900	120W/220V	液化气: 4.2kg/h Liquefied gas: 4.2kg/h	73kg/h
CN-8002-B-RZQ-70T	640*420*900	120W/220V	天然气: 5.0m³/h Natural gas: 5.0m³/h	73kg/h

立式燃气款 Vertical gas style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	耗气量 Gas consumption	蒸发量 Evaporation volume
CN-8002-LH-R-80	740*620*1550	120W/220V	液化气: 4.6kg/h, 天然气: 5.5m³/h Liquefied gas: 4.6kg/h, natural gas: 5.5m³/h	80kg/h



/ 卧式燃气款
/ Horizontal gas style



/ 立式电热款
/ Vertical electric heating style

卧式燃气款 Horizontal gas style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	耗气量 Gas consumption	蒸发量 Evaporation volume
CN-8002-WS-RZQ-80Y	860*530*640	120W/220V	液化气: 4.6kg/h Liquefied gas: 4.6kg/h	73kg/h
CN-8002-WS-RZQ-80T	860*530*640	120W/220V	天然气: 5.5m³/h Natural gas: 5.5m³/h	73kg/h

立式电热款 Vertical electric heating style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	热效率 Thermal efficiency	蒸发量 Evaporation volume
CN-8002-LS-D-72	920*620*1160	72KW/380V	98%	96kg/h

CHINENG AUTOMATION SERIES

驰能 | 自动化系列

自动升降煮面炉·电炸炉·炒菜机·旋转煲仔炉·打饭机

AUTOMATIC LIFTING NOODLE STOVE, ELECTRIC FRYING STOVE,
STIR-FRYING MACHINE, ROTARY POT STOVE, RICE MAKER



自动煮面炉

Automatic noodle cooking stove

- 定时定温
Timed and temperature-controlled
- 3头/6头/9头
3 heads / 6 heads / 9 heads



创业款 3头 Startup style 3 heads

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	粉篱口径 Powder hedge diameter
CN-YDE-IZML-A3F-4.5/220/380-14	315*750*1160	4.5KW	220V/380V	14cm
CN-YDE-IZML-A3F-6/220/380-14	315*750*1160	6KW	220V/380V	14cm



创业款 6头 Startup style 6 heads

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	粉篱口径 Powder hedge diameter
CN-YDE-IZML-A6F2-9/220/380-14	595*750*1160	9KW	220V/380V	14cm
CN-YDE-IZML-A6F2-12/380-14	595*750*1160	12KW	380V	14cm
CN-YDE-IZML-A6F2-9/220/380-16	675*870*1160	9KW	220V/380V	16cm
CN-YDE-IZML-A6F2-12/380-16	675*870*1160	12KW	380V	16cm
CN-YDE-IZML-A6F2-9/220/380-18	675*870*1160	9KW	220V/380V	18cm
CN-YDE-IZML-A6F2-12/380-18	675*870*1160	12KW	380V	18cm



连锁变频款 3头 Interlocking inverter style 3 heads

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	粉篱口径 Powder hedge diameter
CN-YDE-IZML-3G-4.5/220/380-14	315*750*1160	4.5KW	220V/380V	14cm
CN-YDE-IZML-3G-6/220/380-14	315*750*1160	6KW	220V/380V	14cm
CN-YDE-IZML-3G-4.5/220/380-16	355*870*1160	4.5KW	220V/380V	16cm
CN-YDE-IZML-3G-6/220/380-16	355*870*1160	6KW	220V/380V	16cm
CN-YDE-IZML-3G-4.5/220/380-18	355*870*1160	4.5KW	220V/380V	18cm
CN-YDE-IZML-3G-6/220/380-18	355*870*1160	6KW	220V/380V	18cm



连锁变频款 6头 Interlocking inverter style 6 heads

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	粉篱口径 Powder hedge diameter
CN-YDE-IZML-BP6A-9/220/380-14	595*750*1160	9KW	220V/380V	14cm
CN-YDE-IZML-BP6A-12/380-14	595*750*1160	12KW	380V	14cm
CN-YDE-IZML-BP6A-9/220/380-16	675*870*1160	9KW	220V/380V	16cm
CN-YDE-IZML-BP6A-12/380-16	675*870*1160	12KW	380V	16cm
CN-YDE-IZML-BP6A-9/220/380-18	675*870*1160	9KW	220V/380V	18cm
CN-YDE-IZML-BP6A-12/380-18	675*870*1160	12KW	380V	18cm



工程电热款 3头 Engineering electric heating style 3 heads

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	粉篱口径 Powder hedge diameter
CN-YDE-IZML-3SG-4.5/220/380-14	310*750*1160	4.5KW	220V/380V	14cm
CN-YDE-IZML-3SG-6/220/380-14	310*750*1160	6KW	220V/380V	14cm
CN-YDE-IZML-3SG-4.5/220/380-16	350*870*1160	4.5KW	220V/380V	16cm
CN-YDE-IZML-3SG-6/220/380-16	350*870*1160	6KW	220V/380V	16cm
CN-YDE-IZML-3SG-4.5/220/380-18	350*870*1160	4.5KW	220V/380V	18cm
CN-YDE-IZML-3SG-6/220/380-18	350*870*1160	6KW	220V/380V	18cm



工程电热款 6头 Engineering electric heating style 6 heads

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	粉篱口径 Powder hedge diameter
CN-YDE-IZML-6SG2-9/220/380-14	595*750*1160	9KW	220V/380V	14cm
CN-YDE-IZML-6SG2-12/380-14	595*750*1160	12KW	220V/380V	14cm
CN-YDE-IZML-6SG2-9/220/380-16	675*870*1160	9KW	220V/380V	16cm
CN-YDE-IZML-6SG2-12/380-16	675*870*1160	12KW	220V/380V	16cm
CN-YDE-IZML-6SG2-9/220/380-18	675*870*1160	9KW	220V/380V	18cm
CN-YDE-IZML-6SG2-12/380-18	675*870*1160	12KW	220V/380V	18cm



工程电热款 9头 Engineering electric heating style 9 heads

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	粉篱口径 Powder hedge diameter
CN-YDE-IZML-9SG3-13.5/380-14	1040*820*1190	13.5KW	380V	14cm
CN-YDE-IZML-9SG3-18/380-14	1040*820*1190	18KW	380V	14cm
CN-YDE-IZML-9SG3-13.5/380-16	1160*940*1190	13.5KW	380V	16cm
CN-YDE-IZML-9SG3-18/380-16	1160*940*1190	18KW	380V	16cm
CN-YDE-IZML-9SG3-13.5/380-18	1160*940*1190	13.5KW	380V	18cm
CN-YDE-IZML-9SG3-18/380-18	1160*940*1190	18KW	380V	18cm



工程燃气款 3头 Engineering gas style 3 heads

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	粉篱口径 Powder hedge diameter
CN-8024-XKRQ-JZML-3T-14	380*800*1120	120W	220V	14cm
CN-8024-XKRQ-JZML-3T-16	380*800*1120	120W	220V	16cm
CN-8024-XKRQ-JZML-3T-18	380*800*1120	120W	220V	18cm



工程燃气款 6头 Engineering gas style 6 heads

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	粉篱口径 Powder hedge diameter
CN-8024-XKRQ-JZML-6T-14	700*800*1120	240W	220V	14cm
CN-8024-XKRQ-JZML-6T-16	700*800*1120	240W	220V	16cm
CN-8024-XKRO-JZML-6T-18	700*800*1120	240W	220V	18cm



工程燃气款 9头 Engineering gas style 9 heads

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	粉篱口径 Powder hedge diameter
CN-JC-JZML-9-R-14-TT	1150*800*1120	360W	220V	14cm
CN-JC-JZML-9-R-16-TT	1150*800*1120	360W	220V	16cm
CN-JC-JZML-9-R-18-TT	1150*800*1120	360W	220V	18cm



螺蛳粉专用款 6头 Special style for rice noodle soup with snails 6 heads

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	粉篱口径 Powder hedge diameter
CN-JZML-8024-LSF-6-A-9/220-14	550*750*1120	9KW	220V	14cm
CN-JZML-8024-LSF-6-A-9/380-14	550*750*1120	9KW	380V	14cm
CN-JZML-8024-LSF-6-A-12/380-14	550*750*1120	12KW	380V	14cm



重庆小面专用款 6头 Special style for Chongqing noodles 6 heads

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	粉篱口径 Powder hedge diameter
CN-JZML-8024-CQXM-6-A-9/220-14	550*750*1120	9KW	220V	14cm
CN-JZML-8024-CQXM-6-A-9/380-14	550*750*1120	9KW	380V	14cm
CN-JZML-8024-CQXM-6-A-12/380-14	550*750*1120	12KW	380V	14cm



食神款 6头 Food god style 6 heads

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	粉篱口径 Powder hedge diameter
CN-SSZML-8126-6-380-16	650*800*800+296	9KW	380V	16cm



智能款 6头 Intelligent style 6 heads

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	粉篱口径 Powder hedge diameter
CN-SD-6-ZDJML-QP	650*800*800+280	12KW	380V	14/16/18cm

煮面熬汤组合炉

Cooking noodles soup combined furnace

- 煮面+熬汤+调料台
Cooking noodles + stewing soup + seasoning counter
- 平整台面，易清洁
Flat countertop, easy to clean



/ 3头煮面炉+Φ40cm单头汤炉

/ 3 head noodle cooking stove + Φ40cm single head soup stove



/ 3头煮面炉+Φ40cm单头汤炉+3格调料台

/ 3 head noodle stove + Φ40cm single head soup stove + 3 style seasoning table

3头煮面炉+Φ40cm单头汤炉

3 head noodle cooking stove + Φ40cm single head soup stove

3头煮面炉+Φ40cm单头汤炉+3格调料台

3 head noodle stove + Φ40cm single head soup stove + 3 style seasoning table

型号 Model	CN-8125-DCZMZH-340	CN-8125-DCZMZH-340T
尺寸 Size(mm)	800*800*800+120	1000*800*800+120
功率 Power	8KW (煮面炉 Noodle cooking stove) + 5KW (汤炉 Soup stove)	8KW (煮面炉 Noodle cooking stove) + 5KW (汤炉 Soup stove)
电压 Voltage	380V	380V
调料台 Seasoning table	/	3格 3 grids
粉篱口径 Powder hedge diameter	14/16/18cm	14/16/18cm



3头煮面炉+Φ30cm双头汤炉
/ 3 head noodle cooking stove + Φ30cm double head soup stove



3头煮面炉+Φ30cm双头汤炉+3格调料台
/ 3 head noodle stove + Φ30cm double head soup stove + 3 style seasoning table

3头煮面炉+Φ30cm双头汤炉

3 head noodle cooking stove + Φ30cm double head soup stove

3头煮面炉+Φ30cm双头汤炉+3格调料台

3 head noodle stove + Φ30cm double head soup stove + 3 style seasoning table

型号 Model

CN-8125-DCZMZH-332

CN-8125-DCZMZH-332T

尺寸 Size(mm)

1000*800*800+120

1200*800*800+120

功率 Power

8KW (煮面炉 Noodle cooking stove) + 3.5KW*2 (汤炉 Soup stove)

8KW (煮面炉 Noodle cooking stove) + 3.5KW*2 (汤炉 Soup stove)

电压 Voltage

380V

380V

调料台 Seasoning table

/

3格 3 grids

粉篱口径

14/16/18cm

14/16/18cm

Powder hedge diameter



6头煮面炉+Φ30cm双头汤炉
/ 6-head noodle cooking stove + Φ30cm double head soup stove



6头煮面炉+Φ30cm双头汤炉+3格调料台
/ 6 head noodle stove + Φ30cm double head soup stove + 3 style seasoning table

6头煮面炉+Φ30cm双头汤炉

6-head noodle cooking stove + Φ30cm double head soup stove

6头煮面炉+Φ30cm双头汤炉+3格调料台

6 head noodle stove + Φ30cm double head soup stove + 3 style seasoning table

型号 Model

CN-8125-DCZMZH-632

CN-8125-DCZMZH-632T

尺寸 Size(mm)

1250*800*800+120

1400*800*800+120

功率 Power

15KW (煮面炉 Noodle cooking stove) + 3.5KW*2 (汤炉 Soup stove)

15KW (煮面炉 Noodle cooking stove) + 3.5KW*2 (汤炉 Soup stove)

电压 Voltage

380V

380V

调料台 Seasoning table

/

3格 3 grids

粉篱口径

14/16/18cm

14/16/18cm

Powder hedge diameter

商用电炸炉

Commercial electric fryer

- 记忆菜单，一键油炸
Memory menu, one-click frying
- 智能恒温，超温保护
Intelligent constant temperature, over temperature protection



单缸双筛 Single cylinder with double screen

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	油缸容量 Cylinder capacity	温度范围 Temperature range
CN-YDE-IDZL-9/220-1C-JJ	400*730*1100	9KW/220V	33L	常温 Normal temperature~180°C
CN-YDE-IDZL-9/380-1C-JJ	400*730*1100	9KW/380V	33L	常温 Normal temperature~180°C
CN-YDE-IDZL-18/380-1C-JJ	400*730*1100	18KW/380V	33L	常温 Normal temperature~180°C



双缸双筛 Double cylinder with double screen

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	油缸容量 Cylinder capacity	温度范围 Temperature range
CN-YDE-IDZL-9/220-2C-JJ	400*730*1100	9KW/220V	16L*2	常温 Normal temperature~180°C
CN-YDE-IDZL-9/380-2C-JJ	400*730*1100	9KW/380V	16L*2	常温 Normal temperature~180°C
CN-YDE-IDZL-18/380-2C-JJ	400*730*1100	18KW/380V	16L*2	常温 Normal temperature~180°C



单缸双筛 带滤油车 Single cylinder with double screen Belt oil filter car

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	油缸容量 Cylinder capacity	温度范围 Temperature range
CN-YDE-IDZL-9/220-1BT-TST	440*770*1120	9KW/220V	33L	常温 Normal temperature~180°C
CN-YDE-IDZL-9/380-1BT-TST	440*770*1120	9KW/380V	33L	常温 Normal temperature~180°C
CN-YDE-IDZL-18/380-1BT-TST	440*770*1120	18KW/380V	33L	常温 Normal temperature~180°C



双缸双筛 带滤油车 Double cylinder with double screen Belt oil filter car

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	油缸容量 Cylinder capacity	温度范围 Temperature range
CN-YDE-IDZL-9/220-2BT-TST	440*770*1120	9KW/220V	16L*2	常温 Normal temperature~180°C
CN-YDE-IDZL-9/380-2BT-TST	440*770*1120	9KW/380V	16L*2	常温 Normal temperature~180°C
CN-YDE-IDZL-18/380-2BT-TST	440*770*1120	18KW/380V	16L*2	常温 Normal temperature~180°C



单缸双筛 自动升降 Single cylinder with double screen Automatic lifting

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	油缸容量 Cylinder capacity	温度范围 Temperature range
CN-YDE-IDZL-9/220-1B-ZD	400*770*1320	9KW/220V	33L	常温 Normal temperature~180°C
CN-YDE-IDZL-9/380-1B-ZD	400*770*1320	9KW/380V	33L	常温 Normal temperature~180°C
CN-YDE-IDZL-18/380-1B-ZD	400*770*1320	18KW/380V	33L	常温 Normal temperature~180°C



双缸双筛 自动升降 Double cylinder with double screen Automatic lifting

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	油缸容量 Cylinder capacity	温度范围 Temperature range
CN-YDE-IDZL-9/220-2B-ZD	400*770*1320	9KW/220V	16L*2	常温 Normal temperature~180°C
CN-YDE-IDZL-9/380-2B-ZD	400*770*1320	9KW/380V	16L*2	常温 Normal temperature~180°C
CN-YDE-IDZL-18/380-2B-ZD	400*770*1320	18KW/380V	16L*2	常温 Normal temperature~180°C



单缸双筛 自动升降+带滤油车 Single cylinder with double screen Automatic lifting + Belt oil filter car

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	油缸容量 Cylinder capacity	温度范围 Temperature range
CN-YDE-IDZL-9/220-1BT-ZD	400*770*1320	9KW/220V	33L	常温 Normal temperature~180°C
CN-YDE-IDZL-9/380-1BT-ZD	400*770*1320	9KW/380V	33L	常温 Normal temperature~180°C
CN-YDE-IDZL-18/380-1BT-ZD	400*770*1320	18KW/380V	33L	常温 Normal temperature~180°C



双缸双筛 自动升降+带滤油车 Double cylinder with double screen Automatic lifting + Belt oil filter car

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	油缸容量 Cylinder capacity	温度范围 Temperature range
CN-YDE-IDZL-9/220-2BT-ZD	400*770*1320	9KW/220V	16L*2	常温 Normal temperature~180°C
CN-YDE-IDZL-9/380-2BT-ZD	400*770*1320	9KW/380V	16L*2	常温 Normal temperature~180°C
CN-YDE-IDZL-18/380-2BT-ZD	400*770*1320	18KW/380V	16L*2	常温 Normal temperature~180°C



单缸双筛 机械版 Single cylinder with double screen Mechanical type

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	油缸容量 Cylinder capacity	温度范围 Temperature range
CN-YDE-IDZL-9/220-1M-CN	400*770*1120	9KW/220V	33L	常温 Normal temperature~180°C
CN-YDE-IDZL-9/380-1M-CN	400*770*1120	9KW/380V	33L	常温 Normal temperature~180°C



双缸炸串炉 Double cylinder skewer frying oven

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	油缸容量 Cylinder capacity	温度范围 Temperature range
CN-YDE-IDZL-7-2C-KF	800*650*1025	7KW/220V	18L*2	常温 Normal temperature~180°C



单缸双筛 自动升降 (电磁款) Single cylinder with double screen Automatic lifting (electromagnetic model)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	油缸容量 Cylinder capacity	温度范围 Temperature range
CN-SD-DCZL-10-1S/380	500*800*1130	10KW/380V	27L	常温 Normal temperature~230°C



单缸裹粉台 Single cylinder powder coating table

型号 Model	尺寸 Size(mm)	材质 Material
CN-YDE-IGFTC-1-95-TST	950*765*800+280	国标不锈钢 National standard stainless steel



一体油泵滤油车 Integrated oil pump oil filter vehicle

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	材质 Material
CN-YDE-ILYC-1-TST	445*810*515+375	0.37KW/220V	不锈钢 Stainless steel



腌制机 机械版 Marinating machine Mechanical type

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	材质 Material
CN-YDE-IYZJ-25M-TST	883*462*946	0.2KW/220V	25kg	不锈钢 Stainless steel



台式单缸 自动升降 Desktop single cylinder Automatic lifting

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	油缸容量 Cylinder capacity	温度范围 Temperature range
CN-JC-JDZL-T-14L	300*550*530	3.5KW/220V	14L	常温 Normal temperature~200°C



台式双缸 自动升降 Desktop double cylinder Automatic lifting

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	油缸容量 Cylinder capacity	温度范围 Temperature range
CN-JC-JDSGZL-T-14L	600*550*530	7KW/220V	14L*2	常温 Normal temperature~200°C



台式单缸 (独立油缸) Desktop single cylinder (independent oil cylinder)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	油缸容量 Cylinder capacity	温度范围 Temperature range
CN-8159-ZL-6L-1	290*455*285	3KW/220V	6L	常温 Normal temperature~200°C
CN-8159-ZL-8L-1	290*455*335	3KW/220V	8L	常温 Normal temperature~200°C



台式单缸 (一体油缸) Desktop single cylinder (integrated oil cylinder)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	油缸容量 Cylinder capacity	温度范围 Temperature range
CN-8159-ZL-101V	280*500*350	3KW/220V	10L	常温 Normal temperature~200°C
CN-8159-ZL-131V	310*510*370	4.5KW/220V	13L	常温 Normal temperature~200°C
CN-8159-ZL-171V	320*530*360	4.5KW/220V	17L	常温 Normal temperature~200°C



台式双缸 (一体油缸) Desktop double cylinder (integrated oil cylinder)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	油缸容量 Cylinder capacity	温度范围 Temperature range
CN-8159-ZL-102V	570*500*350	3KW+3KW/220V	10L+10L	常温 Normal temperature~200°C
CN-8159-ZL-132V	630*510*370	4.5KW+4.5KW/220V	13L+13L	常温 Normal temperature~200°C
CN-8159-ZL-172V	650*530*360	4.5KW+4.5KW/220V	17L+17L	常温 Normal temperature~200°C



台式单缸 (一体油缸) Desktop single cylinder (integrated oil cylinder)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	油缸容量 Cylinder capacity	温度范围 Temperature range
CN-8159-ZL-201V	590*470*350	4.8KW/220V	20L	常温 Normal temperature~200°C
CN-8159-ZL-301V	600*590*400	6KW/220V	30L	常温 Normal temperature~200°C

小型自动炒菜机

Small automatic cooking machine

- 家商两用，节省人工
It can be used for both home and business, saving labor
- 简单高效，标准出餐
Simple and efficient, standard meal preparation



6L

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	温度范围 Temperature range
CN-XCYD-X5-34	400*380*460	3400W/220V	6L	60°C~240°C



6L

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	温度范围 Temperature range
CN-XCYD-GT5-32	400*380*460	3200W/220V	6L	150°C~230°C



9L

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	温度范围 Temperature range
CN-XCYD-X9-32	424*380*396	3200W/220V	9L	150°C~230°C

台式自动炒菜机

Desktop automatic cooking machine

- 1人轻松操作3-5台
One person can easily operate 3 to 5 units
- 3分钟快速出锅
3 minutes for quick cooking



简易款 Simple style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	锅径 Pot diameter(mm)
CN-8130-DC-JY260	445*490*640	3.5KW/220V	6.4L	φ260



电磁款 Electromagnetic style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	锅径 Pot diameter(mm)
CN-8130-DC-TS260	400*600*800	5KW/220V	6.4L	φ260
CN-8130-DC-TS300	460*600*800	5KW/220V	9.3L	φ300
CN-8130-DC-TS360	520*700*870	8KW/380V	15L	φ360



燃气款 Gas style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	锅径 Pot diameter(mm)
CN-8130-RQ-TS260	430*600*750	100W/220V	6.4L	φ260
CN-8130-RQ-TS300	470*600*810	100W/220V	9.3L	φ300
CN-8130-RQ-TS360	540*770*840	100W/220V	15L	φ360



电磁款 带水槽 Electromagnetic style with sink

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	锅径 Pot diameter(mm)
CN-8130-DC-TS300SC	520*770*780	5KW/220V	9.3L	φ300
CN-8130-DC-TS360SC	580*770*860	8KW/380V	15L	φ360



燃气款 带水槽 Gas style with sink

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	锅径 Pot diameter(mm)
CN-8130-RQ-TS300SC	520*770*780	100W/220V	9.3L	φ300
CN-8130-RQ-TS360SC	580*770*860	100W/220V	15L	φ360



电磁款 带工作台 Electromagnetic style with workbench

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	锅径 Pot diameter(mm)
CN-8130-DC-GS260	510*800*1350	5KW/220V	6.4L	φ260
CN-8130-DC-GS300	550*800*1350	5KW/220V	9.3L	φ300
CN-8130-DC-GS360	610*900*1420	8KW/380V	15L	φ360



燃气款 带工作台 Gas style with workbench

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	锅径 Pot diameter(mm)
CN-8130-RQ-GS260	510*800*1350	100W/220V	6.4L	φ260
CN-8130-RQ-GS300	550*800*1350	100W/220V	9.3L	φ300
CN-8130-RQ-GS360	610*900*1420	100W/220V	15L	φ360



电磁款 双头 带工作台 Electromagnetic style double-headband workbench

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	锅径 Pot diameter(mm)
CN-8130-DC-GS260-2	1020*800*1350	5KW*2/220V	6.4L*2	φ260mm*2
CN-8130-DC-GS300-2	1100*800*1350	5KW*2/220V	9.3L*2	φ300mm*2
CN-8130-DC-GS360-2	1220*900*1420	8KW*2/380V	15L*2	φ360mm*2



电磁款 三头 带工作台 Electromagnetic style three-headband workbench

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	锅径 Pot diameter(mm)
CN-8130-DC-GS260-3	1530*800*1350	5KW*3/220V	6.4L*3	φ260mm*3
CN-8130-DC-GS300-3	1650*800*1350	5KW*3/220V	9.3L*3	φ300mm*3
CN-8130-DC-GS360-3	1830*900*1420	8KW*3/380V	15L*3	φ360mm*3



熟铁锅炒菜机
手动款

/ Boiled iron wok stir-fry machine manual style



熟铁锅炒菜机
电动款

/ Boiled iron wok stir-fry machine electric style



熟铁锅炒菜机
手动款 (带工作台)

/ Boiled iron wok stir-fry machine manual style (with workbench)



熟铁锅炒菜机
电动款 (带工作台)

/ Boiled iron wok stir-fry machine electric style (with workbench)

熟铁锅炒菜机 Boiled iron wok stir-fry machine

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	锅径 Pot diameter(mm)
CN-SD-G30D1-STG-S	470*690*700	5KW/220V	6L	Φ300
CN-SD-G30D1-STG-D	470*690*700	5KW/220V	6L	Φ300

熟铁锅炒菜机 (带工作台) Boiled iron wok stir-fry machine (with workbench)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	锅径 Pot diameter(mm)
CN-SD-G30DA-STG-S	550*800*1350	5KW/220V	6L	Φ300
CN-SD-G30DA-STG-D	550*800*1350	5KW/220V	6L	Φ300



台式智能电磁炒菜机手动款

/ Desktop intelligent electromagnetic frying machine manual style



台式智能电磁炒菜机电动款

/ Desktop intelligent electromagnetic frying machine electric style

手动款 Manual style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	锅径 Pot diameter(mm)
CN-MLD-TGS30-S	630*500*550	5KW/220V	6L	Φ300

电动款 Electric style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	锅径 Pot diameter(mm)
CN-MLD-TGD30-D	580*500*550	5KW/220V	6L	Φ300
CN-MLD-TGD36-D	640*560*710	5KW/220V	12L	Φ360



/ 台式智能电磁炒菜机触屏款

/ Desktop intelligent electromagnetic cooking machine with touch screen style

触屏款 Touch screen style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	锅径 Pot diameter(mm)
CN-MLD-TGQ30J-CP	610*500*550	5KW/220V	6L	Φ300
CN-MLD-TGQ36J-CP	670*560*710	5KW/220V	12L	Φ360
CN-MLD-TGQ36J/9-CP	720*600*710	9KW/380V	12L	Φ360



/ 台式智能电磁炒菜机触屏款 (自动喷料)

/ Desktop intelligent electromagnetic cooking machine touch screen style (automatic spraying)



/ 台式智能电磁炒菜机触屏款 (自动喷料)

/ Desktop intelligent electromagnetic cooking machine touch screen style (automatic spraying)

触屏款 Touch screen style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	锅径 Pot diameter(mm)
CN-MLD-TGQ30-CPPL	750*720*700	5KW/220V	6L	Φ300
CN-MLD-TGQ40-CPPL	800*820*800	12KW/380V	12L	Φ400

立式自动炒菜机

Vertical automatic cooking machine

- 360°自动翻炒，高效出餐
360° automatic stir-frying for efficient meal preparation
- 食堂/餐厅/中央厨房
Cafeteria/restaurant/central kitchen



/ 行星搅拌全自动智能炒菜机（手动倒菜）
/ Planetary stirring fully automatic intelligent cooking machine (Manual food pouring)



/ 行星搅拌全自动智能炒菜机（自动倒菜）
/ Planetary stirring fully automatic intelligent cooking machine (Automatic food pouring)

行星搅拌全自动智能炒菜机（手动倒菜） Planetary stirring fully automatic intelligent cooking machine (Manual food pouring)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	单次出餐 Single serving	锅径 Pot diameter(mm)
CN-8130-ICCJ-S40	720*800*1470	8KW/380V	3kg	Φ400

行星搅拌全自动智能炒菜机（自动倒菜） Planetary stirring fully automatic intelligent cooking machine (Automatic food pouring)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	单次出餐 Single serving	锅径 Pot diameter(mm)
CN-8130-ICCJ-Z40	720*800*1400	8KW/380V	3kg	Φ400



/ 全自动小炒炒菜机(自动投料+喷料)
/ Fully automatic stir-frying machine (Automatic feeding + Spraying)



/ 立式智能电磁炒菜机触屏款（自动摆臂喷料）
/ Vertical intelligent electromagnetic cooking machine touch screen (Automatic swing arm spray)

全自动小炒炒菜机（自动投料+喷料） Fully automatic stir-frying machine (Automatic feeding + Spraying)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	锅径 Pot diameter(mm)
CN-8023-DLB-BQ40T-TL+PL	800*(800+200)*(1350/1460)	8-12KW/380V	16L	Φ400

触屏款（自动摆臂喷料） Touch screen model (Automatic swing arm spraying)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	锅径 Pot diameter(mm)
CN-MLD-GQ50-CPPL	900*(1120+250)*(1175/1380)	20KW/380V	18L	Φ500
CN-MLD-GQ60-CPPL	1000*(1170+410)*(1250/1550)	25KW/380V	24L	Φ600



/ 智能-座地式电磁炒菜机
/ Intelligent - Floor-standing electromagnetic cooking machine

座地式电磁炒菜机 Floor-standing electromagnetic cooking machine

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产能 Production capacity	锅径 Pot diameter(mm)
CN-MLD-GB60-CPDD	1300*(1020/1320)*(1300/1650)	25KW/380V	20kg	Φ600
CN-MLD-GB70-CPDD	1400*(1120/1420)*(1400/1750)	30KW/380V	30kg	Φ700
CN-MLD-GB80-CPDD	1500*(1220/1520)*(1500/1850)	35KW/380V	50kg	Φ800
CN-MLD-GB90-CPDD	1600*(1350/1650)*(1700/1950)	40KW/380V	80kg	Φ900

座地式电磁炒菜机 (菜谱储存+语音播报) Floor-standing electromagnetic cooking machine (Recipe storage + Voice broadcast)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产能 Production capacity	锅径 Pot diameter(mm)
CN-MLD-GC60-CPYYCD	1300*(1020/1320)*(1300/1650)	25KW/380V	20kg	Φ600
CN-MLD-GC70-CPYYCD	1400*(1120/1420)*(1400/1750)	30KW/380V	30kg	Φ700
CN-MLD-GC80-CPYYCD	1500*(1220/1520)*(1500/1850)	35KW/380V	50kg	Φ800
CN-MLD-GC90-CPYYCD	1600*(1350/1650)*(1700/1950)	40KW/380V	80kg	Φ900



/ 座地式滚筒炒菜机 三代
/ Third-generation floor-standing drum cooking machine



/ 座地式滚筒炒菜机 四代
/ Fourth-generation floor-standing drum stir-frying machine

座地式滚筒炒菜机 三代 Third-generation floor-standing drum cooking machine

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产能 Production capacity	锅径 Pot diameter(mm)
CRC-CCJ15-1	1420*1100*1400	20KW/380V	20kg	Φ600
CRC-CCJ20-1	1520*1100*1550	30KW/380V	30kg	Φ700

座地式滚筒炒菜机 四代 Fourth-generation floor-standing drum stir-frying machine

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产能 Production capacity	锅径 Pot diameter(mm)
CRC-CCJ15-1-FB001	1420*1100*1400	20KW/380V	20kg	Φ600
CRC-CCJ20-1-FB001	1520*1100*1550	30KW/380V	30kg	Φ700



座地式滚筒炒菜机 五代
/ Fifth-generation floor-standing drum stir-frying machine




多功能自动搅拌炒锅/炖烩机
/ Multi-functional automatic stirring wok / stewing machine

座地式滚筒炒菜机 五代 Fifth-generation floor-standing drum stir-frying machine

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产能 Production capacity	锅径 Pot diameter(mm)
CRC-CCJ15-2	1420*1100*1400	20KW/380V	20kg	Φ600
CRC-CCJ20-2	1520*1100*1550	30KW/380V	30kg	Φ700

多功能自动搅拌炒锅/炖烩机 Multi-functional automatic stirring wok / stewing machine

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产能 Production capacity	锅径 Pot diameter(mm)
CN-MLD-XC80-ZDJB-CPDD	1500*1100*(1480/1600)	(20/25KW)/380V	150kg	Φ800*H400
CN-MLD-XC100-ZDJB-CPDD	1810*1400*2000	(30/40KW)/380V	200kg	Φ1000*H500
CN-MLD-XC120-ZDJB-CPDD	2020*1600*2000	(45/60KW)/380V	400kg	Φ1200*H600

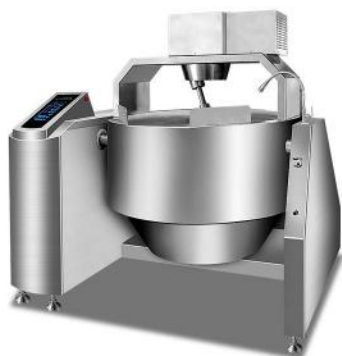

多功能自动搅拌炒锅/炖烩机
/ Multi-functional automatic stirring wok / stewing machine



多功能自动搅拌炒锅/炖烩机
/ Multi-functional automatic stirring wok / stewing machine

多功能自动搅拌炒锅/炖烩机 Multi-functional automatic stirring wok / stewing machine

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产能 Production capacity	锅径 Pot diameter(mm)
CN-MLD-QXC80-ZDJB-CPPL	1500*1100*(1480/1600)	(20/25)KW/380V	100kg	Φ800*H400
CN-MLD-QXC100-ZDJB-CPPL	1810*1400*2000	(30/40)KW/380V	200kg	Φ1000*H500
CN-MLD-QXC120-ZDJB-CPPL	2020*1600*2000	(45/60)KW/380V	400kg	Φ1200*H600

多功能自动搅拌砂锅/炖烩机 Multi-functional automatic stirring wok / stewing machine

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产能 Production capacity	锅径 Pot diameter(mm)
CRC-ZNCCJ-600	1690*1270*1750	12KW/380V	24kg	Φ600
CRC-ZNCCJ-700	1790*1330*1750	15KW/380V	39kg	Φ700
CRC-ZNCCJ-800	1890*1430*1750	20KW/380V	61kg	Φ800
CRC-ZNCCJ-900	1990*1530*1750	25KW/380V	82kg	Φ900
CRC-ZNCCJ-1000	2090*1630*1750	30KW/380V	108kg	Φ1000

自动打饭机

Automatic rice serving machine

- 干净卫生，吃得放心
Clean and hygienic, eat at ease
- 3小时长效保温
3-hour long-lasting heat preservation



连锁款 台式
Chain style desktop



食堂款 立式 定量
Canteen style vertical quantitative



食堂款 立式 变量
Canteen style vertical variable

连锁款 台式 Chain style desktop

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	饭仓容量 Rice bin capacity	供餐人数 Number of persons served
CN-8100-TS01-DFJ	530*400*630	340W/220V	12kg	40-60

食堂款 立式 Canteen style vertical

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	饭仓容量 Rice bin capacity	供餐人数 Number of persons served
CN-8100-LS01-DFJ	750*700*2035	350W/220V	60kg	200-300
CN-8100-LS03-DFJ	750*700*2035	550W/220V	60kg	200-300



智慧食堂款 立式 定量
Smart canteen style vertical quantitative



智慧食堂款 立式 变量
Smart canteen style vertical variable

智慧食堂款 立式 Smart canteen style vertical

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	饭仓容量 Rice bin capacity	供餐人数 Number of persons served
CN-8100-LS02-DFJ	750*700*2035	450W/220V	60kg	200-300
CN-8100-LS04-DFJ	750*700*2035	650W/220V	60kg	200-300



央厨智能分饭机 Central kitchen intelligent rice dispenser

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	出饭效率 Meal preparation efficiency	饭仓容量 Rice bin capacity
CN-8100-Y1680-2-FFJ	1680*1480*2050	2500W/220V	3000-3600/h	80kg



立式打饭机升降车 Vertical rice serving machine lift truck

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	饭仓容量 Rice bin capacity
CN-8100-SJ2000-SJC	1030*555*2000	2500W/220V	200kg

CHINENG REFRIGERATION SERIES

驰能 | 制冷系列

晾胚柜·熟成柜·速冻柜·插盘柜·片冰机·雪花冰机

DRYING GERM CABINET, MATURING CABINET, QUICK-FREEZE CABINET,
INSERT TRAY CABINET, SHEET ICE MACHINE, SNOW ICE MACHINE



智能风干晾胚柜

Intelligent air-drying and embryo drying cabinet

- 冷热循环, 24小时定时
Hot and cold cycle, 24 hours timing
- UVC紫外线消毒
UVC ultraviolet disinfection



/ 豪华款 单门
/ Luxurious style single door



/ 豪华款 双门
/ Luxurious style double door



/ 豪华款 三门
/ Luxurious style triple door

	豪华款 单门 Luxurious style single door	豪华款 双门 Luxurious style double door	豪华款 三门 Luxurious style triple door
型号 Model	CN-LPG-8003-DM-CTB	CN-LPG-8003-SM-CTB	CN-LPG-8003-TM-CTB
尺寸 Size(mm)	620*680*2150	1260*680*2150	1860*680*2150
功率/电压 Power/Voltage	1210W/220V	1480W/220V	2590W/220V
温度区间 Temperature range	0°C~48°C	0°C~48°C	0°C~48°C
湿度区间 Humidity range	RH30%~90%	RH30%~90%	RH30%~90%



/ 负压连锁款 单门
/ Negative pressure interlocking style
single door



/ 负压连锁款 双门
/ Negative pressure interlocking style
double door



/ 负压连锁款 三门
/ Negative pressure interlocking style
triple door

	负压连锁款 单门 Negative pressure interlocking style single door	负压连锁款 双门 Negative pressure interlocking style double door	负压连锁款 三门 Negative pressure interlocking style triple door
型号 Model	CN-LPG-8003-1.25KW-LSFY-DM	CN-LPG-8003-1.56KW-LSFY-SM	CN-LPG-8003-2.71KW-LSFY-TM
尺寸 Size(mm)	700*710*2150	1260*710*2150	1860*710*2150
功率/电压 Power/Voltage	1250W/220V	1560W/220V	2710W/220V
温度区间 Temperature range	0°C~48°C	0°C~48°C	0°C~48°C
湿度区间 Humidity range	RH30%~90%	RH30%~90%	RH30%~90%



/ 连锁升级款 单门
 / Chain upgrade style single door



/ 连锁升级款 双门
 / Chain upgrade style double door



/ 连锁升级款 三门
 / Chain upgrade style triple door

	连锁升级款 单门 Chain upgrade style single door	连锁升级款 双门 Chain upgrade style double door	连锁升级款 三门 Chain upgrade style triple door
型号 Model	CN-LPG-8003-DM-700FA	CN-LPG-8003-SM-1260FA	CN-LPG-8003-TM-1860FA
尺寸 Size(mm)	700*760*2150	1260*760*2150	1860*760*2150
功率/电压 Power/Voltage	1350W/220V	1730W/220V	2870W/220V
温度区间 Temperature range	2°C~20°C	2°C~20°C	2°C~20°C
湿度区间 Humidity range	RH30%~90%	RH30%~90%	RH30%~90%



/ 负压至尊款 单门
 / Negative pressure supreme style single door



/ 负压至尊款 双门
 / Negative pressure supreme style double door



/ 负压至尊款 三门
 / Negative pressure supreme style triple door

	负压至尊款 单门 Negative pressure supreme style single door	负压至尊款 双门 Negative pressure supreme style double door	负压至尊款 三门 Negative pressure supreme style triple door
型号 Model	CN-LPG-8003-ZZFY-700FA	CN-LPG-8003-ZZFY-1260FA	CN-LPG-8003-ZZFY-1860FA
尺寸 Size(mm)	700*800*2150	1260*800*2150	1860*800*2150
功率/电压 Power/Voltage	1350W/220V	1730W/220V	2870W/220V
温度区间 Temperature range	0°C~48°C	0°C~48°C	0°C~48°C
湿度区间 Humidity range	RH30%~90%	RH30%~90%	RH30%~90%



负压旗舰款 单门
Negative pressure flagship style
single door



负压旗舰款 双门
Negative pressure flagship style
double door



负压旗舰款 三门
Negative pressure flagship style
triple door

	负压旗舰款 单门 Negative pressure flagship style single door	负压旗舰款 双门 Negative pressure flagship style double door	负压旗舰款 三门 Negative pressure flagship style triple door
型号 Model	CN-LPG-8003-1.385KW-QJFY-DM	CN-LPG-8003-1.765KW-QJFY-SM	CN-LPG-8003-2.905KW-QJFY-TM
尺寸 Size(mm)	700*795*2150	1400*795*2150	2100*795*2150
功率/电压 Power/Voltage	1385W/220V	1765W/220V	2905W/220V
温度区间 Temperature range	0°C~48°C	0°C~48°C	0°C~48°C
湿度区间 Humidity range	RH30%~90%	RH30%~90%	RH30%~90%

干湿两用熟成柜

Dry and wet dual-purpose aging cabinet

■ 干式熟成/湿式熟成
Dry aging/Wet aging

■ UVC紫外线消毒
UVC ultraviolet disinfection



连锁款 3层
Chain style 3 layers



连锁款 4层
Chain style 4 layers



连锁款 5层
Chain style 5 layers

	连锁款 3层 Chain style 3 layers	连锁款 4层 Chain style 4 layers	连锁款 5层 Chain style 5 layers
型号 Model	CN-GY-DAB-130L	CN-GY-DAB-210L	CN-GY-DAB-330L
尺寸 Size(mm)	610*610*900	610*610*1250	610*610*1750
功率/电压 Power/Voltage	285W/220V	335W/220V	385W/220V
温度区间 Temperature range	-2°C~+4°C	-2°C~+4°C	-2°C~+4°C
湿度区间 Humidity range	RH65%~85%	RH65%~85%	RH65%~85%



豪华款 单门
/ Luxurious style single door



豪华款 双门
/ Luxurious style double door



豪华款 三门
/ Luxurious style triple door

	豪华款 单门 Luxurious style single door	豪华款 双门 Luxurious style double door	豪华款 三门 Luxurious style triple door
型号 Model	CN-GY-DAB-610	CN-GY-DAB-1260	CN-GY-DAB-1830
尺寸 Size(mm)	610*700*2130	1260*700*2130	1830*700*2130
功率/电压 Power/Voltage	285W/220V	380W/220V	760W/220V
温度区间 Temperature range	-2°C~+4°C	-2°C~+4°C	-2°C~+4°C
湿度区间 Humidity range	RH65%~85%	RH65%~85%	RH65%~85%



旗舰款 单门
/ Flagship style single door



旗舰款 双门
/ Flagship style double door



旗舰款 三门
/ Flagship style triple door

	旗舰款 单门 Flagship style single door	旗舰款 双门 Flagship style double door	旗舰款 三门 Flagship style triple door
型号 Model	CN-BX-BSC700	CN-BX-BSC1200	CN-BX-BSC1800
尺寸 Size(mm)	700*750*2000	1200*750*2000	1800*750*2000
功率/电压 Power/Voltage	580W/220V	780W/220V	1080W/220V
温度区间 Temperature range	-2°C~+4°C	-2°C~+4°C	-2°C~+4°C
湿度区间 Humidity range	RH65%~85%	RH65%~85%	RH65%~85%

烘焙插盘柜

Baking tray cabinet

- 360°风冷无霜
360° air-cooled frost-free
- 智能温控
Intelligent temperature control



烘焙插盘柜 2门
Baking tray cabinet 2 doors

烘焙插盘柜 2门 Baking tray cabinet 2 doors

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	温度范围 Temperature range	插盘数量 Number of plug-in discs
CN-CPG-8013-0.5L2F-H16	620*830*1980	460W/220V	-16°C~-25°C	16盘 16 plates



烘焙插盘柜 4门
Baking tray cabinet 4 doors

烘焙插盘柜 4门 Baking tray cabinet 4 doors

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	温度范围 Temperature range	插盘数量 Number of plug-in discs
CN-CPG-8013-1.0L4F-H32	1080*800*1980	750W/220V	-16°C~-25°C	32盘 32 plates

风冷立式冷柜

Air-cooled vertical freezer

- 智能温控，风冷无霜
Intelligent temperature control, air-cooled frost-free
- 品牌压缩机，全铜管制冷
Brand compressor, all-copper tube refrigeration



/ 工程款 2门
/ Engineering style 2 doors

	工程款 2门 全冷藏 Engineering style 2 doors full refrigerated	工程款 2门 全冷冻 Engineering style 2 doors full frozen
型号 Model	CN-XG-8108-LC-R05L2A	CN-XG-8108-LD-F05L2A
尺寸 Size(mm)	620*760*1980	620*760*1980
功率/电压 Power/Voltage	385W/220V	550W/220V
产品容积 Product volume	445L	445L
温度范围 Temperature range	2°C~8°C	0°C~-18°C
制冷方式 Refrigeration method	风冷 Air-cooled	风冷 Air-cooled



/ 工程款 4门
/ Engineering style 4 doors

	工程款 4门 全冷藏 Engineering style 4 doors full refrigerated	工程款 4门 全冷冻 Engineering style 4 doors full frozen	工程款 4门 双温 Engineering style 4 doors double temperature
型号 Model	CN-XG-8108-LC-R10L4A	CN-XG-8108-LD-F10L4A	CN-XG-8108-SW-FR10L4A
尺寸 Size(mm)	1210*760*1980	1210*760*1980	1210*760*1980
功率/电压 Power/Voltage	580W/220V	840W/220V	900W/220V
产品容积 Product volume	915L	915L	冷藏 Refrigerated 435L+冷冻 Freezing 435L
温度范围 Temperature range	2°C~8°C	0°C~-18°C	冷藏 Refrigerated 2°C~8°C, 冷冻 Freezing 0°C~-18°C
制冷方式 Refrigeration method	风冷 Air-cooled	风冷 Air-cooled	风冷 Air-cooled



/ 工程款 6门
/ Engineering style 6 doors

	工程款 6门 全冷藏 Engineering style 6 doors full refrigerated	工程款 6门 全冷冻 Engineering style 6 doors full frozen	工程款 6门 双温 Engineering style 6 doors double temperature
型号 Model	CN-XG-8108-LC-R16L6A	CN-XG-8108-LD-F16L6A	CN-XG-8108-SW-FR16L6A
尺寸 Size(mm)	1810*760*1980	1810*760*1980	1810*760*1980
功率/电压 Power/Voltage	995W/220V	1350W/220V	1100W/220V
产品容积 Product volume	1440L	1440L	冷藏 Refrigerated 905L+冷冻 Freezing 435L
温度范围 Temperature range	2°C~8°C	0°C~-18°C	冷藏 Refrigerated 2°C~8°C, 冷冻 Freezing 0°C~-18°C
制冷方式 Refrigeration method	风冷 Air-cooled	风冷 Air-cooled	风冷 Air-cooled



/ 连锁款 4门
/ Chain style 4 doors

	连锁款 4门 全冷藏 Chain style 4 doors full refrigerated	连锁款 4门 全冷冻 Chain style 4 doors full frozen	连锁款 4门 双温 Chain style 4 doors double temperature
型号 Model	CN-8124-FLLC-4M	CN-8124-FLLD-4M	CN-8124-FLSW-4M
尺寸 Size(mm)	1200*700*1970	1200*700*1970	1200*700*1970
功率/电压 Power/Voltage	290W/220V	530W/220V	540W/220V
产品容积 Product volume	920L	920L	900L
温度范围 Temperature range	2°C~8°C	-5°C~-18°C	冷藏 Refrigerated 2°C~8°C, 冷冻 Freezing -5°C~-18°C
制冷方式 Refrigeration method	风冷 Air-cooled	风冷 Air-cooled	风冷 Air-cooled



连锁款 6门
Chain style 6 doors

	连锁款 6门 全冷藏 Chain style 6 doors full refrigerated	连锁款 6门 全冷冻 Chain style 6 doors full frozen
型号 Model	CN-8124-FLLC-6M	CN-8124-FLLD-6M
尺寸 Size(mm)	1800*700*1970	1800*700*1970
功率/电压 Power/Voltage	530W/220V	735W/220V
产品容积 Product volume	1420L	1420L
温度范围 Temperature range	2°C~8°C	-5°C~-18°C
制冷方式 Refrigeration method	风冷 Air-cooled	风冷 Air-cooled

	连锁款 6门 双温 (4藏2冻) Chain style 6 doors double temperature (4 refrigerated 2 frozen)	连锁款 6门 双温 (2藏4冻) Chain style 6 doors double temperature (2 refrigerated 4 frozen)
型号 Model	CN-8124-FLSW-6M-4C2D	CN-8124-FLSW-6M-2C4D
尺寸 Size(mm)	1800*700*1970	1800*700*1970
功率/电压 Power/Voltage	660W/220V	790W/220V
产品容积 Product volume	1350L	1350L
温度范围 Temperature range	冷藏 Refrigerated 2°C~8°C, 冷冻 Frozen -5°C~-18°C	冷藏 Refrigerated 2°C~8°C, 冷冻 Frozen -5°C~-18°C
制冷方式 Refrigeration method	风冷 Air-cooled	风冷 Air-cooled

直冷立式冷柜

Direct-cooling vertical freezer

- 双压缩机设计
Dual compressor design
- 全铜管制冷
All-copper tube refrigeration



/ 创业款 4门
/ Startup Style 4 doors



/ 创业款 6门
/ Startup Style 6 doors



/ 连锁款 4门
/ Chain style 4 doors



/ 连锁款 6门
/ Chain style 6 doors

创业款 4门 全冷藏
Startup style 4 doors full refrigerated

创业款 4门 全冷冻
Startup style 4 doors full frozen

创业款 4门 双温
Startup style 4 doors double temperature

型号 Model	CN-8124-ZLLC 4M C+	CN-8124-ZLLD 4M C+	CN-8124-ZLSW 4M C+
尺寸 Size(mm)	1200*700*1970	1200*700*1970	1200*700*1970
功率/电压 Power/Voltage	230W/220V	370W/220V	300W/220V
产品容积 Product volume	920L	920L	920L
温度范围 Temperature range	0°C~10°C	≤-15°C	冷藏 Refrigerated 0°C~10°C, 冷冻 Frozen ≤-15°C
制冷方式 Refrigeration method	直冷 Direct cooling	直冷 Direct cooling	直冷 Direct cooling

创业款 6门 全冷藏
Startup style 6 doors full refrigerated

创业款 6门 全冷冻
Startup style 6 doors full frozen

创业款 6门 双温
Startup style 6 doors double temperature

型号 Model	CN-8124-ZLLC 6M C+	CN-8124-ZLLD 6M C+	CN-8124-ZLSW 6M C+
尺寸 Size(mm)	1800*700*1970	1800*700*1970	1800*700*1970
功率/电压 Power/Voltage	230W/220V	500W/220V	390W/220V
产品容积 Product volume	1420L	1420L	1420L
温度范围 Temperature range	0°C~10°C	≤-15°C	冷藏 Refrigerated 0°C~10°C, 冷冻 Frozen ≤-15°C
制冷方式 Refrigeration method	直冷 Direct cooling	直冷 Direct cooling	直冷 Direct cooling

连锁款 4门 全冷藏
Chain style 4 doors full refrigerated

连锁款 4门 全冷冻
Chain style 4 doors full frozen

连锁款 4门 双温
Chain style 4 doors double temperature

型号 Model	CN-8124-ZLLC 4M B+	CN-8124-ZLLD 4M B+	CN-8124-ZLSW 4M B+
尺寸 Size(mm)	1200*700*1970	1200*700*1970	1200*700*1970
功率/电压 Power/Voltage	260W/220V	550W/220V	330W/220V
产品容积 Product volume	920L	920L	920L
温度范围 Temperature range	0°C~10°C	≤-18°C	冷藏 Refrigerated 0°C~10°C, 冷冻 Frozen ≤-18°C
制冷方式 Refrigeration method	直冷 Direct cooling	直冷 Direct cooling	直冷 Direct cooling

连锁款 6门 全冷藏
Chain style 6 doors full refrigerated

连锁款 6门 全冷冻
Chain style 6 doors full frozen

连锁款 6门 双温
Chain style 6 doors double temperature

型号 Model	CN-8124-ZLLC 6M B+	CN-8124-ZLLD 6M B+	CN-8124-ZLSW 6M B+
尺寸 Size(mm)	1800*700*1970	1800*700*1970	1800*700*1970
功率/电压 Power/Voltage	260W/220V	640W/220V	500W/220V
产品容积 Product volume	1420L	1420L	1420L
温度范围 Temperature range	0°C~10°C	≤-18°C	冷藏 Refrigerated 0°C~10°C, 冷冻 Frozen ≤-18°C
制冷方式 Refrigeration method	直冷 Direct cooling	直冷 Direct cooling	直冷 Direct cooling



	工程款 4门 全冷冻 Engineering style 4 doors full frozen	工程款 4门 双温 Engineering style 4 doors double temperature
型号 Model	CN-8124-ZLLD 4M A-S	CN-8124-ZLSW 4M A-S
尺寸 Size(mm)	1200*750*1970	1200*750*1970
功率/电压 Power/Voltage	640W/220V	500W/220V
产品容积 Product volume	980L	980L
温度范围 Temperature range	≤-22°C	冷藏 Refrigerated 0°C~10°C, 冷冻 Frozen ≤-22°C
制冷方式 Refrigeration method	直冷 Direct cooling	直冷 Direct cooling



	工程款 6门 全冷冻 Engineering style 6 doors full frozen	工程款 6门 双温 Engineering style 6 doors double temperature
型号 Model	CN-8124-ZLLD 6M A-S	CN-8124-ZLSW 6M A-S
尺寸 Size(mm)	1800*750*1970	1800*750*1970
功率/电压 Power/Voltage	810W/220V	585W/220V
产品容积 Product volume	1520L	1520L
温度范围 Temperature range	≤-22°C	冷藏 Refrigerated 0°C~10°C, 冷冻 Frozen ≤-22°C
制冷方式 Refrigeration method	直冷 Direct cooling	直冷 Direct cooling

智能解冻柜

Intelligent thawing cabinet

- 微波低温解冻
Microwave low-temperature thawing
- 智能控制，操作简单
Intelligent control, simple operation



单门
Single door



双门
Double door

	单门 Single door	双门 Double door
型号 Model	CN-KSMQ-JDG-620L1	CN-KSMQ-JDG-1220L2
尺寸 Size (mm)	620*760*1980	1220*760*1980
功率/电压 Power/Voltage	1200W/220V	1800W/220V
解冻能力 Thawing capacity	80斤/8小时 80 pounds per 8 hours	160斤/8小时 160 pounds per 8 hours
解冻温度 Thawing temperature	0°C~8°C	0°C~8°C
解冻方式 Thawing method	微波低温解冻 Microwave low-temperature thawing	微波低温解冻 Microwave low-temperature thawing

速冻柜

Quick-freezing cabinet

- 风冷无霜，急速冷冻
Air-cooled frost-free, rapid freezing
- 进口压缩机
Imported compressor



/ 速冻柜 -45°C 单门 (3-18盘)

/ Quick-freezing cabinet -45°C, single door (3-18 plates)



/ 速冻柜 -45°C 双门 (24-30盘)

/ Quick-freezing cabinet -45°C, double door (24-30 plates)

-45°C

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	盘数 Number of plates	温度范围 Temperature range
CN-CBY-SD3P-45	640*850*1000	0.9KW	220V	3	-45°C~+3°C
CN-CBY-SD5P-45	790*900*1220	1.5KW	220V	5	-45°C~+3°C
CN-CBY-SD8P-45	790*900*1320	1.5KW	220V	8	-45°C~+3°C
CN-CBY-SD10P-45	790*900*1640	1.6KW	220V	10	-45°C~+3°C
CN-CBY-SD12P-45	790*900*1920	2KW	220V	12	-45°C~+3°C
CN-CBY-SD15P-45	790*900*1920	2.1KW	220V/380V	15	-45°C~+3°C
CN-CBY-SD15P-H45	790*900*1920	3KW	220V/380V	15	-45°C~+3°C
CN-CBY-SD18P-45	790*900*2100	3KW	220V/380V	18	-45°C~+3°C
CN-CBY-SD24P-45	1570*900*1920	4KW	220V/380V	24	-45°C~+3°C
CN-CBY-SD30P-45	1570*900*1920	5.5KW	220V/380V	30	-45°C~+3°C



/ 速冻柜 -45°C 推车式单门 (15-20盘)

/ Quick-freezing cabinet -45°C trolley type single door (15-20 plates)



/ 速冻柜 -45°C 推车式双门 (30-40盘)

/ Quick-freezing cabinet -45°C trolley type double door (30-40 plates)

-45°C 推车式 -45°C trolley type

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	盘数 Number of plates	温度范围 Temperature range
CN-CBY-SD15P-TC-45	1050*940*2300	3KW/380V	15	-45°C~+3°C
CN-CBY-SD20P-TC-45	1050*940*2300	3.5KW/380V	20	-45°C~+3°C
CN-CBY-SD30P-TC-45	1900*940*2300	5KW/380V	30	-45°C~+3°C
CN-CBY-SD40P-TC-45	1900*940*2300	6KW/380V	40	-45°C~+3°C



速冻柜 -80°C (7盘)
Quick-freezing cabinet -80°C (7 plates)



速冻柜 -80°C (16盘)
Quick-freezing cabinet -80°C (16 plates)

-80°C

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	盘数 Number of plates	温度范围 Temperature range
CN-CBY-SD7P-80	810*920*1320	3KW/220V	7	-80°C~+3°C
CN-CBY-SD16P-80	810*920*2050	4KW/380V	16	-80°C~+3°C



速冻柜 -80°C 推车式单门 (15-20盘)
Quick-freezing cabinet -80°C trolley type single door (15-20 plates)



速冻柜 -80°C 推车式双门 (30-40盘)
Quick-freezing cabinet -80°C trolley type double door (30-40 plates)

-80°C 推车式 -80°C trolley type

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	盘数 Number of plates	温度范围 Temperature range
CN-CBY-SD15P-TC-80	1050*940*2300	5KW/380V	15	-80°C~+3°C
CN-CBY-SD20P-TC-80	1050*940*2300	6.5KW/380V	20	-80°C~+3°C
CN-CBY-SD30P-TC-80	1900*940*2300	9.5KW/380V	30	-80°C~+3°C
CN-CBY-SD40P-TC-80	1900*940*2300	12.5KW/380V	40	-80°C~+3°C

风冷保鲜工作台

Air-cooled preservation workbench

- 风冷无霜，冷藏/冷冻
Air-cooled frost-free, refrigerated/frozen
- 品牌压缩机，全铜管制冷
Brand compressor, all-copper tube refrigeration



/ 连锁款
/ Chain style

连锁款 全冷藏 Chain style full refrigerated

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产品容积 Product volume	温度范围 Temperature range	制冷方式 Refrigeration method
CN-8124-FLLC-1.2	1200*800*800	230W/220V	260L	2°C~8°C	风冷 Air-cooled
CN-8124-FLLC-1.5	1500*800*800	230W/220V	360L	2°C~8°C	风冷 Air-cooled
CN-8124-FLLC-1.8	1800*800*800	230W/220V	460L	2°C~8°C	风冷 Air-cooled
CN-8124-FLLC-2.0	2000*800*800	230W/220V	530L	2°C~8°C	风冷 Air-cooled

连锁款 全冷冻 Chain style full frozen

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产品容积 Product volume	温度范围 Temperature range	制冷方式 Refrigeration method
CN-8124-FLLD-1.2	1200*800*800	315W/220V	260L	-5°C~-18°C	风冷 Air-cooled
CN-8124-FLLD-1.5	1500*800*800	315W/220V	360L	-5°C~-18°C	风冷 Air-cooled
CN-8124-FLLD-1.8	1800*800*800	330W/220V	460L	-5°C~-18°C	风冷 Air-cooled
CN-8124-FLLD-2.0	2000*800*800	450W/220V	530L	-5°C~-18°C	风冷 Air-cooled



/ 工程款
/ Engineering style

工程款 全冷藏 Engineering style full refrigerated

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产品容积 Product volume	温度范围 Temperature range	制冷方式 Refrigeration method
CN-XG-8108-LC-R02L2A	1200*760*800	340W/220V	280L	2°C~8°C	风冷 Air-cooled
CN-XG-8108-LC-R025L2A	1500*760*800	400W/220V	400L	2°C~8°C	风冷 Air-cooled
CN-XG-8108-LC-R04L2A	1800*760*800	425W/220V	480L	2°C~8°C	风冷 Air-cooled

工程款 全冷冻 Engineering style full frozen

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产品容积 Product volume	温度范围 Temperature range	制冷方式 Refrigeration method
CN-XG-8108-LD-F02L2A	1200*760*800	380W/220V	280L	0°C~-18°C	风冷 Air-cooled
CN-XG-8108-LD-F025L2A	1500*760*800	425W/220V	400L	0°C~-18°C	风冷 Air-cooled
CN-XG-8108-LD-F04L2A	1800*760*800	475W/220V	480L	0°C~-18°C	风冷 Air-cooled

直冷保鲜工作台

Direct-cooling preservation workbench

- 全铜管制冷，加厚发泡层
All-copper tube refrigeration, thickened foaming layer
- 201不锈钢机身
201 stainless steel body



/ 创业款
/ Startup Style

创业款 全冷藏 Startup Style full refrigerated

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产品容积 Product volume	温度范围 Temperature range	制冷方式 Refrigeration method
CN-8124-ZLLC-1.2 C+	1200*800*800	115W/220V	280L	0°C~10°C	直冷 Direct cooling
CN-8124-ZLLC-1.5 C+	1500*800*800	115W/220V	380L	0°C~10°C	直冷 Direct cooling
CN-8124-ZLLC-1.8 C+	1800*800*800	115W/220V	480L	0°C~10°C	直冷 Direct cooling
CN-8124-ZLLC-2.0 C+	2000*800*800	115W/220V	550L	0°C~10°C	直冷 Direct cooling

创业款 全冷冻 Startup Style full frozen

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产品容积 Product volume	温度范围 Temperature range	制冷方式 Refrigeration method
CN-8124-ZLLD-1.2 C+	1200*800*800	180W/220V	280L	-5°C~-15°C	直冷 Direct cooling
CN-8124-ZLLD-1.5 C+	1500*800*800	185W/220V	380L	-5°C~-15°C	直冷 Direct cooling
CN-8124-ZLLD-1.8 C+	1800*800*800	245W/220V	480L	-5°C~-15°C	直冷 Direct cooling
CN-8124-ZLLD-2.0 C+	2000*800*800	280W/220V	550L	-5°C~-15°C	直冷 Direct cooling

创业款 双温 Startup Style double temperature

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产品容积 Product volume	温度范围 Temperature range	制冷方式 Refrigeration method
CN-8124-ZLSW-1.2 C+	1200*800*800	180W/220V	260L	冷藏0°C~10°C, 冷冻-5°C~-15°C Refrigerate 0°C~10°C, Frozen -5°C~-15°C	直冷 Direct cooling
CN-8124-ZLSW-1.5 C+	1500*800*800	185W/220V	365L	冷藏0°C~10°C, 冷冻-5°C~-15°C Refrigerate 0°C~10°C, Frozen -5°C~-15°C	直冷 Direct cooling
CN-8124-ZLSW-1.8 C+	1800*800*800	245W/220V	465L	冷藏0°C~10°C, 冷冻-5°C~-15°C Refrigerate 0°C~10°C, Frozen -5°C~-15°C	直冷 Direct cooling
CN-8124-ZLSW-2.0 C+	2000*800*800	280W/220V	540L	冷藏0°C~10°C, 冷冻-5°C~-15°C Refrigerate 0°C~10°C, Frozen -5°C~-15°C	直冷 Direct cooling



/ 连锁款
/ Chain style

连锁款 全冷藏 Chain style full refrigerated

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产品容积 Product volume	温度范围 Temperature range	制冷方式 Refrigeration method
CN-8124-ZLLC-1.2 B+	1200*800*800	115W/220V	280L	0°C~10°C	直冷 Direct cooling
CN-8124-ZLLC-1.5 B+	1500*800*800	115W/220V	380L	0°C~10°C	直冷 Direct cooling
CN-8124-ZLLC-1.8 B+	1800*800*800	115W/220V	480L	0°C~10°C	直冷 Direct cooling
CN-8124-ZLLC-2.0 B+	2000*800*800	115W/220V	550L	0°C~10°C	直冷 Direct cooling

连锁款 全冷冻 Chain style full frozen

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产品容积 Product volume	温度范围 Temperature range	制冷方式 Refrigeration method
CN-8124-ZLLD-1.2 B+	1200*800*800	180W/220V	280L	-5°C~-18°C	直冷 Direct cooling
CN-8124-ZLLD-1.5 B+	1500*800*800	185W/220V	380L	-5°C~-18°C	直冷 Direct cooling
CN-8124-ZLLD-1.8 B+	1800*800*800	280W/220V	480L	-5°C~-18°C	直冷 Direct cooling
CN-8124-ZLLD-2.0 B+	2000*800*800	280W/220V	550L	-5°C~-18°C	直冷 Direct cooling

连锁款 双温 Chain style double temperature

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产品容积 Product volume	温度范围 Temperature range	制冷方式 Refrigeration method
CN-8124-ZLSW-1.2 B+	1200*800*800	180W/220V	260L	冷藏0°C~10°C, 冷冻-5°C~-18°C Refrigerate 0°C~10°C, Frozen -5°C~-18°C	直冷 Direct cooling
CN-8124-ZLSW-1.5 B+	1500*800*800	185W/220V	365L	冷藏0°C~10°C, 冷冻-5°C~-18°C Refrigerate 0°C~10°C, Frozen -5°C~-18°C	直冷 Direct cooling
CN-8124-ZLSW-1.8 B+	1800*800*800	280W/220V	465L	冷藏0°C~10°C, 冷冻-5°C~-18°C Refrigerate 0°C~10°C, Frozen -5°C~-18°C	直冷 Direct cooling
CN-8124-ZLSW-2.0 B+	2000*800*800	280W/220V	540L	冷藏0°C~10°C, 冷冻-5°C~-18°C Refrigerate 0°C~10°C, Frozen -5°C~-18°C	直冷 Direct cooling



/ 工程款
/ Engineering style

工程款 全冷藏 Engineering style full refrigerated

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产品容积 Product volume	温度范围 Temperature range	制冷方式 Refrigeration method
CN-8124-ZLLC-1.2 A	1200*800*800	115W/220V	280L	0°C~10°C	直冷 Direct cooling
CN-8124-ZLLC-1.5 A	1500*800*800	115W/220V	380L	0°C~10°C	直冷 Direct cooling
CN-8124-ZLLC-1.8 A	1800*800*800	115W/220V	480L	0°C~10°C	直冷 Direct cooling
CN-8124-ZLLC-2.0 A	2000*800*800	115W/220V	550L	0°C~10°C	直冷 Direct cooling

工程款 全冷冻 Engineering style full frozen

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产品容积 Product volume	温度范围 Temperature range	制冷方式 Refrigeration method
CN-8124-ZLLD-1.2 A-S	1200*800*800	180W/220V	280L	-5°C~-22°C	直冷 Direct cooling
CN-8124-ZLLD-1.5 A-S	1500*800*800	185W/220V	380L	-5°C~-22°C	直冷 Direct cooling
CN-8124-ZLLD-1.8 A-S	1800*800*800	280W/220V	480L	-5°C~-22°C	直冷 Direct cooling
CN-8124-ZLLD-2.0 A-S	2000*800*800	280W/220V	550L	-5°C~-22°C	直冷 Direct cooling

工程款 双温 Engineering style double temperature

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产品容积 Product volume	温度范围 Temperature range	制冷方式 Refrigeration method
CN-8124-ZLSW-1.2 A-S	1200*800*800	180W/220V	260L	冷藏0°C~10°C, 冷冻-5°C~-22°C Refrigerate 0°C~10°C, Frozen -5°C~-22°C	直冷 Direct cooling
CN-8124-ZLSW-1.5 A-S	1500*800*800	185W/220V	365L	冷藏0°C~10°C, 冷冻-5°C~-22°C Refrigerate 0°C~10°C, Frozen -5°C~-22°C	直冷 Direct cooling
CN-8124-ZLSW-1.8 A-S	1800*800*800	280W/220V	465L	冷藏0°C~10°C, 冷冻-5°C~-22°C Refrigerate 0°C~10°C, Frozen -5°C~-22°C	直冷 Direct cooling
CN-8124-ZLSW-2.0 A-S	2000*800*800	280W/220V	540L	冷藏0°C~10°C, 冷冻-5°C~-22°C Refrigerate 0°C~10°C, Frozen -5°C~-22°C	直冷 Direct cooling

雪花冰机

Snowflake ice machine

- 快速出冰，10档调速
Quick ice extraction, 10-speed adjustment
- 品牌压缩机
Brand compressor



创业款 风冷 Startup style air cooling

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	日产量 Daily output	滚轴长度 Roller length
CN-XHBJ-8120-SM-120D-FL	360*500*510	1000W/220V	180kg	92mm



创业升级款 风冷 Startup upgrade style air cooling

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	日产量 Daily output	滚轴长度 Roller length
CN-XHBJ-8120-SM-130D-FL	400*520*540	1300W/220V	200kg	95mm



至尊款 风冷 Supreme style air cooling

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	日产量 Daily output	滚轴长度 Roller length
CN-XHBJ-8120-SM-160D-FL	400*520*540	1600W/220V	300kg	120mm



连锁款 风冷 Chain style air cooling

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	日产量 Daily output	滚轴长度 Roller length
CN-XHBJ-8003-100-FL	400*540*520	880W/220V	250kg	100mm



旗舰款 风冷 Flagship style air cooling

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	日产量 Daily output	滚轴长度 Roller length
CN-KSMQ-XHBJ-138CP-AC	435*540*570	1280W/220V	360kg	138mm

雪融机

Snow melting machine

- 30分钟快速出冰
Quick ice out in 30 minutes
- 品牌压缩机
Brand compressor



豪华款 单缸 Luxury style single cylinder

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	温度范围 Temperature range
CN-MLK-SM1120	230*550*800	570W/220V	12L	-5°C~+5°C



豪华款 双缸 Luxury style double cylinder

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	温度范围 Temperature range
CN-MLK-SM2120	430*550*800	850W/220V	24L	-5°C~+5°C



豪华款 三缸 Luxury style triple cylinder

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	温度范围 Temperature range
CN-MLK-SM3120	630*550*800	900W/220V	36L	-5°C~+5°C

冷热双温饮料机

Cold and hot dual-temperature beverage machine

- 冷热双温，四季可用
Cold and hot dual temperature, suitable for all seasons
- 搅拌型/喷淋型
Stirring type/spray type



/ 豪华款搅拌-
单缸单温

/ Luxurious style stirring -
Single cylinder, single temperature



/ 豪华款搅拌-
单缸双温

/ Luxurious style stirring -
Single cylinder, double temperature



/ 豪华款搅拌-
双缸单温

/ Luxurious style stirring -
Double cylinder, single temperature



/ 豪华款搅拌-
双缸双温

/ Luxurious style stirring -
Double cylinder, double temperature

豪华款搅拌 单缸 Luxurious style stirring single cylinder

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	温度范围 Temperature range
CN-TG-1A-GZJ145	265*375*700	制冷 Refrigeration: 145W/220V	16L	制冷 Refrigeration: 0°C~10°C
CN-TG-1C-GZJ605	265*375*700	制冷 Refrigeration: 145W/220V, 制热 Heating: 605W/220V	16L	制冷 Refrigeration: 0°C~10°C, 制热 Heating: 20°C~65°C

豪华款搅拌 双缸 Luxurious style stirring double cylinder

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	温度范围 Temperature range
CN-TG-2A-GZJ235	420*450*680	制冷 Refrigeration: 235W/220V	16L*2	制冷 Refrigeration: 0°C~10°C
CN-TG-2C-GZJ1210	420*450*680	制冷 Refrigeration: 235W/220V, 制热 Heating: 1210W/220V	16L*2	制冷 Refrigeration: 0°C~10°C, 制热 Heating: 20°C~65°C



/ 豪华款搅拌-
三缸单温

/ Luxurious style stirring -
Triple cylinder, single temperature



/ 豪华款搅拌-
三缸双温

/ Luxurious style stirring -
Triple cylinder, double temperature



/ 至尊款搅拌-
双缸双温

/ Supreme Style stirring -
Double cylinder, double temperature

豪华款搅拌 三缸 Luxurious style stirring triple cylinder

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	温度范围 Temperature range
CN-TG-3A-GZJ330	620*450*680	制冷 Refrigeration: 330W/220V	16L*3	制冷 Refrigeration: 0°C~10°C
CN-TG-3C-GZJ1830	620*450*680	制冷 Refrigeration: 330W/220V, 制热 Heating: 1830W/220V	16L*3	制冷 Refrigeration: 0°C~10°C, 制热 Heating: 20°C~65°C

至尊款搅拌 双缸 Supreme style stirring double cylinder

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	温度范围 Temperature range
CN-TG-2A-GZJ1210	450*410*740	制冷 Refrigeration: 275W/220V, 制热 Heating: 1270W/220V	16L*2	制冷 Refrigeration: 0°C~10°C, 制热 Heating: 20°C~65°C



/ 豪华款喷淋-
单缸单温

/ Luxurious style spray

Single cylinder, single temperature



/ 豪华款喷淋-
单缸双温

/ Luxurious style spray

Single cylinder, double temperature



/ 豪华款喷淋-
双缸单温

/ Luxurious style spray

Double cylinder, single temperature



/ 豪华款喷淋-
双缸双温

/ Luxurious style spray

Double cylinder, double temperature

豪华款喷淋 单缸 Luxurious style spray single cylinder

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	温度范围 Temperature range
CN-TG-1B-GZJ175	265*375*700	制冷 Refrigeration: 175W/220V	16L	制冷 Refrigeration: 0°C~10°C
CN-TG-1D-GZJ650	265*375*700	制冷 Refrigeration: 175W/220V, 制热 Heating: 650W/220V	16L	制冷 Refrigeration: 0°C~10°C, 制热 Heating: 20°C~65°C

豪华款喷淋 双缸 Luxurious style spray double cylinder

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	温度范围 Temperature range
CN-TG-2B-GZJ285	420*450*680	制冷 Refrigeration: 285W/220V	16L*2	制冷 Refrigeration: 0°C~10°C
CN-TG-2D-GZJ1270	420*450*680	制冷 Refrigeration: 285W/220V, 制热 Heating: 1270W/220V	16L*2	制冷 Refrigeration: 0°C~10°C, 制热 Heating: 20°C~65°C



/ 豪华款喷淋-
三缸单温

/ Luxurious style spray

Triple cylinder, single temperature



/ 豪华款喷淋-
三缸双温

/ Luxurious style spray

Triple cylinder, double temperature

豪华款喷淋 三缸 Luxurious style spray triple cylinder

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	容量 Capacity	温度范围 Temperature range
CN-TG-3B-GZJ450	620*450*680	制冷 Refrigeration: 450W/220V	16L*3	制冷 Refrigeration: 0°C~10°C
CN-TG-3D-GZJ1860	620*450*680	制冷 Refrigeration: 450W/220V, 制热 Heating: 1860W/220V	16L*3	制冷 Refrigeration: 0°C~10°C, 制热 Heating: 20°C~65°C

吧台冷藏柜

Bar counter refrigeration cabinet

- 360°风冷循环
360° air-cooled circulation
- 双层玻璃隔热锁冷
Double-layer glass for heat insulation and cold locking



/ 不锈钢单门
/ Stainless steel single door



/ 不锈钢双门
/ Stainless steel double door



/ 不锈钢三门
/ Stainless steel triple door

	不锈钢单门 Stainless steel single door	不锈钢双门 Stainless steel double door	不锈钢三门 Stainless steel triple door
型号 Model	CN-LN-SHB-108LF-W	CN-LN-SHB-230L2F-W	CN-LN-SHB-350L3F-W
尺寸 Size(mm)	500*550*860	900*550*860	1350*550*860
功率/电压 Power/Voltage	185W/220V	200W/220V	230W/220V
温度范围 Temperature range	2°C~8°C	2°C~8°C	2°C~8°C
容积 Volume	108L	230L	350L



/ 黑色单门
/ Black single door



/ 黑色双门
/ Black double door



/ 黑色三门
/ Black triple doors

	黑色单门 Black single door	黑色双门 Black double door	黑色三门 Black triple door
型号 Model	CN-LN-SHB-108LF-B	CN-LN-SHB-230L2F-B	CN-LN-SHB-350L3F-B
尺寸 Size(mm)	500*550*860	900*550*860	1350*550*860
功率/电压 Power/Voltage	185W/220V	200W/220V	230W/220V
温度范围 Temperature range	2°C~8°C	2°C~8°C	2°C~8°C
容积 Volume	108L	230L	350L

片冰机

Flake ice machine

- 3分钟快速出冰
Quick ice out in 3 minutes
- 大容量储冰桶
Large-capacity ice storage bucket



片冰机 Flake ice machine

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产冰量/天 Ice production/day	储冰量 Ice storage capacity
CN-LR-03T	780*905*1610	1.49KW/220V	300kg	150kg
CN-LR-05T	1100*960*1810	2.37KW/380V	500kg	300kg
CN-LR-08T	1100*960*1810	2.88KW/380V	800kg	300kg
CN-LR-1T	1100*960*1810	4.11KW/380V	1000kg	300kg



片冰机 Flake ice machine

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产冰量/天 Ice production/day	储冰量 Ice storage capacity
CN-LR-1.5T	1310*1260*2055	7.29KW/380V	1500kg	400kg
CN-LR-2T	1500*1350*2200	8.31KW/380V	2000kg	500kg
CN-LR-2.5T	1500*1350*2350	10.67KW/380V	2500kg	500kg
CN-LR-3T	1750*1480*2690	11.59KW/380V	3000kg	1500kg

商用制冰机

Commercial ice maker

- 24小时预约定时
24-hour appointment timing
- 冰满自停，缺水保护
Ice full stop, lack of water protection



/ 吧台式制冰机-风冷
(60-70冰格)

/ Bar top ice maker - air-cooled
(60-70 ice grids)



/ 吧台式制冰机-水冷
(60-70冰格)

/ Bar top ice maker - water-cooled
(60-70 ice grids)



/ 吧台式制冰机-风冷
(90-108冰格)

/ Bar top ice maker - air-cooled
(90-108 ice grids)



/ 吧台式制冰机-水冷
(90-108冰格)

/ Bar top ice maker - water-cooled
(90-108 ice grids)

吧台式制冰机 Bar counter ice maker

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	冰格数 Number of ice grids	制冷方式 Refrigeration method	产冰量/天 Ice production/day	储冰量 Ice storage capacity
CN-8015-BTZBJ-600F-FL	600*700*800	300W/220V	60冰格 Ice cube tray	风冷 Air-cooled	70kg	43kg
CN-8015-BTZBJ-600J-SL	600*700*800	300W/220V	60冰格 Ice cube tray	水冷 Water-cooled	70kg	43kg
CN-8015-BTZBJ-800F-FL	800*700*800	400W/220V	70冰格 Ice cube tray	风冷 Air-cooled	80kg	48kg
CN-8015-BTZBJ-800J-SL	800*700*800	400W/220V	70冰格 Ice cube tray	水冷 Water-cooled	80kg	48kg
CN-8015-BTZBJ-1000F-FL	1000*700*800	500W/220V	90冰格 Ice cube tray	风冷 Air-cooled	100kg	55kg
CN-8015-BTZBJ-1000J-SL	1000*700*800	500W/220V	90冰格 Ice cube tray	水冷 Water-cooled	100kg	55kg
CN-8015-BTZBJ-1200F-FL	1200*700*800	600W/220V	108冰格 Ice cube tray	风冷 Air-cooled	120kg	55kg
CN-8015-BTZBJ-1200J-SL	1200*700*800	600W/220V	108冰格 Ice cube tray	水冷 Water-cooled	120kg	55kg



/ 一体式制冰机-风冷
(24-40冰格)

/ Integrated ice maker - air-cooled
(24-40 ice cube trays)



/ 一体式制冰机-风冷
(45冰格)

/ Integrated ice maker - air-cooled
(45 ice cube trays)



/ 一体式制冰机-风冷
(50-70冰格)

/ Integrated ice maker - air-cooled
(50-70 ice cube trays)



/ 一体式制冰机-风冷
(90-108冰格)

/ Integrated ice maker - air-cooled
(90-108 ice cube trays)

一体式制冰机 Integrated ice maker

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	冰格数 Number of ice grids	制冷方式 Refrigeration method	产冰量/天 Ice production/day	储冰量 Ice storage capacity
CN-8015-YTZBJ-20F	354*428*637	200W/220V	24冰格 Ice cube tray	风冷 Air-cooled	30kg	12kg
CN-8015-YTZBJ-30F	354*428*637	230W/220V	32冰格 Ice cube tray	风冷 Air-cooled	40kg	12kg
CN-8015-YTZBJ-40F	354*428*637	230W/220V	40冰格 Ice cube tray	风冷 Air-cooled	50kg	12kg
CN-8015-YTZBJ-48F	440*432*773	300W/220V	45冰格 Ice cube tray	风冷 Air-cooled	68kg	15kg
CN-8015-YTZBJ-50F	500*430*798	330W/220V	50冰格 Ice cube tray	风冷 Air-cooled	80kg	18kg
CN-8015-YTZBJ-68F	500*430*798	430W/220V	70冰格 Ice cube tray	风冷 Air-cooled	90kg	18kg
CN-8015-YTZBJ-98F	656*675*880	550W/220V	90冰格 Ice cube tray	风冷 Air-cooled	120kg	43kg
CN-8015-YTZBJ-118F	656*675*880	610W/220V	108冰格 Ice cube tray	风冷 Air-cooled	140kg	43kg



/ 分体式制冰机-风冷
/ Split ice maker - air-cooled



/ 分体式制冰机-水冷
/ Split-type ice maker - water-cooled

分体式制冰机 Split-type ice maker

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	冰格数 Number of ice grids	制冷方式 Refrigeration method	产冰量/天 Ice production/day	储冰量 Ice storage capacity
CN-8015-FTZBJ-Z300-FL	580*810*1620	1050W/220V	156冰格 Ice cube tray	风冷 Air-cooled	200kg	120kg
CN-8015-FTZBJ-Z300-SL	580*810*1620	1050W/220V	156冰格 Ice cube tray	水冷 Water-cooled	200kg	120kg
CN-8015-FTZBJ-Z400-FL	580*810*1620	1350W/220V	182冰格 Ice cube tray	风冷 Air-cooled	250kg	120kg
CN-8015-FTZBJ-Z400-SL	580*810*1620	1350W/220V	182冰格 Ice cube tray	水冷 Water-cooled	250kg	120kg
CN-8015-FTZBJ-Z500-FL	780*860*1720	1800W/220V	234冰格 Ice cube tray	风冷 Air-cooled	300kg	150kg
CN-8015-FTZBJ-Z500-SL	780*860*1720	1800W/220V	234冰格 Ice cube tray	水冷 Water-cooled	300kg	150kg
CN-8015-FTZBJ-Z700-FL	780*860*1820	2000W/220V	306冰格 Ice cube tray	风冷 Air-cooled	380kg	150kg
CN-8015-FTZBJ-Z700-SL	780*860*1820	2000W/220V	306冰格 Ice cube tray	水冷 Water-cooled	380kg	150kg
CN-8015-FTZBJ-Z800-FL	780*860*1930	2000W/220V	342冰格 Ice cube tray	风冷 Air-cooled	450kg	150kg
CN-8015-FTZBJ-Z800-SL	780*860*1930	2000W/220V	342冰格 Ice cube tray	水冷 Water-cooled	450kg	150kg
CN-8015-FTZBJ-Z900-FL	780*860*1930	2000W/220V	399冰格 Ice cube tray	风冷 Air-cooled	520kg	150kg
CN-8015-FTZBJ-Z900-SL	780*860*1930	2000W/220V	399冰格 Ice cube tray	水冷 Water-cooled	520kg	150kg
CN-8015-FTZBJ-Z1000-FL	780*860*1930	2000W/200V	483冰格 Ice cube tray	风冷 Air-cooled	600kg	150kg
CN-8015-FTZBJ-Z1000-SL	780*860*1930	2000W/200V	483冰格 Ice cube tray	水冷 Water-cooled	600kg	150kg



/ 分体式制冰机 (月牙冰)-水冷
/ Split-type ice maker (crescent ice)- water-cooled

分体式制冰机 (月牙冰) Split-type ice maker (crescent ice)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	冰格数 Number of ice grids	制冷方式 Refrigeration method	产冰量/天 Ice production/day	储冰量 Ice storage capacity
CN-8015-YYZBJ-ZY300-SL	560*850*1720	1000W/220V	160冰格 Ice cube tray	水冷 Water-cooled	200kg	120kg
CN-8015-YYZBJ-ZY500-SL	780*860*1820	1200W/220V	224冰格 Ice cube tray	水冷 Water-cooled	300kg	120kg
CN-8015-YYZBJ-ZY700-SL	780*860*1820	1500W/220V	320冰格 Ice cube tray	水冷 Water-cooled	400kg	120kg

CHINENG FOOD MACHINERY SERIES

驰能 | 食品机械系列

包子机·饺子机·面条机·切菜机·绞肉机

BUN MACHINE, DUMPLING MACHINE, NOODLE MACHINE,
VEGETABLE CUTTER, MEAT GRINDER



全自动包子机

Fully automatic steamed bun machine

- 12褶花纹成型
12 pleat pattern forming
- 一机操作顶10人
One machine can operate as many as ten people



豪华款 台式直供面 Luxurious style table type direct supply surface

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency
CN-BZJ-ZGW-X	720*920*1100	1.2KW/220V	2600个/时 2,600 per hour

企业款 台式直供面 (304) Enterprise style table type direct supply surface (304)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency
CN-BZJ-ZGW-X304	720*920*1100	1.2KW/220V	2600个/时 2,600 per hour



豪华款 台式斜供面 Luxurious style table type direct supply surface

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency
CN-BZJ-XG-X	920*720*1140	1.0KW/220V	2600个/时 2,600 per hour

企业款 台式斜供面 (304) Enterprise style table type direct supply surface (304)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency
CN-BZJ-XG-X304	920*720*1140	1.0KW/220V	2600个/时 2,600 per hour



旗舰款 台式斜供面
/ Flagship style table inclined supply surface



企业款 台式斜供面 (304)
/ Enterprise style countertop inclined supply surface (304)



企业款 台式斜供面 (304)
/ Enterprise style countertop inclined supply surface (304)

	旗舰款 Flagship style	企业款 Enterprise style (304)	企业款 Enterprise style (304)
型号 Model	CN-BZJ-XG-PS	CN-BZJ-XG-PS304	CN-BZJ-XGD-PS304
尺寸 Size(mm)	910*710*1160	910*710*1160	910*710*1160
功率/电压 Power/Voltage	0.7KW/220V	0.7KW/220V	0.7KW/220V
生产效率 Production efficiency	1500个/时 1,500 per hour	1500个/时 1,500 per hour	1500个/时 1,500 per hour



至尊款 柜式直供面 Supreme style cabinet-type direct supply surface

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency
CN-8077-BZJ-ZGM-X-201	1465/750*710*1710	1.2KW/220V	3000个/时 3,000 per hour



至尊款 立式单斗 Supreme style standing single bucket

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency
CN-BZJ-LD-X	1450/850*710*1700	1.2KW/220V	2600个/时 2,600 per hour

企业款 立式单斗 (304) Enterprise style standing single bucket (304)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency
CN-BZJ-LD-X304	1450/850*710*1700	1.2KW/220V	2600个/时 2,600 per hour



至尊款 立式双斗 Supreme style standing double bucket

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency
CN-BZJ-LS-X	1450*710*1700	2.4KW/220V	3600个/时 3,600 per hour

企业款 立式双斗 (304) Enterprise style standing double bucket (304)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency
CN-BZJ-LS-X304	1450*710*1700	2.4KW/220V	3600个/时 3,600 per hour



至尊款 柜式直供面 Supreme style cabinet-type direct supply surface

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency
CN-BZJ-GSZ-X	1450/850*710*1700	1.2KW/220V	3000个/时 3,000 per hour

企业款 柜式直供面 (304) Enterprise style cabinet-type direct supply surface (304)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency
CN-BZJ-GSZ-X304	1450/850*710*1700	1.2KW/220V	3000个/时 3,000 per hour



至尊款 包子馒头一体机

/ Supreme Style Steamed Bun and Mantou all-in-one machine



至尊款 包子拍饼一体机

/ Supreme Style Steamed Buns and Pancakes all-in-one machine

至尊款 Supreme style

型号 Model	CN-BYJ-X	CN-BPY-X
尺寸 Size(mm)	1450*710*1700	1450*710*1700
功率/电压 Power/Voltage	1.2KW/220V	1.2KW/220V
生产效率 Production efficiency	2600个/时 2,600 per hour	2600个/时 2,600 per hour



至尊款 柜式斜供面 Supreme style cabinet-style inclined supply surface

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency
CN-BZJ-GSX-X	1500/950*710*1620	1.2KW/220V	2600个/时 2,600 per hour

企业款 柜式斜供面 (304) Enterprise style cabinet-type inclined supply surface (304)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency
CN-BZJ-GSX-X304	1500/950*710*1620	1.2KW/220V	2600个/时 2,600 per hour



至尊款 柜式双斗斜供面 Supreme style cabinet-style double bucket inclined supply surface

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency
CN-BZJ-GSXS-X	1500*710*1620	2.4KW/220V	3600个/时 3,600 per hour

企业款 柜式双斗斜供面 (304) Enterprise style cabinet-style double bucket inclined supply surface (304)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency
CN-BZJ-GSXS-X304	1500*710*1620	2.4KW/220V	3600个/时 3,600 per hour



旗舰款 包子摆盘一体机 Flagship style steamed stuffed bun plate machine

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency
CN-BYT-PS	1530*1300*1700	1.0KW/220V	3000个/时 3,000 per hour

企业款 包子摆盘一体机 (304) Enterprise style steamed stuffed bun plate machine (304)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency
CN-BYT-PS304	1530*1300*1700	1.0KW/220V	3000个/时 3,000 per hour



旗舰款 柜式斜供面

/ Flagship style cabinet inclined supply surface



企业款 柜式斜供面 (304)

/ Enterprise style cabinet inclined supply surface (304)



企业款 柜式斜供面 (304)

/ Enterprise style cabinet inclined supply surface (304)

旗舰款 Flagship style

企业款 Enterprise style (304)

企业款 Enterprise style (304)

型号 Model	CN-BZJ-GSX-PS	CN-BZJ-GSX-PS304	CN-BZJ-GSXD-PS304
尺寸 Size(mm)	1260*620*1530	1260*620*1530	1260*620*1530
功率/电压 Power/Voltage	1.1KW/220V	1.1KW/220V	1.1KW/220V
生产效率 Production efficiency	2000个/时 2,000 per hour	2000个/时 2,000 per hour	2000个/时 2,000 per hour



升级款
Upgrade style



按键款
Key style



触屏款
Touch screen style

	升级款 Upgrade style	按键款 Key style	触屏款 Touch screen style
型号 Model	CN-XZ-BZ-30/1.2	CN-XZ-85A-AJ/1.55	CN-XZ-87-CP/1.55
尺寸 Size(mm)	705*1180*1440	720*1600*1600	720*1600*1600
功率 Power	1.2KW	1.55KW	1.55KW
电压 Voltage	220V/380V	220V/380V	220V/380V
生产效率 Production efficiency	1800个/时 1,800 per hour	3600个/时 3,600 per hour	3600个/时 3,600 per hour



刀切馒头机 Knife-cut steamed bun machine

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	生产效率 Production efficiency
CN-XZ-MP800A-1.4	3300*610*1330	1.4KW	220V/380V	7200个/时 7,200 per hour



卷面式包子机 Rolling steamed bun machine

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	生产效率 Production efficiency
CN-XZ-290IIA-1.8	2680*1500*1420	1.8KW	220V/380V	3600个/时 3,600 per hour



旗舰款 Flagship style

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	生产效率 Production efficiency
CN-YMT-8027-65/2	1390*450*910	3KW	220V/380V	4000个/时 4,000 per hour

全自动饺子机

Fully automatic dumpling machine

- 一机可省10人工
One machine can save 10 workers
- 仿手工包合饺子
Imitation hand-wrapped dumplings



旗舰款 130型饺子机 Flagship style 130-type dumpling machine

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency
CN-FSG-JZ-W130	1500/800*650*1550	0.6KW/220V	4000个/时 4,000 per hour

旗舰款 130型饺子机 (304) Flagship style 130-type dumpling machine (304)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency
CN-FSG-JZ-WX130	1500/800*650*1550	0.6KW/220V	4000个/时 4,000 per hour



旗舰款 180型饺子机 Flagship style 180-type dumpling machine

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency
CN-FSG-JZ-W180	1850/1100*700*1100	0.75KW/220V	8000个/时 8,000 per hour

旗舰款 180型饺子机 (304) Flagship style 180-type dumpling machine (304)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency
CN-FSG-JZ-WX180	1850/1100*700*1100	0.75KW/220V	8000个/时 8,000 per hour



智能款 Smart style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency
CN-FSG-ZN-P200	1500*650*1230	0.8KW/220V	10000个/时 10,000 per hour

智能款 (304) Smart style (304)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency
CN-FSG-ZN-PS200	1500*650*1230	0.8KW/220V	10000个/时 10,000 per hour



/ 台式煎饺机
/ Desktop dumpling frying machine



/ 160型饺子机
/ 160 type dumpling machine



/ 210型饺子机
/ 210 type dumpling machine

台式煎饺机 Desktop dumpling frying machine 160型饺子机 160 type dumpling machine 210型饺子机 210 type dumpling machine

型号 Model	CN-TS-JZ-P90	CN-XZ-JGB160	CN-XZ-JGB210
尺寸 Size(mm)	770*360*740	1675*560*1015	1965*608*1375
功率 Power	0.09KW	1.2KW	1.55KW
电压 Voltage	220V	220V	220V/380V
生产效率 Production efficiency	1500个/时 1,500 per hour	10000个/时 10,000 per hour	20000个/时 20,000 per hour

全自动压面机

Fully automatic pasta machine

- 多道压面系统
Multi-pass surface pressing system
- 可定制不同规格面刀
Customized face knives of different specifications are available



/ 压面切面机 (无面刀)

/ Surface pressing and cutting machine (without surface knife)



/ 压面切面机 (有面刀)

/ Surface pressing and cutting machine (with surface knives)

压面切面机 Dough pressing and cutting machine

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	配置 Configuration	产量 Output
CN-YMJ-8019-25	390*320*860	1.5KW/220V	无面刀 Faceless knife	25kg/h
CN-YMJ-8019-30	440*320*860	2.2KW/220V	无面刀 Faceless knife	30kg/h
CN-YMJ-8019-35	490*320*860	2.2KW/220V	无面刀 Faceless knife	35kg/h
CN-YMJ-FD-8019-25	390*320*860	1.5KW/220V	方刀 Square knife	25kg/h
CN-YMJ-FD-8019-30	440*320*860	2.2KW/220V	方刀 Square knife	30kg/h
CN-YMJ-FD-8019-35	490*320*860	2.2KW/220V	方刀 Square knife	35kg/h
CN-YMJ-YD-8019-25	390*320*860	1.5KW/220V	圆刀 Round knife	25kg/h
CN-YMJ-YD-8019-30	440*320*860	2.2KW/220V	圆刀 Round knife	30kg/h
CN-YMJ-YD-8019-35	490*320*860	2.2KW/220V	圆刀 Round knife	35kg/h
CN-YMJ-FYD-8019-25	390*320*860	1.5KW/220V	方刀+圆刀 Square knife + round knife	25kg/h
CN-YMJ-FYD-8019-30	440*320*860	2.2KW/220V	方刀+圆刀 Square knife + round knife	30kg/h
CN-YMJ-FYD-8019-35	490*320*860	2.2KW/220V	方刀+圆刀 Square knife + round knife	35kg/h



/ 高速型压面机

/ High-speed pasta machine

高速型压面机 High-speed pasta machine

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产量 Output
CN-YMJ-8019-G25	590*650*1080	2.2KW/220V	100kg/h
CN-YMJ-8019-G30	640*670*1090	2.2KW/220V	150kg/h



/ 豪华型压面面条机

/ Luxury type noodle press

豪华型压面面条机 Luxury type noodle press

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	压面厚度 Thickness of pressed surface	产量 Output
CN-RQJ60	1000*510*1180	1.5KW/380V	0.6-20mm	60-80kg/h



/ 350经济款
/ 350 Economy Style



/ 350A精装款
/ 350A hardcover style



/ 500A自动压面机
/ 500A automatic pasta machine

350经济款 350 Economy Style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	压面厚度 Thickness of pressed surface	产量 Output
CN-XZ-YMZD-350B-220/2.2	1070*620*1020	2.2KW/220V	7-18mm	550kg/h
CN-XZ-YMZD-350B-380/2.2	1070*620*1020	2.2KW/380V	7-18mm	550kg/h

350A精装款 350A Hardcover style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	压面厚度 Thickness of pressed surface	产量 Output
CN-XZ-YMZD-350A-220/2.2	1140*630*1070	2.2KW/220V	5-25mm	700kg/h
CN-XZ-YMZD-350A-380/2.2	1140*630*1070	2.2KW/380V	5-25mm	700kg/h

500A自动压面机 500A Automatic pressing machine

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	压面厚度 Thickness of pressed surface	产量 Output
CN-XZ-YMZD-500A-220/3	1310*770*1220	3KW/220V	8-25mm	1000kg/h
CN-XZ-YMZD-500A-380/3	1310*770*1220	3KW/380V	8-25mm	1000kg/h

多功能搅拌机 Multifunctional mixer

- 三档速度调节
Three-speed adjustment
- 搅拌/和面/打发
Stir/knead/whip



多功能搅拌机 Multifunctional mixer

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	料桶容积 Volume of barrel
CN-8027-SZM10-220V/0.5	465*375*663	0.5KW	220V	10L
CN-8027-SZM15-220V/0.6	475*375*678	0.6KW	220V	15L
CN-8027-SZM10-220V/380V/1.1	540*450*800	1.1KW	220V/380V	20L
CN-8027-SZM25-220V/380V/1.25	560*460*800	1.25KW	220V/380V	25L
CN-8027-SZM30-220V/380V/1.25	560*460*800	1.25KW	220V/380V	30L

智能和面机

Intelligent dough mixer

- 双速双动 均匀和面
Double-speed and double-action uniform dough mixing
- 智能定时和面
Intelligent timed dough kneading



/ 创业款
/ Startup style



/ 连锁款
/ Chain style

创业款 Startup style

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	和面量 Kneading amount
CN-JHMJ-8019-7.5	570*450*600	0.75KW	220V	5-7.5kg (含水) (Water)
CN-JHMJ-8019-15	680*530*710	1.5KW	220V	10-15kg (含水) (Water)
CN-JHMJ-8019-25	780*600*730	2.2KW	220V	15-25kg (含水) (Water)
CN-JHMJ-8019-50	690*905*895	3KW	220V/380V	30-50kg (含水) (Water)

连锁款 Chain style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	和面量 Kneading amount
CN-SDHMJ-8019-20	400*750*880	1.1KW/220V	4-8kg (不含水) (Without water)
CN-SDHMJ-8019-30	430*800*910	1.5KW/220V	6-12kg (不含水) (Without water)
CN-SDHMJ-8019-40	490*860*960	2.2KW/220V、3KW/380V	8-16kg (不含水) (Without water)
CN-SDHMJ-8019-50	490*860*960	2.2KW/220V、3KW/380V	10-20kg (不含水) (Without water)



/ 连锁升级款 (变频)
/ Chain upgrade style (variable frequency)



/ 企业款 翻缸和面机
/ Enterprise style pot flipping and dough mixing machine

连锁升级款 (变频) Chain upgrade style (variable frequency)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	和面量 Kneading amount
CN-BPHMJ-8065-HF20-S	397*706*797	1.5KW/220V	8kg (不含水) (Without water)
CN-BPHMJ-8065-HF30-S	425*742*812	2.2KW/220V	12kg (不含水) (Without water)

企业款 翻缸和面机 Enterprise style pot flipping and dough mixing machine

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	和面量 Kneading amount
CN-FGHMJ-8065-Ti-200A	1530*1500*1550	7.3KW/380V	50kg (不含水) (Without water)
CN-FGHMJ-8065-Ti-300A	1540*1540*1650	13.5KW/380V	75kg (不含水) (Without water)
CN-FGHMJ-8065-Ti-400A	1640*1640*1750	16.5KW/380V	100kg (不含水) (Without water)
CN-FGHMJ-8065-Ti-500A	1700*1640*1800	20KW/380V	125kg (不含水) (Without water)

智能醒发箱

Intelligent proofing box

- 温湿独立控制
Independent control of temperature and humidity
- 热风循环 快速发酵
Rapid fermentation through hot air circulation



/ 旋钮款 (6盘)
/ Knob style (6 plates)



/ 旋钮款 (13-16盘)
/ Knob style (13-16 plates)

	旋钮款 6盘 Knob style 6 plates	旋钮款 13盘 Knob style 13 plates	旋钮款 16盘 Knob style 16 plates
型号 Model	CN-FXX-8093-6A	CN-FXX-8093-13A	CN-FXX-8093-16A
尺寸 Size(mm)	500*690*1125	500*690*1740	500*690*2005
功率/电压 Power/Voltage	2.6KW/220V	2.6KW/220V	2.6KW/220V
温度范围 Temperature range	室温 Room temperature -85°C	室温 Room temperature-85°C	室温 Room temperature-85°C
湿度范围 Humidity range	室温 Room temperature-110%RH	室温 Room temperature-110%RH	室温 Room temperature-110%RH



/ 旋钮款 (26-32盘)
/ Knob style (26-32 plates)

	旋钮款 26盘 Knob style 26 plates	旋钮款 32盘 Knob style 32 plates
型号 Model	CN-FXX-8093-26A	CN-FXX-8093-32A
尺寸 Size(mm)	960*690*1740	960*690*2005
功率/电压 Power/Voltage	2.8KW/220V	2.8KW/220V
温度范围 Temperature range	室温 Room temperature -85°C	室温 Room temperature -85°C
湿度范围 Humidity range	室温 Room temperature-110%RH	室温 Room temperature-110%RH



/ 电脑款 (6盘)
/ Computer style (6 plates)



/ 电脑款 (13-16盘)
/ Computer style (13-16 plates)

	电脑款 6盘 Computer style 6 plates	电脑款 13盘 Computer style 13 plates	电脑款 16盘 Computer style 16 plates
型号 Model	CN-DFXX-8093-6AS	CN-DFXX-8093-13AS	CN-DFXX-8093-16AS
尺寸 Size(mm)	500*690*1125	500*690*1740	500*690*2005
功率/电压 Power/Voltage	2.6KW/220V	2.6KW/220V	2.6KW/220V
温度范围 Temperature range	室温 Room temperature -85°C	室温 Room temperature -85°C	室温 Room temperature -85°C
湿度范围 Humidity range	室温 Room temperature-110%RH	室温 Room temperature-110%RH	室温 Room temperature-110%RH



/ 电脑款 (26-32盘)
/ Computer style (26-32 plates)

	电脑款 26盘 Computer style 26 plates	电脑款 32盘 Computer style 32 plates
型号 Model	CN-DFXX-8093-26AS	CN-DFXX-8093-32AS
尺寸 Size(mm)	960*690*1740	960*690*2005
功率/电压 Power/Voltage	2.8KW/220V	2.8KW/220V
温度范围 Temperature range	室温 Room temperature -85°C	室温 Room temperature -85°C
湿度范围 Humidity range	室温 Room temperature-110%RH	室温 Room temperature-110%RH



/ 蒸笼专用款 (6盘)

/ Steamer special style (6 plates)



/ 蒸笼专用款 (10盘)

/ Steamer special style (10 plates)



/ 蒸笼专用款 (20盘)

/ Steamer special style (20 plates)

	蒸笼专用款 6盘 Steamer special style 6 plates	蒸笼专用款 10盘 Steamer special style 10 plates	蒸笼专用款 20盘 Steamer special style 20 plates
型号 Model	CN-FXX-8093-6	CN-FXX-8093-10	CN-FXX-8093-20
尺寸 Size(mm)	670*690*1445	670*690*2005	1360*690*2005
功率/电压 Power/Voltage	2.6KW/220V	2.6KW/220V	2.8KW/220V
温度范围 Temperature range	室温 Room temperature -85°C	室温 Room temperature -85°C	室温 Room temperature -85°C
湿度范围 Humidity range	室温 Room temperature-110%RH	室温 Room temperature-110%RH	室温 Room temperature-110%RH

全自动面条机

Fully automatic noodle machine

- 减轻开店负担
Reduce the burden of opening a store
- 快速出面 现吃现做
Quickly come out and cook on the spot



/ 标准款
/ Standard style



/ 旗舰款
/ Flagship style

	标准款 Standard style	旗舰款 Flagship style
型号 Model	CN-8115-QZDMTJ-1	CN-8115-QZDMTJ-2
主机尺寸 Main machine size (mm)	700*320*1180	770*320*1180
底柜尺寸 Bottom cabinet size (mm)	770*390*510	770*390*510
功率/电压 Power/Voltage	1KW/220V	1KW/220V
面桶容积 Volume of the face bucket	7.5KG	7.5KG
产品效率 Product efficiency	≥150份/时 ≥150 portions per hour	180份/时 180 copies per hour

自动切菜机

Automatic vegetable cutter

- 多功能切菜
Multi-functional vegetable cutter
- 纯铜电机，持久动力
Pure copper motor, long-lasting power



/ 台式刹菜机
/ Desktop vegetable cutter



/ 豪华款双头切菜机 J803
/ Luxury style double head vegetable cutter J803



/ 豪华款双头切菜机 J801
/ Luxury style double head vegetable cutter J801

	台式刹菜机 Desktop vegetable cutter	豪华款双头切菜机 Luxury style double head vegetable cutter	豪华款双头切菜机 Luxury style double head vegetable cutter
型号 Model	CN-SCJ-8019-350	CN-QCJ-8106-XST-J803	CN-QCJ-8106-ST-J801
尺寸 Size(mm)	480*430*480	900*650*1100	1200*650*1300
功率/电压 Power/Voltage	370W/220V	1800W/220V	3100W/220V
生产效率 Production efficiency	80kg/h	200-800kg/h	300-1000kg/h



/ 至尊款单头切菜机
/ Supreme style single head vegetable cutter



/ 至尊款双头切菜机 B801
/ Supreme style double head vegetable cutter B801



/ 至尊款双头切菜机 B801B
/ Supreme style double head vegetable cutter B801B

	至尊款单头切菜机 Supreme style single head vegetable cutter	至尊款双头切菜机 Supreme style double head vegetable cutter	至尊款双头切菜机 Supreme style double head vegetable cutter
型号 Model	CN-QCJ-8076-B680	CN-QCJ-8076-ST-B801	CN-QCJ-FSX-8076-B801B
尺寸 Size(mm)	750*500*900	1200*580*1140	1330*580*1270
功率/电压 Power/Voltage	1500W/220V	1870W/220V	1870W/220V
生产效率 Production efficiency	200-500kg/h	600-1000kg/h	600-1000kg/h



/ 旗舰款双头切菜机 608
/ Flagship style double head cutter 608



/ 旗舰款双头切菜机 610
/ Flagship style double head cutter 610

旗舰款双头切菜机 Flagship style double head cutter			
型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency
CN-MJ-608	1220*600*1300	1375W/220V	600-1200kg/h
CN-MJ-608-380V	1220*600*1300	1375W/380V	600-1200kg/h
CN-MJ-610	1240*600*1300	2500W/220V	600-1200kg/h
CN-MJ-610-380V	1240*600*1300	2500W/380V	600-1200kg/h



切葱机
Scallion cutter



姜丝机
Ginger thread machine



蒜泥打碎机
Garlic puree crusher

	切葱机 Scallion cutter	姜丝机 Ginger thread machine	蒜泥打碎机 Garlic puree crusher
型号 Model	CN-MJ-526-220	CN-MJ-835	CN-MJ-766S
尺寸 Size(mm)	420*410*540	510*450*600	650*350*700
功率/电压 Power/Voltage	130W/220V	375W/220V	750W/220V
生产效率 Production efficiency	25kg/h	300kg/h	500kg/h

多功能绞肉机 Multi-functional meat grinder

- 绞肉/灌肠
Minced meat / enema
- 可拆卸，易清洗
Detachable and easy to clean



台式绞肉机
Desktop meat grinder



小巨人台式绞肉机
Little giant countertop meat grinder



绞切多用机
Meat mince multi-purpose machine

台式绞肉机 Desktop meat grinder				
型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency	转速 Rotational speed (RPM)
CN-TY-RYH15S	580*270*415	1.8KW/220V	150kg/h	220
CN-TY-RYH25S	580*270*415	2.2KW/220V	220kg/h	220
CN-TY-RYH35S/220	580*270*415	2.5KW/220V	320kg/h	220
CN-TY-RYH35S/380	580*270*415	2.5KW/380V	320kg/h	220

小巨人台式绞肉机 Little giant countertop meat grinder				
型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency	转速 Rotational speed (RPM)
CN-TY-RS25/220	580*260*415	2.5KW/220V	250kg/h	187
CN-TY-RS25/380	580*260*415	2.5KW/380V	250kg/h	187
CN-TY-RS35/220	580*260*415	3.0KW/220V	350kg/h	187
CN-TY-RS35/380	580*260*415	3.0KW/380V	350kg/h	187

绞切多用机 Meat mince multi-purpose machine				
型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	生产效率 Production efficiency	转速 Rotational speed (RPM)
CN-TY-RC2-159	435*420*440	1.5KW/220V	绞 Ground meat: 150kg/h, 切片 Slicing: 300kg/h	180
CN-TY-RC2-259	435*420*440	1.8KW/220V	绞 Ground meat: 250kg/h, 切片 Slicing: 300kg/h	180

绞肉切肉机

Meat grinder and slicer

- 绞肉/灌肠/切片/切丝/切丁
Mince meat / sausage / slice / shred / dice
- 纯铜电机，运行稳定
Pure copper motor, stable operation



/ 绞切两用机

/ Grinding and cutting dual-purpose machine



/ 绞切两用机

/ Grinding and cutting dual-purpose machine



/ 立式绞肉机

/ Vertical meat grinder

	绞切两用机 Grinding and cutting dual-purpose machine	绞切两用机 Grinding and cutting dual-purpose machine	立式绞肉机 Vertical meat grinder
型号 Model	CN-YF-JQ70	CN-YF-JQ70Z	CN-YF-LJ200
尺寸 Size(mm)	660*460*800	660*460*800	410*420*730
功率/电压 Power/Voltage	2200W/220V	2200W/220V	2200W/220V
生产效率 Production efficiency	250kg/h	250kg/h	300kg/h



/ 立式切肉机

/ Vertical meat slicer



/ 小型台式切肉机

/ Small countertop meat slicer



/ 立式切肉机 130L

/ Vertical meat slicer 130L

	立式切肉机 Vertical meat slicer	小型台式切肉机 Small countertop meat slicer	立式切肉机 Vertical meat slicer 130L
型号 Model	CN-YF-WQ400	CN-YF-TQ400	CN-YF-130L
尺寸 Size(mm)	390*500*730	360*325*380	545*330*660
功率/电压 Power/Voltage	1500W/220V	850W/220V	850W/220V
生产效率 Production efficiency	300kg/h	200kg/h	500kg/h

冻排骨切块机

Frozen pork rib cutting machine

- 锋利刀组，高效切块
Sharp knife set, efficient cutting into pieces
- 易维护，可换刀盘
Easy to maintain and the tool head can be replaced



冻排骨切块机 Frozen pork rib cutting machine

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产量 Output
CN-DY-303B	595*1080*1085	3KW/380V	500kg/h

毛刷清洗去皮机

Brush cleaning and peeling machine

- 波浪形毛刷，无死角清洗
Wavy brush, no blind spots for cleaning
- 自动过滤果皮、泥沙
Automatically filter fruit peels and sand



8076型 8076 Type

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	工作效率 Work efficiency
CN-QPJ-8076-MS-B600	810*680*980	1.1KW/380V	500kg/h
CN-QPJ-8076-MS-B1000	1200*680*980	1.1KW/380V	800kg/h
CN-QPJ-8076-MS-B1500	1800*720*980	1.5KW/380V	1000kg/h



DY型 DY Type

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	工作效率 Work efficiency
CN-DY-M80-Y	1110*800*980	1.1KW/380V	500kg/h
CN-DY-M100-Y	1310*800*980	1.1KW/380V	600kg/h
CN-DY-M150-Y	1810*800*1000	1.5KW/380V	1000kg/h
CN-DY-M180-Y	2110*800*1000	1.5KW/380V	1500kg/h



冬瓜去皮机 单头
/ Winter melon peeler single head



冬瓜去皮机 双头
/ Winter melon peeler double head

冬瓜去皮机 Winter melon peeler

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	工作效率 Work efficiency	规格 Specification
CN-DY-DX80-1	700*600*1800	0.8KW/380V	100个/h	单头 Single head
CN-DY-DX80-2	1200*700*1800	1.6KW/380V	200个/h	双头 Double head

商用开水器

Commercial water boiler

- 自动进水 防干烧
Automatic water intake to prevent dry burning
- 316不锈钢发热管
316 stainless steel heating tube



/ 指针型 (30L)
/ Pointer type (30L)



/ 指针型 (60-120L)
/ Pointer type (60-120L)



/ 指针型 (150-210L)
/ Pointer type (150-210L)

标准款 Standard style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产水量 Water production volume
CN-KSQ-8129-ZZ-03	400*260*660	3KW/220V	30L/h
CN-KSQ-8129-ZZ-06	400*260*730	6KW/220V	60L/h
CN-KSQ-8129-ZZ-06-2	400*260*730	6KW/380V	60L/h
CN-KSQ-8129-ZZ-09	460*260*830	9KW/380V	90L/h
CN-KSQ-8129-ZZ-12	480*260*920	12KW/380V	120L/h
CN-KSQ-8129-ZZ-15	510*260*1120	15KW/380V	150L/h
CN-KSQ-8129-ZZ-18	510*260*1200	18KW/380V	180L/h
CN-KSQ-8129-ZZ-21	510*260*1290	21KW/380V	210L/h

保温款 Insulated style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产水量 Water production volume
CN-KSQ-8129-ZZ-03B	400*260*660	3KW/220V	30L/h
CN-KSQ-8129-ZZ-06B	400*260*730	6KW/220V	60L/h
CN-KSQ-8129-ZZ-06B-2	400*260*730	6KW/380V	60L/h
CN-KSQ-8129-ZZ-09B	460*260*830	9KW/380V	90L/h
CN-KSQ-8129-ZZ-12B	480*260*920	12KW/380V	120L/h
CN-KSQ-8129-ZZ-15B	510*260*1120	15KW/380V	150L/h
CN-KSQ-8129-ZZ-18B	510*260*1200	18KW/380V	180L/h
CN-KSQ-8129-ZZ-21B	510*260*1290	21KW/380V	210L/h



数显型 (30L)
Digital display type (30L)



数显型 (60-120L)
Digital display type (60-120L)



数显型 (150-210L)
Digital display type (150-210L)

标准款 Standard style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产水量 Water production volume
CN-KSQ-8129-SX-03	400*260*660	3KW/220V	30L/h
CN-KSQ-8129-SX-06	400*260*730	6KW/220V	60L/h
CN-KSQ-8129-SX-06-2	400*260*730	6KW/380V	60L/h
CN-KSQ-8129-SX-09	460*260*830	9KW/380V	90L/h
CN-KSQ-8129-SX-12	480*260*920	12KW/380V	120L/h
CN-KSQ-8129-SX-15	510*260*1120	15KW/380V	150L/h
CN-KSQ-8129-SX-18	510*260*1200	18KW/380V	180L/h
CN-KSQ-8129-SX-21	510*260*1290	21KW/380V	210L/h

保温款 Insulated style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	产水量 Water production volume
CN-KSQ-8129-SX-03B	400*260*660	3KW/220V	30L/h
CN-KSQ-8129-SX-06B	400*260*730	6KW/220V	60L/h
CN-KSQ-8129-SX-06B-2	400*260*730	6KW/380V	60L/h
CN-KSQ-8129-SX-09B	460*260*830	9KW/380V	90L/h
CN-KSQ-8129-SX-12B	480*260*920	12KW/380V	120L/h
CN-KSQ-8129-SX-15B	510*260*1120	15KW/380V	150L/h
CN-KSQ-8129-SX-18B	510*260*1200	18KW/380V	180L/h
CN-KSQ-8129-SX-21B	510*260*1290	21KW/380V	210L/h

商用饮水机

Commercial water dispenser

- 温热直饮，大出水量
Warm and direct drinking, with a large water output
- 五级超滤，RO反渗透
Five-stage ultrafiltration, RO reverse osmosis



/ 旋钮款1开1温

/ Knob style

1 Boiling water 1 warm water



/ 旋钮款1开2温

/ Knob style

1 Boiling water 2 warm water



/ 旋钮款1开3温

/ Knob style

1 Boiling water 3 warm water



/ 旋钮款1开5温

/ Knob style

1 Boiling water 5 warm water

旋钮款 Knob style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	款式 Style	过滤级别 Filtration level
CN-YSJ-8129-XN-2SJ	505*400*1360	2KW/220V	1开1温 1 Boiling water 1 warm water	三级过滤 Three-stage filtration
CN-YSJ-8129-XN-3SJ	755*400*1480	3KW/220V	1开2温 1 Boiling water 2 warm water	三级过滤 Three-stage filtration
CN-YSJ-8129-XN-4SJ	980*400*1480	4.5KW/380V	1开3温 1 Boiling water 3 warm water	三级过滤 Three-stage filtration
XN-YSJ-8129-XN-6SJ	1435*400*1480	6KW/380V	1开5温 1 Boiling water 5 warm water	三级过滤 Three-stage filtration



/ 触控款1开1温

/ Touch style

1 Boiling water 1 warm water



/ 触控款1开2温

/ Touch style

1 Boiling water 2 warm water



/ 触控款1开3温

/ Touch style

1 Boiling water 3 warm water



/ 触控款1开5温

/ Touch style

1 Boiling water 5 warm water

触控款 Touch style

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	款式 Style	过滤级别 Filtration level
CN-YSJ-8129-CK-2WJ	555*450*1550	2KW/220V	1开1温 1 Boiling water 1 warm water	五级超滤 Five-stage ultrafiltration
CN-YSJ-8129-CK-3WJ	800*450*1550	3KW/220V	1开2温 1 Boiling water 2 warm water	五级超滤 Five-stage ultrafiltration
CN-YSJ-8129-CK-4WJ	1100*450*1550	4.5KW/380V	1开3温 1 Boiling water 3 warm water	五级超滤 Five-stage ultrafiltration
XN-YSJ-8129-CK-6WJ	1640*450*1550	6KW/380V	1开5温 1 Boiling water 5 warm water	五级超滤 Five-stage ultrafiltration

触控款 (RO反渗透) Touch style (RO reverse osmosis)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	款式 Style	过滤级别
CN-YSJ-8129-CK-2RO	555*450*1550	2KW/220V	1开1温 1 Boiling water 1 warm water	RO反渗透 RO Reverse osmosis
CN-YSJ-8129-CK-3RO	800*450*1550	3KW/220V	1开2温 1 Boiling water 2 warm water	RO反渗透 RO Reverse osmosis
CN-YSJ-8129-CK-4RO	1100*450*1550	4.5KW/380V	1开3温 1 Boiling water 3 warm water	RO反渗透 RO Reverse osmosis
CN-YSJ-8129-CK-6RO	1640*450*1550	6KW/380V	1开5温 1 Boiling water 5 warm water	RO反渗透 RO Reverse osmosis

保温售饭台

Insulated food serving counter

- 一体焊接防漏水
One-piece welding for water leakage prevention
- 防干烧保护
Dry-burning protection



/ 三格
/ Three grids



/ 四格
/ Four grids

三格 Three grids

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	温度范围 Temperature range	机身材质 Material of the fuselage
CN-BWT-8119-3	1200*700*800	2KW/220V	0~100°C	201不锈钢 201 stainless steel
CN-BWT-8119-3-304	1200*700*800	2KW/220V	0~100°C	304不锈钢 304 stainless steel

四格 Four grids

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	温度范围 Temperature range	机身材质 Material of the fuselage
CN-BWT-8119-4	1500*700*800	2KW/220V	0~100°C	201不锈钢 201 stainless steel
CN-BWT-8119-4-304	1500*700*800	2KW/220V	0~100°C	304不锈钢 304 stainless steel



/ 五格
/ Five grids



/ 六格
/ Six grids

五格 Five grids

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	温度范围 Temperature range	机身材质 Material of the fuselage
CN-BWT-8119-5	1800*700*800	2KW/220V	0~100°C	201不锈钢 201 stainless steel
CN-BWT-8119-5-304	1800*700*800	2KW/220V	0~100°C	304不锈钢 304 stainless steel

六格 Six grids

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	温度范围 Temperature range	机身材质 Material of the fuselage
CN-BWT-8119-6	2200*700*800	2KW/220V	0~100°C	201不锈钢 201 stainless steel
CN-BWT-8119-6-304	2200*700*800	2KW/220V	0~100°C	304不锈钢 304 stainless steel

CHINENG OIL SMOKE EXHAUST SERIES

驰能 | 抽排系列

商用油烟机·油烟净化一体机·内循环净化油烟机

COMMERCIAL RANGE HOOD, LAMPBLACK PURIFIER,
INTERNAL CIRCULATION PURIFIER RANGE HOOD



商用油烟机

Commercial range hood

- 一级能效 节能省电
First-class energy efficiency saves energy and electricity
- 高温自动清洗
High-temperature automatic cleaning



豪华款 单头
Luxurious style single head



豪华款 双头
Luxurious style double head

豪华款 Luxurious style				
型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	风量 Air volume	规格 Specification
CN-SL-YDC-HZ-60D	600*730*389	530W/220V	24m³/min	单头 Single head
CN-SL-YDC-HZ-90D	900*730*389	530W/220V	24m³/min	单头 Single head
CN-SL-YDC-HZ-120D	1200*730*389	530W/220V	24m³/min	单头 Single head
CN-SL-YDC-HZ-150D	1500*730*389	530W/220V	24m³/min	单头 Single head
CN-SL-YDC-HZ-150S	1500*730*389	530W*2/220V	48m³/min	双头 Double head
CN-SL-YDC-HZ-180S	1800*730*389	530W*2/220V	48m³/min	双头 Double head
CN-SL-YDC-HZ-200S	2000*730*389	530W*2/220V	48m³/min	双头 Double head



豪华商用款
Luxurious commercial style

豪华商用款 Luxurious commercial style				
型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	风量 Air volume	规格 Specification
CN-YYJ-8025-ST1500	1500*900*684	800W*2/220V	38m³/min	双头 Double head
CN-YYT-8025-ST1800	1800*900*684	800W*2/220V	40m³/min	双头 Double head
CN-YYT-8025-ST2000	2000*900*684	800W*2/220V	42m³/min	双头 Double head



/ 工程款 (变频) 单头

/ Engineering style (variable frequency) single head

/ 工程款 (变频) 双头

/ Engineering style (variable frequency) double head

工程款 (变频) Engineering style (variable frequency)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	风量 Air volume	规格 Specification
CN-SL-YDC-BP-CX90D	900*560*672	800W/220V	30m ³ /min	单头 Single head
CN-SL-YDC-BP-CX120D	1200*560*672	800W/220V	30m ³ /min	单头 Single head
CN-SL-YDC-BP-CX150D	1500*560*672	800W/220V	30m ³ /min	单头 Single head
CN-SL-YDC-BP-CX150S	1500*560*672	800W*2/220V	60m ³ /min	双头 Double head
CN-SL-YDC-BP-CX180S	1800*560*672	800W*2/220V	60m ³ /min	双头 Double head
CN-SL-YDC-BP-CX200S	2000*560*672	800W*2/220V	60m ³ /min	双头 Double head

油烟净化一体机

Fume purification integrated machine

■ 强劲秒吸 不留余烟

Powerful instant suction without leaving any smoke

■ 低空直排 低能节耗

Low-altitude direct exhaust is energy-efficient and energy-saving



/ 餐饮连锁款

/ Restaurant chain style



/ 工程款

/ Engineering style

餐饮连锁款 Restaurant chain style

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	风量 Air volume	电场 Electric field
CN-JD-160B-R	1600*1200*995	1.7KW	220V/380V	4000m ³ /h	不锈钢电场*2 Stainless steel electric field *2
CN-JD-180B-R	1800*1200*995	2.7KW	220V/380V	4000m ³ /h	不锈钢电场*2 Stainless steel electric field *2
CN-JD-200B-R	2000*1200*995	2.7KW	220V/380V	6000m ³ /h	不锈钢电场*2 Stainless steel electric field *2
CN-JD-220B-R	2200*1200*995	2.7KW	220V/380V	6000m ³ /h	不锈钢电场*2 Stainless steel electric field *2
CN-JD-240D-R	2400*1200*995	3.7KW	220V/380V	6000m ³ /h	不锈钢电场*3 Stainless steel electric field *3

工程款 Engineering style

型号 Model	尺寸 Size(mm)	功率 Power	电压 Voltage	风量 Air volume	电场 Electric field
CN-RC-JD160	1600*1200*995	1.7KW	220V/380V	4000m ³ /h	不锈钢电场*2 Stainless steel electric field *2
CN-RC-JD180	1800*1200*995	2.7KW	220V/380V	4000m ³ /h	不锈钢电场*2 Stainless steel electric field *2
CN-RC-JD200	2000*1200*995	2.7KW	220V/380V	6000m ³ /h	不锈钢电场*2 Stainless steel electric field *2
CN-RC-JD220	2200*1200*995	2.7KW	220V/380V	6000m ³ /h	不锈钢电场*2 Stainless steel electric field *2
CN-RC-JD240	2400*1200*995	3.7KW	220V/380V	6000m ³ /h	不锈钢电场*3 Stainless steel electric field *3

免烟管内循环净化油烟机

Smoke-free in-pipe circulation purification range hood

- 油烟净化 快速除味
Rapid odor removal through oil fume purification
- 除油/除烟/除味
Oil removal/Smoke removal/odor removal



豪华款 (轻油烟)
Luxurious style (light oil fume)

豪华款 (轻油烟) Luxurious style (light oil fume)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	风量 Air volume	电场 Electric field
CN-8109-KL-DYW12	1200*800*850	360W/220V	2000m³/h	不锈钢电场*1 Stainless steel electric field *1
CN-8109-KL-DYW16	1600*800*850	450W/220V	2500m³/h	不锈钢电场*2 Stainless steel electric field *2
CN-8109-KL-DYW20	2000*800*850	600W/220V	3000m³/h	不锈钢电场*3 Stainless steel electric field *3



旗舰款 (重油烟)
Flagship style (heavy oil fume)

旗舰款 (重油烟) Flagship style (heavy oil fume)

型号 Model	尺寸 Size(mm)	功率/电压 Power/Voltage	风量 Air volume	电场 Electric field
CN-8109-D-ND16	1600*1100*1365	1.8KW/220V	4000m³/h	不锈钢电场*2 Stainless steel electric field *2
CN-8109-D-ND20	2000*1100*1365	2.4KW/220V	5000m³/h	不锈钢电场*3 Stainless steel electric field *3
CN-8109-D-ND24	2400*1100*1365	2.8KW/220V	6000m³/h	不锈钢电场*4 Stainless steel electric field *4

CHINENG COMMERCIAL KITCHEN ENGINEERING

驰能 | 商用厨房工程

单位食堂·连锁餐饮·社会餐饮·酒店会所·中央厨房·配送中心

CANTEEN, CHAIN RESTAURANT, INDEPENDENT RESTAURANT, HOTEL, CENTRAL KITCHEN, CATERING CENTER

PLANNING

规划

量身定制厨房动线，
最大化提升空间效率。

Tailor-made kitchen circulation
to maximize space efficiency.

DESIGN

设计

融合美学与功能性，打造
现代化、智能化的厨房环境。

Integrate aesthetics and functionality
to create a modern and
intelligent kitchen environment.

TRAINING

培训

长期提供设备培训课程，
助力客户实现长效运营。

We have been providing long-term
equipment training courses to help
customers achieve long-term operation.



商用厨房工程案例 (部分)

- 深圳建设集团
- 开立医疗
- 贝特瑞集团
- 美巢湾科技
- 方邦电子
- 中建铁投集团
- 广州南站
- 科视光学
- 慧瓦新材料
- 赛肯户外器械
- 见炬科技
- 鑫辉餐饮集团
- 东方明珠学校
- 高州第三小学
- 虎门捷胜小学
- 大岭山第一幼儿园
- 天降美食机器人中餐厅
- 云海肴云南菜
- 御牛师和牛火锅
- 甘食记成都肥肠粉
- 喜蛙铜锅牛蛙
- 老佛爷铜炉蛙锅
- 非烤勿扰韩式烤肉
- 木屋烧烤
- 彭厨湘菜
- Shenzhen Construction Group
- SonoScape
- BTR Group
- Meichao Bay Biotechnology
- Fangbang Electronics
- China Construction Railway Investment Group
- Guangzhou South Railway Station
- Keshi Optics
- Huipeng New Materials
- Saiken Outdoor equipment
- Jianju Technology
- Xinhui Catering Group
- Oriental Pearl School
- Gaozhou No. 3 Primary School
- Humen Jiesheng Primary School
- Dalingshan No.1 Kindergarten
- Tianjiangmeishi Robot Chinese Restaurant
- Yunhaiyao Yunnan cuisine
- Yuniushi Wagyu Hot Pot
- Ganshiji Chengdu Intestine Noodles
- Xiwa Copper Pot Bullfrog
- Galleries Lafayette's bronze pot frog pot
- Feikaowurao Korean barbecue
- Wooden House Barbecue
- Peng Chef's Hunan cuisine



▲ 开立医疗
SonaScape



▲ 原尚物流
Yuanshang Logistics



▲ 克茗冰室连锁茶餐厅
Keming Chain Tea Restaurant



▲ 虎门捷胜小学
Humen Jiesheng Primary School



▲ 鑫辉餐饮智谷餐厅
Xinhui Catering



▲ 通艺实验学校
Tongyi Experimental School



—— 美食餐饮设备专家 ——
Food and Catering Equipmeng Experts

驰能



京东/天猫/淘宝/1688/拼多多/抖音/百度

CHINENG



TikTok / YouTube / Facebook / Instagram / Google

广东玖尚电子科技有限公司

Guangdong Jiushang Electronic Technology Co., LTD

服务热线 (Hotline): +86 137 9883 6990

驰能生产工厂地址: 广东省东莞市寮步镇敬业中路10号

Production factory: No. 10, Jingye Middle Road, Liaobu Town, Dongguan City, Guangdong Province

驰能营销中心地址: 广东省东莞市虎门镇虎越湾区一号5栋

Marketing Center: Building 5, Huyue Bay Area, Humen Town, Dongguan City, Guangdong Province

CHINENG · Kuala Lumpur, Malaysia: A-1-01, Landmark Residence 1,
Jalan Landmark Residence, 43000 Kajang, Selangor

CHINENG · Johor Bahru, Malaysia: 69, Jalan Impian Emas 22,
Taman Impian Emas, 81300 Skudai, JOHOR.

CHINENG · Việt Nam: Số 88 đường An Điền 159, HL 608,
Khu Phố An Sơn, Phường Long Nguyên, TP HCM.



WhatsApp

+86 137 9883 6990



微信

+86 137 9883 6990